

# Total Maximum Daily Load

## Biological Impairment Due to Nutrients and Organic Enrichment / Low Dissolved Oxygen For Fourteen Mile Creek

### Big Black River Basin

### Hinds County, Mississippi


#### Prepared By

Mississippi Department of  
Environmental Quality  
Office of Pollution Control  
TMDL/WLA Branch

MDEQ  
PO Box 10385  
Jackson, MS 39289-0385  
(601) 961-5171  
[www.deq.state.ms.us](http://www.deq.state.ms.us)



Mississippi Department of  
Environmental Quality

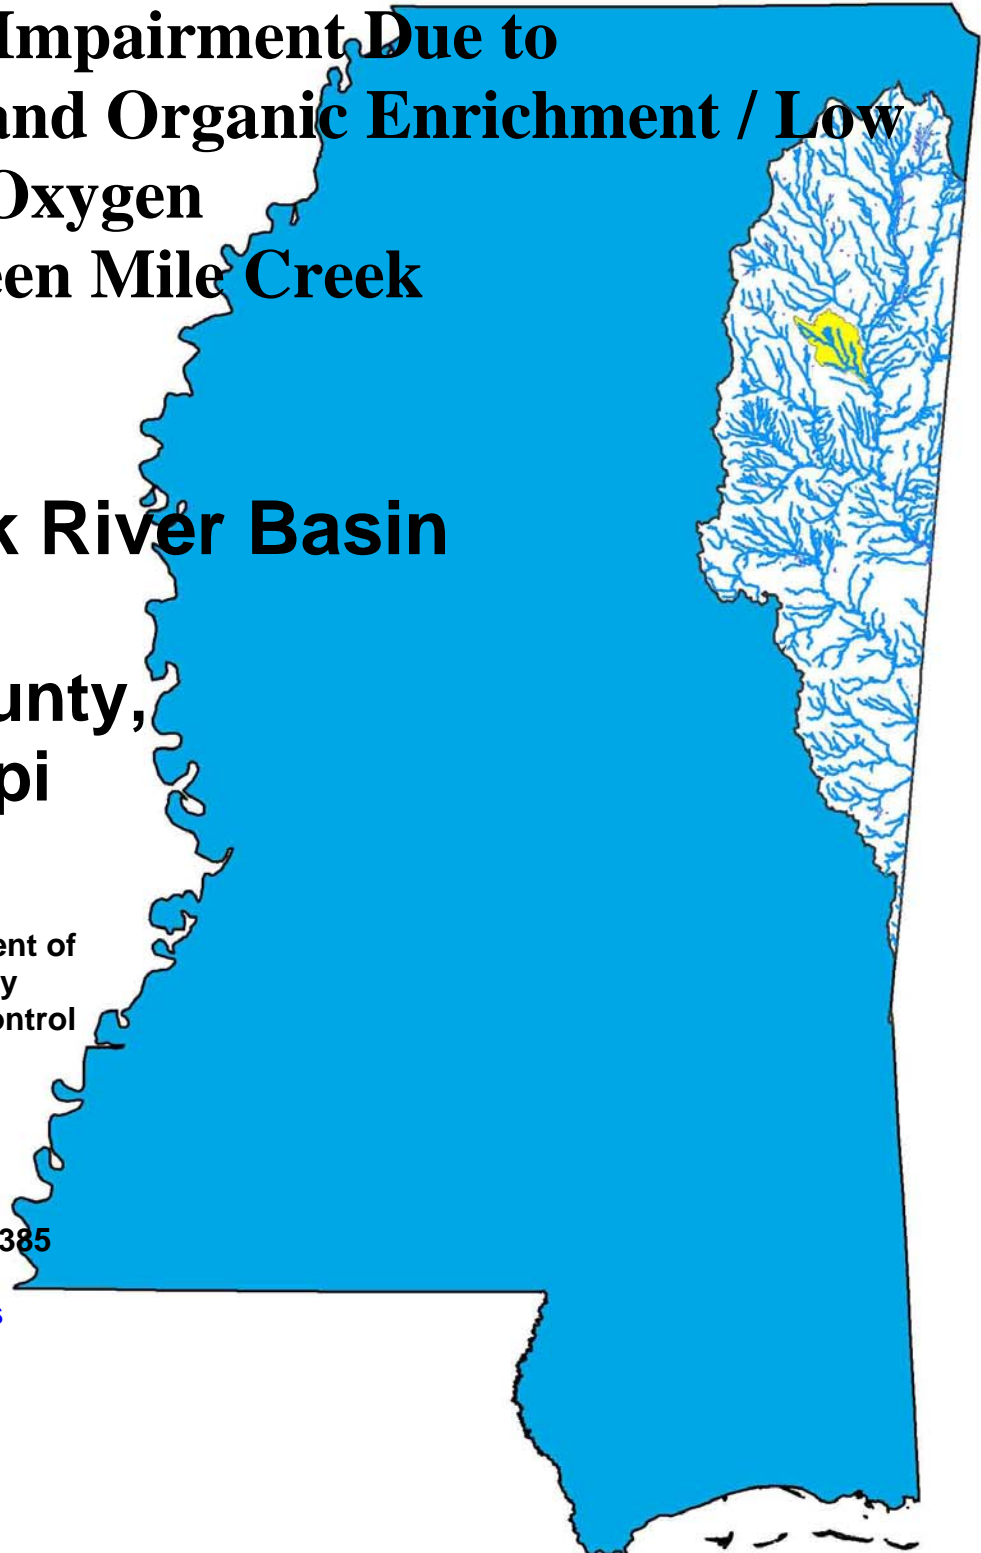

## FOREWORD

This report has been prepared in accordance with the schedule contained within the federal consent decree dated December 22, 1998. The report contains one or more Total Maximum Daily Loads (TMDLs) for water body segments found on Mississippi's 1996 Section 303(d) List of Impaired Water bodies. Because of the accelerated schedule required by the consent decree, many of these TMDLs have been prepared out of sequence with the State's rotating basin approach. The implementation of the TMDLs contained herein will be prioritized within Mississippi's rotating basin approach.

The amount and quality of the data on which this report is based are limited. As additional information becomes available, the TMDLs may be updated. Such additional information may include water quality and quantity data, changes in pollutant loadings, or changes in landuse within the watershed. In some cases, additional water quality data may indicate that no impairment exists.

### Conversion Factors

To convert from	To	Multiply by	To convert from	To	Multiply by
mile <sup>2</sup>	acre	640	acre	ft <sup>2</sup>	43560
km <sup>2</sup>	acre	247.1	days	seconds	86400
m <sup>3</sup>	ft <sup>3</sup>	35.3	meters	feet	3.28
ft <sup>3</sup>	gallons	7.48	ft <sup>3</sup>	gallons	7.48
ft <sup>3</sup>	liters	28.3	hectares	acres	2.47
cfs	gal/min	448.8	miles	meters	1609.3
cfs	MGD	0.646	tonnes	tons	1.1
m <sup>3</sup>	gallons	264.2	µg/l * cfs	gm/day	2.45
m <sup>3</sup>	liters	1000	µg/l * MGD	gm/day	3.79

Fraction	Prefix	Symbol	Multiple	Prefix	Symbol
10 <sup>-1</sup>	deci	d	10	deka	da
10 <sup>-2</sup>	centi	c	10 <sup>2</sup>	hecto	h
10 <sup>-3</sup>	milli	m	10 <sup>3</sup>	kilo	k
10 <sup>-6</sup>	micro	:	10 <sup>6</sup>	mega	M
10 <sup>-9</sup>	nano	n	10 <sup>9</sup>	giga	G
10 <sup>-12</sup>	pico	p	10 <sup>12</sup>	tera	T
10 <sup>-15</sup>	femto	f	10 <sup>15</sup>	peta	P
10 <sup>-18</sup>	atto	a	10 <sup>18</sup>	exa	E

## TABLE OF CONTENTS

TMDL INFORMATION PAGE.....	5
EXECUTIVE SUMMARY .....	6
INTRODUCTION .....	7
1.1 Background.....	7
1.2 Stressor Identification.....	7
1.3 Applicable Water Body Segment Use .....	8
1.4 Applicable Water Body Segment Standard .....	8
1.5 Nutrient Target Development.....	9
WATER BODY ASSESSMENT .....	10
2.1 Fourteen Mile Creek Water Quality Data.....	10
2.2 Assessment of Point Sources .....	11
2.3 Assessment of Non-Point Sources.....	12
2.4 Evaluation of TBODu.....	13
2.5 Estimated Existing Load for Total Nitrogen.....	14
2.6 Estimated Existing Load for Total Phosphorus .....	15
ALLOCATION.....	17
3.1 Wasteload Allocation.....	17
3.2 Load Allocation .....	18
3.3 Incorporation of a Margin of Safety .....	18
3.4 Calculation of the TMDL.....	19
3.5 Seasonality and Critical Condition .....	19
CONCLUSION.....	20
4.1 Public Participation.....	20
REFERENCES .....	21

## FIGURES

Figure 1. Fourteen Mile Creek.....	6
Figure 2. Fourteen Mile Creek §303(d) Segment.....	7
Figure 3. Fourteen Mile Creek Water Quality Monitoring Station .....	10
Figure 4. Fourteen Mile Creek Point Sources.....	11
Figure 5. Landuse in Fourteen Mile Creek Watershed.....	13

## TABLES

Table 1. Listing Information.....	5
Table 2. Water Quality Standards.....	5
Table 3. NPDES Facilities .....	5
Table 4. Total Maximum Daily Load .....	5
Table 5. Fourteen Mile Creek Nutrient Data .....	10
Table 6. NPDES Permitted Facilities Treatment Types .....	11
Table 7. Nutrient Loadings for Various Land Uses.....	12

Table 8. Landuse Distribution for Fourteen Mile Creek Watershed .....	13
Table 9. Point Sources, Maximum Permitted Loads .....	14
Table 10. Estimated Existing Total Nitrogen Load for Fourteen Mile Creek .....	15
Table 11. Median Nitrogen Concentrations in Wastewater Effluents .....	15
Table 12. NPDES Permitted Facilities Treatment Types with Nitrogen Estimates .....	15
Table 13. Estimated Existing Total Phosphorus Load for Fourteen Mile Creek.....	16
Table 14. Median Phosphorous Concentrations in Wastewater Effluents.....	16
Table 15. NPDES Permitted Facilities Treatment Types with Phosphorous Estimates .....	16
Table 16. TBODu Wasteload Allocation.....	17
Table 17. TN Wasteload Allocation .....	17
Table 18. TP Wasteload Allocation .....	17
Table 19. Load Allocation for TBODu.....	18
Table 20. Load Allocation for TN and TP .....	18
Table 21. TMDL for TBODu in Fourteen Mile Creek .....	19
Table 22. TMDL for TN and TP in Fourteen Mile Creek .....	19

## TMDL INFORMATION PAGE

**Table 1. Listing Information**

Name	ID	County	HUC	Cause	Stressors
<b>Fourteen Mile Creek</b>	MS441FE	Hinds	03160101	Biological Impairment	Nutrients and Organic Enrichment / Low Dissolved Oxygen
Location:					

**Table 2. Water Quality Standards**

Parameter	Beneficial use	Water Quality Criteria
<b>Nutrients</b>	Aquatic Life Support	Waters shall be free from materials attributable to municipal, industrial, agricultural, or other dischargers producing color, odor, taste, total suspended solids, or other conditions in such degree as to create a nuisance, render the waters injurious to public health, recreation, or to aquatic life and wildlife, or adversely affect the palatability of fish, aesthetic quality, or impair the waters for any designated uses.
<b>Dissolved Oxygen</b>	Aquatic Life Support	DO concentrations shall be maintained at a daily average of not less than 5.0 mg/l with an instantaneous minimum of not less than 4.0 mg/l

**Table 3. NPDES Facilities**

NPDES ID	Facility Name	Permitted Discharge (MGD)	Receiving Water

**Table 4. Total Maximum Daily Load**

Pollutant	WLA (lbs/day)	LA (lbs/day)	MOS	TMDL (lbs/day)
TN				
TP				
TBOD <sub>u</sub>				

## EXECUTIVE SUMMARY

This TMDL has been developed for Fourteen Mile Creek which was placed on the Mississippi 1996 Section 303(d) List of Impaired Water Bodies due to evaluated causes of pesticides, siltation, nutrients, organic enrichment/low dissolved oxygen, and pathogens. MDEQ completed biological monitoring on Fourteen Mile Creek, which indicated biological impairment. It was determined that nutrients and organic enrichment / low dissolved oxygen are probable primary stressors. This TMDL will provide an estimate of the total nitrogen (TN) and total phosphorus (TP) allowable in the stream and will also provide an allocation for TBODu and nutrients for the two point sources located in the watershed.

Mississippi does not have water quality standards for allowable nutrient concentrations. MDEQ currently has a Nutrient Task Force (NTF) working on the development of criteria for nutrients. An annual concentration range of 0.6 to 0.7 mg/l is an applicable target for TN and 0.06 to 0.10 mg/l for TP for water bodies located in Ecoregion 65. MDEQ is presenting these ranges as preliminary target values for TMDL development which is subject to revision after the development of numeric nutrient criteria.

The Fourteen Mile Creek Watershed is located in HUC 03160101 near Aberdeen. Fourteen Mile Creek flows for 28.7 miles in a southeasterly direction from its headwaters near Okolona to the confluence with the Tennessee-Big Black Waterway in Monroe County.

The critical 7Q10 flow for Fourteen Mile Creek is zero. As a result the permit limits for the two NPDES permitted facilities located in the watershed are either set or recommended to be set at 10-2-6 (BOD<sub>5</sub>, NH<sub>3</sub>-N, DO) based on MDEQ's *Wastewater Regulations for National Pollutant Discharge Elimination System (NPDES) Permits, Underground Injection Control (UIC) Permits, State Permits, Water Quality Based Effluent Limitations and Water Quality Certification*.

The TMDL for organic enrichment was quantified in terms of total ultimate biochemical oxygen demand (TBODu). The limited total nutrient data and estimated ecoregion concentrations indicate reductions of nutrients are needed. This TMDL recommends quarterly nutrient monitoring for both NPDES facilities.



Figure 1. Fourteen Mile Creek

## INTRODUCTION

### 1.1 Background

The identification of water bodies not meeting their designated use and the development of total maximum daily loads (TMDLs) for those water bodies are required by Section 303(d) of the Clean Water Act and the Environmental Protection Agency's (EPA) Water Quality Planning and Management Regulations (40 CFR part 130). The TMDL process is designed to restore and maintain the quality of those impaired water bodies through the establishment of pollutant specific allowable loads. This TMDL has been developed for the 2004 §303(d) listed segment shown in Figure 2.

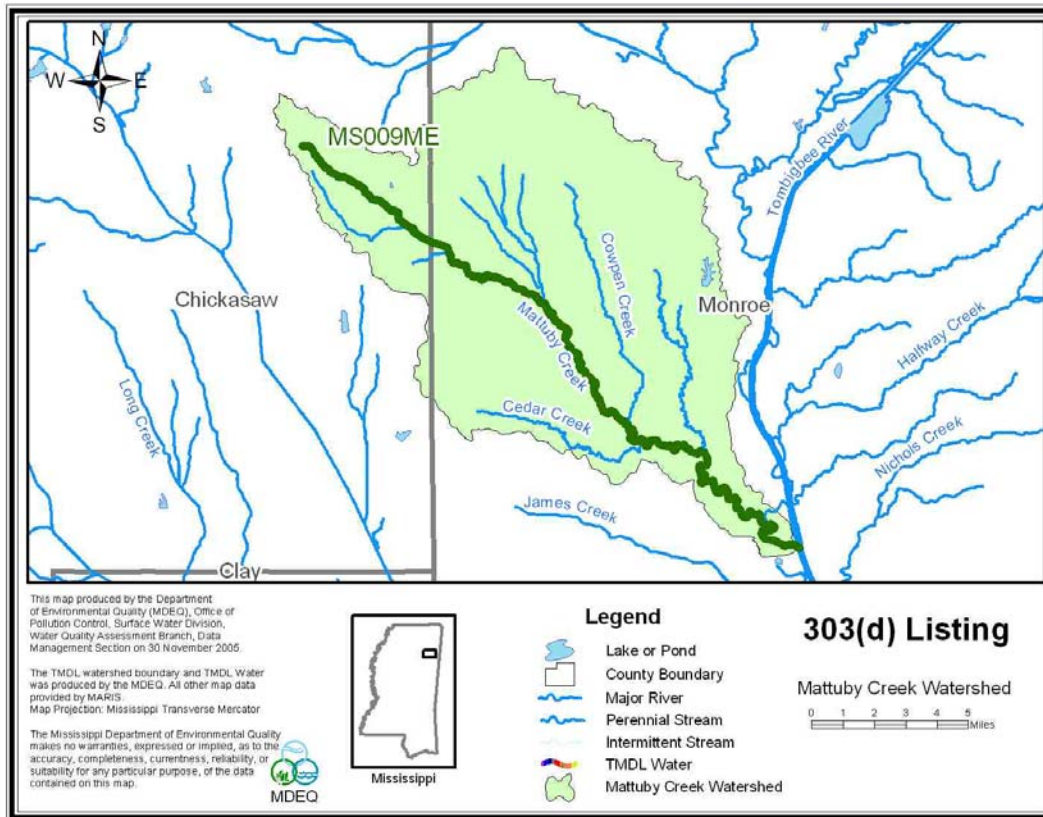


Figure 2. Fourteen Mile Creek §303(d) Segment

The original listing for Fourteen Mile Creek was on the 1996 303(d) list. There were no monitoring data, so the stream remained on the evaluated portion of Mississippi's §303(d) list. MDEQ began a biological monitoring program, the M-BISQ, to monitor this and other evaluated streams to confirm water quality based on the health of the biology in the stream. Fourteen Mile Creek was confirmed as impaired based on the biology.

### 1.2 Stressor Identification

The impaired segment was listed due to failure to meet minimum water quality criteria for aquatic use support based on biological sampling (MDEQ, 2003). Because of these results, a detailed assessment of the watershed and potential pollutant sources, called a stressor

identification report, was developed for each stream. The purpose of the stressor identification process is to identify the stressors and their sources most likely causing degradation of instream biological conditions. The results indicate that nutrients and organic enrichment were probable primary stressors for Fourteen Mile Creek (MDEQ, 2006).

There are no state criteria in Mississippi for nutrients. These criteria are currently being developed by the Mississippi Nutrient Task Force in coordination with EPA Region 4. MDEQ proposed a work plan for nutrient criteria development that has been approved by EPA and is on schedule according to the approved plan in development of nutrient criteria (MDEQ, 2004). Data were collected for wadeable streams to calculate the nutrient criteria.

For this TMDL, MDEQ is presenting preliminary target ranges for TN and TP. The limited data available are greater than these ranges for TN and TP. An annual concentration range of 0.6 to 0.7 mg/l is an applicable target for TN and 0.06 to 0.10 mg/l for TP for water bodies located in Ecoregion 65. However, MDEQ is presenting these ranges as preliminary target values for TMDL development which is subject to revision after the development of nutrient criteria, when the work of the NTF is complete.

### **1.3 Applicable Water Body Segment Use**

The water use classifications are established by the State of Mississippi in the document *State of Mississippi Water Quality Criteria for Intrastate, Interstate, and Coastal Waters* (MDEQ, 2003). The designated beneficial use for the listed segment is fish and wildlife.

### **1.4 Applicable Water Body Segment Standard**

The water quality standard applicable to the use of the water body and the pollutant of concern is defined in the *State of Mississippi Water Quality Criteria for Intrastate, Interstate, and Coastal Waters* (MDEQ, 2003).

The applicable standard specifies that the dissolved oxygen (DO) concentrations shall be maintained at a daily average of not less than 5.0 mg/l with an instantaneous minimum of not less than 4.0 mg/l. Mississippi's current standards contain a narrative criteria that can be applied to nutrients which states "*Waters shall be free from materials attributable to municipal, industrial, agricultural, or other discharges producing color, odor, taste, total suspended or dissolved solids, sediment, turbidity, or other conditions in such degree as to create a nuisance, render the waters injurious to public health, recreation, or to aquatic life and wildlife, or adversely affect the palatability of fish, aesthetic quality, or impair the waters for any designated use* (MDEQ, 2002)." In the 1999 Protocol for Developing Nutrient TMDLs, EPA suggests several methods for the development of numeric criteria for nutrients (USEPA, 1999). In accordance with the 1999 Protocol, "The target value for the chosen indicator can be based on: comparison to similar but unimpaired waters; user surveys; empirical data summarized in classification systems; literature values; or professional judgment." MDEQ believes the most economical and scientifically defensible method for use in Mississippi is a comparison between similar but unimpaired waters within the same region. This method is dependent on adequate data which are being collected in accordance with the EPA approved plan. The initial phase of the data collection process for wadeable streams is complete.



## **1.5 Nutrient Target Development**

Nutrient data were collected quarterly at 99 discrete sampling stations state wide where biological data already existed. These stations were identified and used to represent a range of stream reaches according to biological health status, geographic location (selected to account for ecoregion, bioregion, basin and geologic variability) and streams that potentially receive non-point source pollution from urban, agricultural, and silviculture lands as well as point source pollution from NPDES permitted facilities.

Nutrient concentration data were not normally distributed; therefore, data were log transformed for statistical analyses. Data were evaluated for distinct patterns of various data groupings (stratification) according to natural variability. Only stations that were characterized as “least disturbed” through a defined process in the M-BISQ process (M-BISQ 2003) or stations that resulted in a biological impairment rating of “fully attaining” were used to evaluate natural variability of the data set. Each of these two groups was evaluated separately (“least disturbed sites” and “fully attaining sites”). Some stations were used in both sets, in other words, they were considered “least disturbed” and “fully attaining”. The number of stations considered “least disturbed” was 30 of 99, and the number of stations considered “fully attaining” was 53 of 99.

Several analysis techniques were used to evaluate nutrient data. Graphical analyses were used as the primary evaluation tool. Specific analyses used included; scatter plots, box plots, Pearson’s correlation, and general descriptive statistics.

In general, natural nutrient variability was not apparent based on box plot analyses according to the 4 stratification scenarios. Bioregions were selected as the stratification scheme to use for TMDLs in the Pascagoula Basin. However, this was not appropriate for some water bodies in smaller bioregions. Therefore, MDEQ now uses ecoregions as a stratification scheme for the water bodies in the remainder of the state.

In order to use the data set to determine possible nutrient thresholds, nutrient concentrations were evaluated as to their correlation with biological metrics. That thorough evaluation was completed prior to the Pascagoula River Basin TMDLs. The methodology and approach were verified. The same methodology was applied to the subsequent bioregions and ecoregions.

For the preliminary target concentration range per each ecoregion, the 75th and 90th percentiles were derived for station mean values of nutrient sites found to be fully supporting of aquatic life support according to the M-BISQ scores. For the estimate of the existing concentrations the 50th percentile (median) was derived for station mean values of sites that were not attaining and had nutrient concentrations greater than the target.


## WATER BODY ASSESSMENT

### 2.1 Fourteen Mile Creek Water Quality Data

Nutrient data for the Fourteen Mile Creek Watershed were gathered and reviewed. The data are given in Table 5. Data exist for the §303(d)-listed segment of Fourteen Mile Creek based on samples collected during the §303(d)/M-BISQ monitoring project at site #151 and data collected as part of MDEQ’s ambient monitoring program. The location of the MBISQ Station is shown in Figure 3. Ambient station TB055 is at the same location as MBISQ Station #151.

**Table 5. Fourteen Mile Creek Nutrient Data**

Station	Date	Time	TN (mg/l)	TP (mg/l)

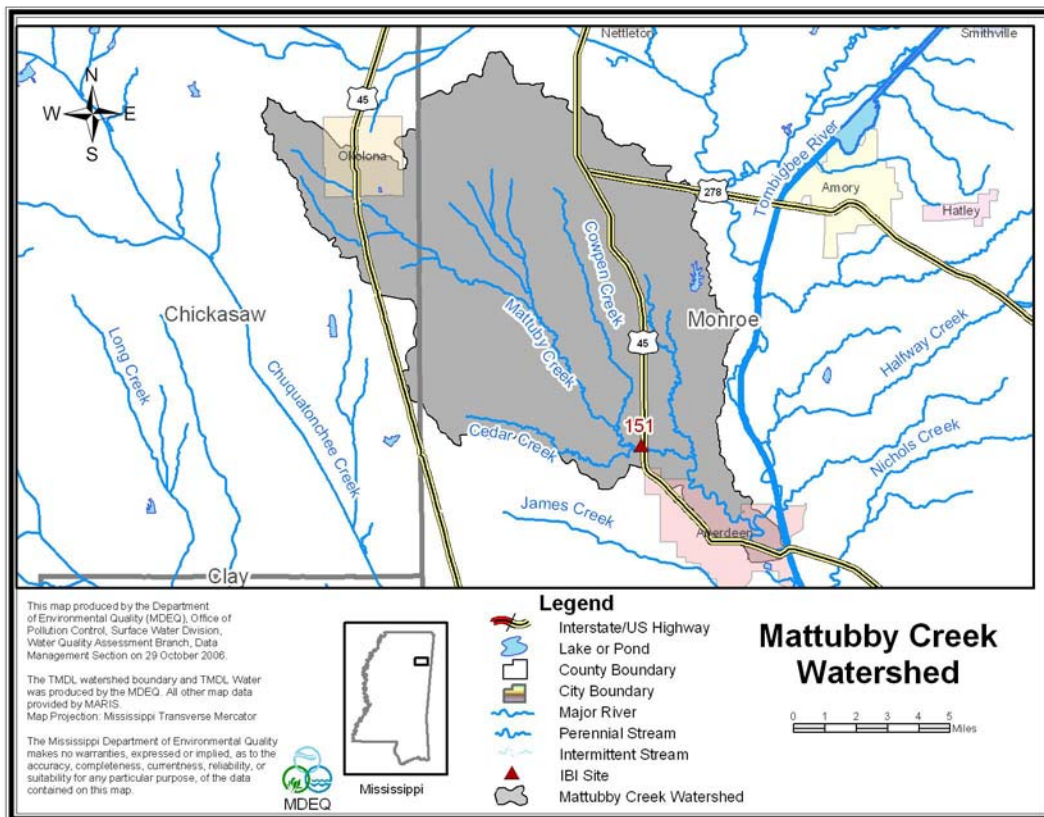

**Figure 3. Fourteen Mile Creek Water Quality Monitoring Station**


## 2.2 Assessment of Point Sources

An important step in assessing pollutant sources in the Fourteen Mile Creek watershed is locating the NPDES permitted sources. There are 2 facilities permitted to discharge into the Fourteen Mile Creek watershed, Table 6. The locations of the facilities are shown in Figure 4. One of the facilities, Okolona POTW, South will require changes to their existing NPDES permit to include a limit for ammonia nitrogen (NH<sub>3</sub>-N), in accordance with MDEQ's *Wastewater Regulations for National Pollutant Discharge Elimination System (NPDES) Permits, Underground Injection Control (UIC) Permits, State Permits, Water Quality Based Effluent Limitations and Water Quality Certification..*

**Table 6. NPDES Permitted Facilities Treatment Types**

Name	NPDES Permit	Treatment Type	Discharge (MGD)	BOD <sub>5</sub> (mg/l)	NH <sub>3</sub> -N mg/L
Monroe County Board of Supervisors, Wren Industrial Park Sewer System	MS0058122	Conventional Lagoon w/ constructed wetlands	0.015	10	2
Okolona POTW, South	MS0025631	Conventional Lagoon w/ sand filter	0.66	10	2*

\*Proposed Permit Limit

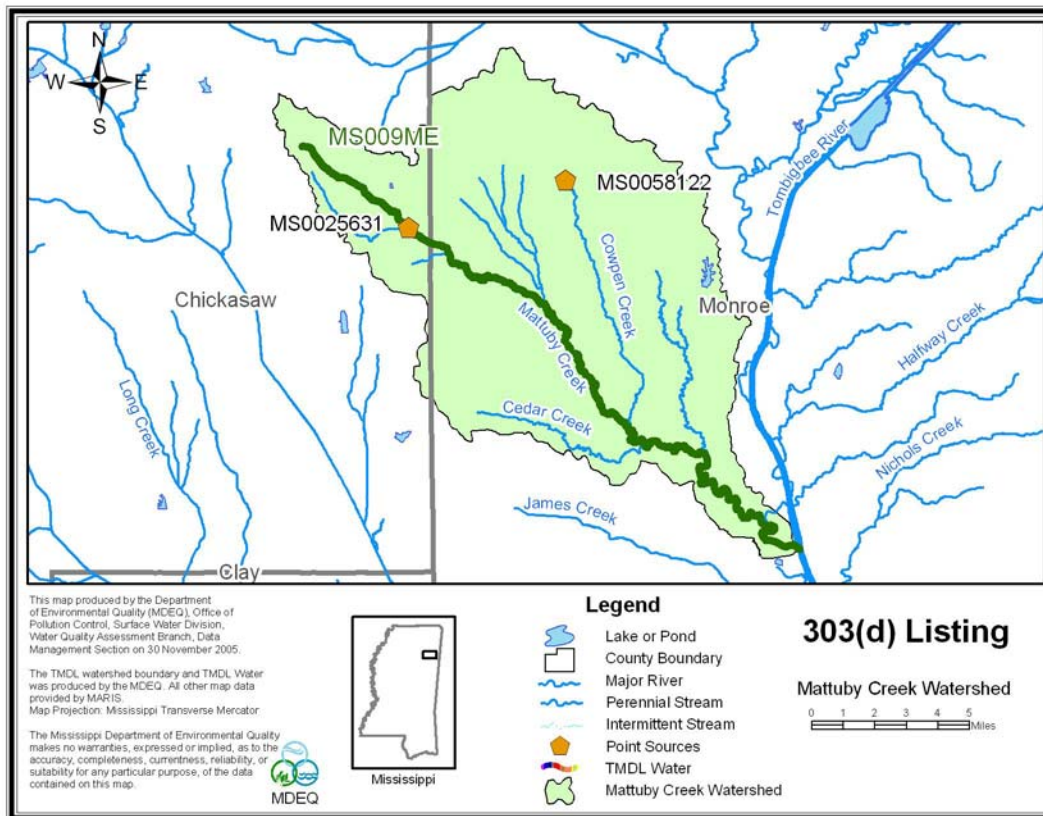

**Figure 4. Fourteen Mile Creek Point Sources**

## 2.3 Assessment of Non-Point Sources

Non-point loading of nutrients and organic material in a water body results from the transport of the pollutants into receiving waters by overland surface runoff, groundwater infiltration, and atmospheric deposition. The two primary nutrients of concern are nitrogen and phosphorus. Total nitrogen is a combination of many forms of nitrogen found in the environment. Inorganic nitrogen can be transported in particulate and dissolved phases in surface runoff. Dissolved inorganic nitrogen can be transported in groundwater and may enter a stream from groundwater infiltration. Finally, atmospheric gaseous nitrogen may enter a stream from atmospheric deposition.

Unlike nitrogen, phosphorus is primarily transported in surface runoff when it has been sorbed by eroding sediment. Phosphorus may also be associated with fine-grained particulate matter in the atmosphere and can enter streams as a result of dry fallout and rainfall (USEPA, 1999). However, phosphorus is typically not readily available from the atmosphere or the natural water supply (Davis and Cornwell, 1988). As a result, phosphorus is typically the limiting nutrient in most non-point source dominated rivers and streams, with the exception of watersheds which are dominated by agriculture and have high concentrations of phosphorus contained in the surface runoff due to fertilizers and animal excrement or watersheds with naturally occurring soils which are rich in phosphorus (Thomann and Mueller, 1987).

Watersheds with a large number of failing septic tanks may also deliver significant loadings of phosphorus to a stream. All domestic wastewater contains phosphorus which comes from humans and the use of phosphate containing detergents. Table 7 presents typical nutrient loading ranges for various land uses.

**Table 7. Nutrient Loadings for Various Land Uses**


Landuse	Total Phosphorus [lb/acre-y]			Total Nitrogen [lb/acre-y]		
	Minimum	Maximum	Median	Minimum	Maximum	Median
Roadway	0.53	1.34	0.98	1.2	3.1	2.1
Commercial	0.61	0.81	0.71	1.4	7.8	4.6
Single Family-Low Density	0.41	0.57	0.49	2.9	4.2	3.6
Single Family-High Density	0.48	0.68	0.58	3.6	5.0	5.2
Multifamily Residential	0.53	0.72	0.62	4.2	5.9	5.0
Forest	0.09	0.12	0.10	1.0	2.5	1.8
Grass	0.01	0.22	0.12	1.1	6.3	3.7
Pasture	0.01	0.22	0.12	1.1	6.3	3.7

Source: Horner et al., 1994 in Protocol for Developing Nutrient TMDLs (USEPA 1999)

The drainage area of Fourteen Mile Creek is approximately 124.4 square miles. The watershed contains many different landuse types, including urban, forest, cropland, pasture, water, and wetlands. The land use information for the watershed is based on the State of Mississippi's Automated Resource Information System (MARIS), 1997. This data set is based Landsat Thematic Mapper digital images taken between 1992 and 1993. The MARIS data are classified on a modified Anderson level one and two system with additional level two wetland classifications. The land use categories were grouped into the land uses of urban, forest, cropland, pasture, disturbed, wetlands, and water. The area directly surrounding the impaired segment, MS441FE, is predominantly cropland and pasture. The landuse distribution for Fourteen Mile Creek is shown in Table 8 and Figure 5.

**Table 8. Landuse Distribution for Fourteen Mile Creek Watershed**

In Acres	Urban	Forest	Cropland	Pasture	Scrub/Barren	Water	Wetlands
Fourteen Mile	1,532	13,938	17,853	32,312	13,504	330	139
Percentage	1.9	17.5	22.4	40.6	17.0	0.4	0.2

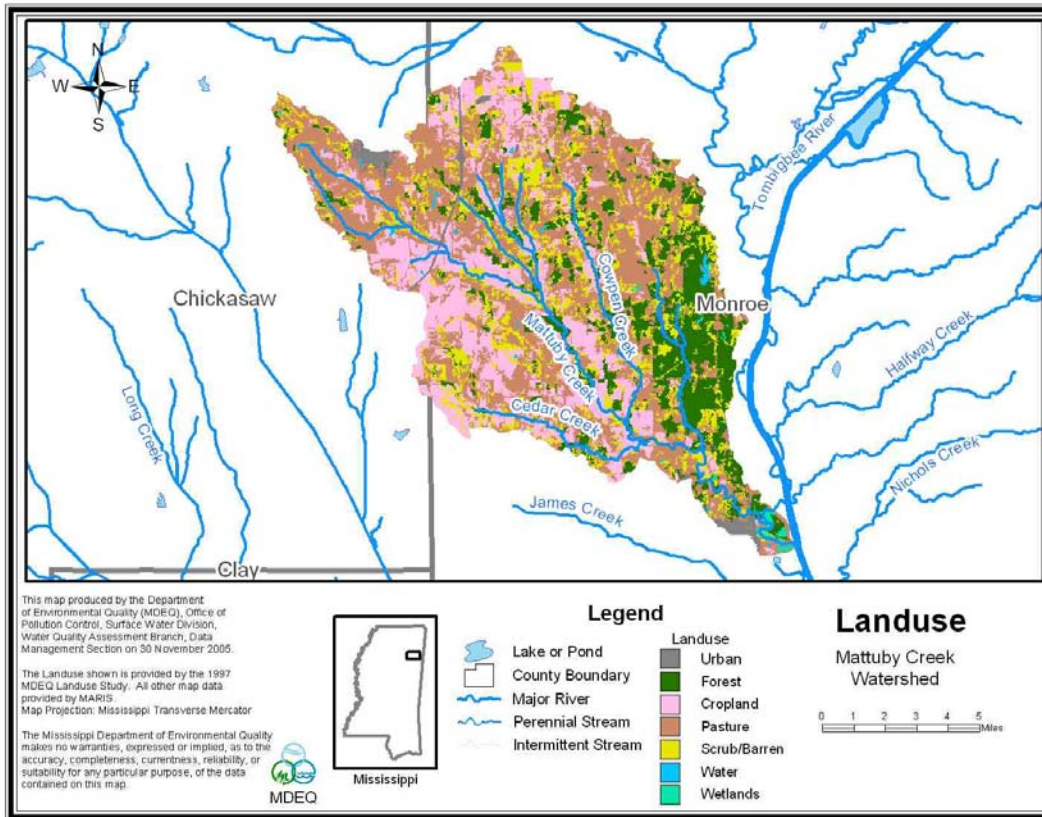

**Figure 5. Landuse in Fourteen Mile Creek Watershed**

## 2.4 Evaluation of TBODu

The TMDL for DO will be quantified in terms of organic enrichment. Organic enrichment is measured in terms of total ultimate biochemical oxygen demand (TBODu). TBODu represents the oxygen consumed by microorganisms while stabilizing or degrading carbonaceous and nitrogenous compounds under aerobic conditions over an extended time period. The carbonaceous compounds are referred to as CBODu, and the nitrogenous compounds are referred to as NBODu. TBODu is equal to the sum of NBODu and CBODu, Equation 1.

$$\text{TBODu} = \text{CBODu} + \text{NBODu} \quad \text{(Equation 1)}$$

Organic material discharged to a stream from an NPDES permitted point source is typically quantified as 5-day biochemical oxygen demand (BOD<sub>5</sub>). BOD<sub>5</sub> is a measure of the oxidation of carbonaceous and nitrogenous material over a 5-day incubation period. However, oxidation of nitrogenous material, called nitrification, usually does not take place within the 5-day period because the bacteria that are responsible for nitrification are normally not present in large

numbers and have slow reproduction rates (Metcalf and Eddy, 1991). Thus, BOD<sub>5</sub> is generally considered equal to CBOD<sub>5</sub>. Because permits for point source facilities are written in terms of BOD<sub>5</sub> while TMDLs are typically developed using CBOD<sub>u</sub>, a ratio between the two terms is needed, Equation 2.

$$\text{CBOD}_u = \text{CBOD}_5 * \text{Ratio} \quad \text{(Equation 2)}$$

The CBOD<sub>u</sub> to CBOD<sub>5</sub> ratios are given in *Empirical Stream Model Assumptions for Conventional Pollutants and Conventional Water Quality Models* (MDEQ, 2001). These values are recommended for use by MDEQ regulations when actual field data are not available. A CBOD<sub>u</sub> to CBOD<sub>5</sub> ratio of 1.5 is appropriate for both of the facilities located in the Fourteen Mile Creek watershed.

In order to determine the NBOD<sub>u</sub>, the ammonia nitrogen (NH<sub>3</sub>-N) loads were converted to an oxygen demand using a factor of 4.57 pounds of oxygen per pound of ammonia nitrogen (NH<sub>3</sub>-N) oxidized to nitrate nitrogen (NO<sub>3</sub>-N). Using this factor is a conservative modeling assumption because it assumes that all of the ammonia is converted to nitrate through nitrification. The sum of CBOD<sub>u</sub> and NBOD<sub>u</sub> is equal to the point source load of TBOD<sub>u</sub>. For facilities that do not have a permit limit for NH<sub>3</sub>-N, an assumed value of 2.0 mg/L was used to calculate the NBOD<sub>u</sub> load for this facility. The maximum permitted load of TBOD<sub>u</sub> from the existing point source is given in Table 9.

**Table 9. Point Sources, Maximum Permitted Loads**

Facility Name	Flow (MGD)	CBOD <sub>5</sub> (mg/l)	NH <sub>3</sub> -N (mg/L)	CBOD <sub>u</sub> : CBOD <sub>5</sub> Ratio	CBOD <sub>u</sub> (lbs/day)	NBOD <sub>u</sub> (lbs/day)	TBOD <sub>u</sub> (lbs/day)
Monroe County Board of Supervisors, Wren Industrial Park Sewer System	0.015	10	2	1.5	1.88	1.14	3.02
Okolona POTW, South	0.66	10	2*	1.5	82.57	50.31	132.88

\* Proposed Permit Limit

## 2.5 Estimated Existing Load for Total Nitrogen

The estimated existing total nitrogen concentration is based on the median total nitrogen concentrations measured in wadeable streams in Ecoregion 65 with impaired biology and elevated nutrients, which is 1.38 mg/l. The target concentration for TN for Ecoregion 65 is 0.6 to 0.7 mg/l. The average concentration found in this stream is 1.41 mg/L.

To convert the estimated existing total nitrogen concentration to a total nitrogen load, the average annual flow was estimated based on flow data from the USGS gage located on the Chuquatonchee Creek near West Point, Mississippi (02440500). The average annual flow for this gage is 797 cfs. To estimate the amount of flow in Fourteen Mile Creek, a drainage area ratio was calculated (797 cfs/505 square miles = 1.58 cfs/square miles). The ratio was then multiplied by the drainage area of the impaired segment. The existing TN load was then calculated using Equation 1.

$$\text{Nutrient Load (lb/day)} = \text{Flow (cfs)} * 5.394 \text{ (conversion factor)} * \text{Nutrient Concentration (mg/L)} \quad \text{(Equation 3)}$$

**Table 10. Estimated Existing Total Nitrogen Load for Fourteen Mile Creek**

Stream	Area (sq miles)	Average Annual Flow (cfs)	TN (mg/l)	TN (lbs/day)
Fourteen Mile Creek	124.4	196.6	1.38	1463.4

The existing TN load consists of both point and non-point components. Since many treatment facilities in Mississippi do not have permit limits for nitrogen, nor are they currently required to report effluent nitrogen concentrations, MDEQ used an estimated effluent concentration based on literature values for different treatment types. Table 11 shows the median effluent nitrogen concentrations for four conventional treatment processes. The appropriate concentration for each of the facilities was then used in Equation 3 to estimate the TN load from point sources, Table 12.

**Table 11. Median Nitrogen Concentrations in Wastewater Effluents**

	Treatment Type			
	Primary	Trickling Filter	Activated Sludge	Stabilization Pond
No. of plants sampled	55	244	244	149
Total N (mg/L)	22.4 ± 1.30	16.4 ± 0.54	13.6 ± 0.62	11.5 ± 0.84

Source: After Ketchum, 1982 in EPA 823-B-97-002 (USEPA, 1997)

**Table 12. NPDES Permitted Facilities Treatment Types with Nitrogen Estimates**

Facility Name	Treatment Type	Permitted Discharge (MGD)	TN concentration estimate (mg/l)	TN Load estimate (lbs/day)
Monroe County Board of Supervisors, Wren Industrial Park Sewer System	Conventional Lagoon w/ constructed wetlands	0.015	11.5	1.4
Okolona POTW, South	Conventional Lagoon w/ sand filter	0.66	11.5	63.3

The average TN point source load is estimated to be 64.7 lbs/day. The annual average total load based on the estimated TN concentration of 1.38 mg/L and an annual average flow of 196.6 cfs is 1,463.4 lbs/day. The point source load is 4.4% of the total load. Therefore, 95.6% of the estimated TN load is from non-point sources.

## 2.6 Estimated Existing Load for Total Phosphorus

The estimated existing total phosphorous concentration is based on the median total phosphorous concentrations measured in wadeable streams in Ecoregion 65 with impaired biology and elevated nutrients, which is 0.18 mg/l. The target concentration for TP for Ecoregion 65 is 0.06 to 0.10 mg/l. The average concentration found in this stream is 0.11mg/L.

To convert the estimated existing total phosphorous concentration to a total phosphorous load, the average annual flow was estimated based on flow data as shown above. The existing TP load was then calculated using Equation 3.

**Table 13. Estimated Existing Total Phosphorus Load for Fourteen Mile Creek**

Stream		Area (sq miles)	Average Annual Flow (cfs)	TP (mg/l)	TP (lbs/day)
Fourteen Creek	Mile	124.4	196.6	0.18	190.9

The existing TP load consists of both point and non-point components. Since many treatment facilities in Mississippi do not have permit limits for phosphorous, nor are they currently required to report effluent phosphorous concentrations, MDEQ used an estimated effluent concentration based on literature values for different treatment types. Table 14 shows the median effluent phosphorous concentrations for four conventional treatment processes. The appropriate concentration for each of the facilities was then used in Equation 3 to estimate the TP load from point sources, Table 15.

**Table 14. Median Phosphorous Concentrations in Wastewater Effluents**

	Treatment Type			
	Primary	Trickling Filter	Activated Sludge	Stabilization Pond
No. of plants sampled	55	244	244	149
Total P (mg/L)	6.6 ± 0.66	6.9 ± 0.28	5.8 ± 0.29	5.2 ± 0.45

Source: After Ketchum, 1982 in EPA 823-B-97-002 (USEPA, 1997)

**Table 15. NPDES Permitted Facilities Treatment Types with Phosphorous Estimates**

Facility Name	Treatment Type	Permitted Discharge (MGD)	TP concentration estimate (mg/l)	TP Load estimate (lbs/day)
Monroe County Board of Supervisors, Wren Industrial Park Sewer System	Conventional Lagoon w/ constructed wetlands	0.015	5.2	0.7
Okolona POTW, South	Conventional Lagoon w/ sand filter	0.66	5.2	28.6

The average TP point source load is estimated to be 29.3 lbs/day. The annual average total load based on the estimated total phosphorous concentration of 0.18 mg/L and an annual average flow of 196.6 cfs is 190.9 lbs/day. The point source load is 15.3% of the total load. Therefore, 84.7% of the estimated existing total load is from non-point sources.



## ALLOCATION

The allocation for this TMDL involves a wasteload allocation for point sources and a load allocation for non-point sources necessary for attainment of water quality standards in the Fourteen Mile Creek. The nutrient portion of this TMDL is addressed through initial estimates of the existing and target TN and TP concentrations.

### 3.1 Wasteload Allocation

There are 2 point sources in the Fourteen Mile Creek watershed. The critical 7Q10 flow for Fourteen Mile Creek is zero. As a result the permit limits for any NPDES permitted facilities located in the watershed should be set at 10-2-6 (BOD<sub>5</sub>, NH<sub>3</sub>-N, DO) based on MDEQ's *Wastewater Regulations for National Pollutant Discharge Elimination System (NPDES) Permits, Underground Injection Control (UIC) Permits, State Permits, Water Quality Based Effluent Limitations and Water Quality Certification*. Wren Industrial Park Sewer System currently has limits of 10-2-6. Okolona POTW, South has permit limits of 10 BOD<sub>5</sub> and 6 DO with no permit limit for ammonia nitrogen (NH<sub>3</sub>-N). Therefore, this TMDL recommends the permit limits for Okolona POTW, South include a limit of 2 mg/L for NH<sub>3</sub>-N.

The NPDES permitted facilities included in the wasteload allocation for Fourteen Mile Creek are given in Tables 16-18. Table 16 gives the wasteload allocation for TBOD<sub>u</sub>. Table 17 gives the estimated load of TN from the point sources which are 4.4% of the total existing load as described in Section 2.5. Table 18 gives the estimated load of TP from the point sources which are 15.3% of the total existing load as described in Section 2.6.

**Table 16. TBOD<sub>u</sub> Wasteload Allocation**

Facility Name	CBOD <sub>u</sub> (lbs/day)	NBOD <sub>u</sub> (lbs/day)	TBOD <sub>u</sub> (lbs/day)
Monroe County Board of Supervisors, Wren Industrial Park Sewer System	1.88	1.14	3.02
Okolona POTW, South	82.57	50.31	132.88
	<b>84.45</b>	<b>51.45</b>	<b>135.90</b>

**Table 17. TN Wasteload Allocation**

Facility Name	TN concentration estimate (mg/l)	Permitted Discharge (MGD)	TN Load estimate (lbs/day)	TN Load allocated (lbs/day)	Percent Reduction
Monroe County Board of Supervisors, Wren Industrial Park Sewer System	11.5	0.015	1.4	1.4	0
Okolona POTW, South	11.5	0.66	63.3	63.3	0
<b>Total</b>		<b>0.675</b>	<b>64.7</b>	<b>64.7</b>	<b>0</b>

**Table 18. TP Wasteload Allocation**

Facility Name	TP concentration estimate (mg/l)	Permitted Discharge (MGD)	TP Load estimate (lbs/day)	TP Load allocated (lbs/day)	Percent Reduction
Monroe County Board of Supervisors, Wren Industrial Park Sewer System	5.2	0.015	0.7	0.7	0
Okolona POTW, South	5.2	0.66	28.6	28.6	0

<b>Total</b>		<b>0.675</b>	<b>29.3</b>	<b>29.3</b>	<b>0</b>
--------------	--	--------------	-------------	-------------	----------

It is noted that due to the lack of nutrient water quality criteria these TMDL allocations are estimates based on literature assumptions and projected targets. The State of Mississippi is in the process of developing numeric nutrient criteria in accordance with an EPA approved work plan for nutrient criteria development. This TMDL recommends quarterly monitoring of nutrients for the NPDES facilities. MDEQ’s calculations of the annual average load indicate that the majority of the estimated nutrient load is from non-point sources. Therefore, the State will focus on striving to attain the goal set by the LA portion of the TMDL.

### 3.2 Load Allocation

The non-point source load for TBODu in Fourteen Mile Creek is given in Table 19. The load allocation for the TBODu TMDL is has been set to zero because there are no non-point source flows entering the water body at the critical 7Q10 condition which is used for DO modeling.

Based on initial estimates in Sections 2.5 and 2.6, most of the TN and TP loads in this watershed come from non-point sources. Therefore, best management practices (BMPs) should be encouraged in the watershed to reduce potential nutrient loads from non-point sources. The watershed should be considered a priority for riparian buffer zone restoration and any nutrient reduction BMPs. For land disturbing activities related to silviculture, construction, and agriculture, it is recommended that practices, as outlined in “Mississippi’s BMPs: Best Management Practices for Forestry in Mississippi” (MFC, 2000), “Planning and Design Manual for the Control of Erosion, Sediment, and Stormwater” (MDEQ, et. al, 1994), and “Field Office Technical Guide” (NRCS, 2000), be followed, respectively. Table 20 shows the load allocation for TN and TP.

**Table 19. Load Allocation for TBODu**

<b>Water Body</b>	<b>CBODu (lbs/day)</b>	<b>NBODu (lbs/day)</b>	<b>TBODu (lbs/day)</b>
Fourteen Mile Creek	0	0	0

**Table 20. Load Allocation for TN and TP**

<b>Nutrient</b>	<b>Estimated Nutrient Non-point Source Load (lbs/day)</b>	<b>Allocated Nutrient Non-point Source Load (lbs/day)</b>
TN	571.6 – 677.6	571.6 – 677.6
TP	34.3 – 76.7	34.3 – 76.7

### 3.3 Incorporation of a Margin of Safety

The margin of safety is a required component of a TMDL and accounts for the uncertainty about the relationship between pollutant loads and the quality of the receiving water body. The two types of MOS development are to implicitly incorporate the MOS using conservative model assumptions or to explicitly specify a portion of the total TMDL as the MOS. The MOS selected for this TMDL is implicit.

### 3.4 Calculation of the TMDL

The TMDLs were calculated based on Equation 4.

$$\text{TMDL} = \text{WLA} + \text{LA} + \text{MOS} \quad (\text{Equation 4})$$

In this equation, WLA is the wasteload allocation, LA is the load allocation, and MOS is the margin of safety. A predictive model was not used to calculate the dissolved oxygen TMDL due to the 7Q10 flow being zero. The LA for TBODu has been set to zero because there are no non-point source flows entering the water body at the critical 7Q10 condition. Equation 3 was used to calculate the TMDL for TN and TP. The target concentration was used with the average flow for the watershed to determine the TMDL. The TMDL was then compared to the estimated existing load previously calculated. The estimated existing total nitrogen concentration indicates needed reductions of 49% to 57%. The TMDL for TN is 636.3 – 742.3 lbs/day. The estimated existing total phosphorous concentration indicates needed reductions of 44% to 67%. The TMDL for TP is 63.6 – 106.0 lbs/day.

**Table 21. TMDL for TBODu in Fourteen Mile Creek**

	<b>WLA (lbs/day)</b>	<b>LA (lbs/day)</b>	<b>MOS (lbs/day)</b>	<b>TMDL (lbs/day)</b>
<b>CBODu</b>	84.45	0	Implicit	84.45
<b>NBODu</b>	51.45	0	Implicit	51.45
<b>TBODu</b>	<b>135.90</b>	<b>0</b>		<b>135.90</b>

**Table 22. TMDL for TN and TP in Fourteen Mile Creek**

	<b>WLA (lbs/day)</b>	<b>LA (lbs/day)</b>	<b>MOS (lbs/day)</b>	<b>TMDL (lbs/day)</b>
<b>TN</b>	64.7	571.6 – 677.6	Implicit	636.3 – 742.3
<b>TP</b>	29.3	34.3 – 76.7	Implicit	63.6 – 106.0

### 3.5 Seasonality and Critical Condition

This TMDL accounts for seasonal variability by requiring allocations that ensure year-round protection of water quality standards, including during critical conditions.

## **CONCLUSION**

Nutrients were addressed through an estimate of a preliminary total phosphorous concentration target range and a preliminary total nitrogen concentration target range. Based on the estimated existing and target total nitrogen concentrations, this TMDL recommends a 49% - 57% reduction of the nitrogen loads entering this stream to meet the preliminary target range of 0.6 to 0.7 mg/l. Based on the estimated existing and target total phosphorous concentrations, this TMDL recommends a 44% - 67% reduction of the phosphorous loads entering this stream to meet the preliminary target range of 0.06 to 0.10 mg/l. Because only 4.4% of the existing TN load and 15.3% of the TP load are estimated to be due to point sources, this TMDL does not recommend percent reductions from the NPDES permits. However, this TMDL recommends quarterly monitoring of nutrients for the two NPDES facilities. One of the facilities, Okolona POTW, South will also require changes to their existing NPDES permit to include limits for ammonia nitrogen (NH<sub>3</sub>-N).

It is recommended that the Fourteen Mile Creek watershed be considered as a priority watershed for riparian buffer zone restoration and any nutrient reduction BMPs. The implementation of these BMP activities should reduce the nutrient load entering the creek. This will provide improved water quality for the support of aquatic life in the water bodies and will result in the attainment of the applicable water quality standards.

### **4.1 Public Participation**

This TMDL will be published for a 30-day public notice. During this time, the public will be notified by publication in the statewide newspaper. The public will be given an opportunity to review the TMDLs and submit comments. MDEQ also distributes all TMDLs at the beginning of the public notice to those members of the public who have requested to be included on a TMDL mailing list. Anyone wishing to become a member of the TMDL mailing list should contact Greg Jackson at [Greg\\_Jackson@deq.state.ms.us](mailto:Greg_Jackson@deq.state.ms.us).

All comments should be directed to Greg Jackson at [Greg\\_Jackson@deq.state.ms.us](mailto:Greg_Jackson@deq.state.ms.us) or Greg Jackson, MDEQ, PO Box 10385, Jackson, MS 39289. All comments received during the public notice period and at any public hearings become a part of the record of this TMDL and will be considered in the submission of this TMDL to EPA Region 4 for final approval.

## REFERENCES

- MDEQ. 2006. *Stressor Identification Report for Fourteen Mile Creek*. Office of Pollution Control.
- MDEQ. 2004. *Mississippi's Plan for Nutrient Criteria Development*. Office of Pollution Control.
- MDEQ. 2003. Development and Application of the Mississippi Benthic Index of Stream Quality (M-BISQ). June 30, 2003. Prepared by Tetra Tech, Inc., Owings Mills, MD, for the Mississippi Department of Environmental Quality, Office of Pollution Control, Jackson, MS. (*For further information on this document, contact Randy Reed [601-961-5158]*).
- MDEQ. 2003. *State of Mississippi Water Quality Criteria for Intrastate, Interstate, and Coastal Waters*. Office of Pollution Control.
- MDEQ. 2001. *Wastewater Regulations for National Pollutant Discharge Elimination System (NPDES) Permits, Underground Injection Control (UIC) Permits, State Permits, Water Quality Based Effluent Limitations and Water Quality Certification*. Office of Pollution Control.
- USEPA. 2000. *Stressor Identification Guidance Document*. EPA/822/B-00/025. Office of Water, Washington, DC.
- USEPA. 1999. *Protocol for Developing Nutrient TMDLs*. EPA 841-B-99-007. Office of Water (4503F), United States Environmental Protection Agency, Washington D.C. 135 pp.
- Davis and Cornwell. 1998. *Introduction to Environmental Engineering*. McGraw-Hill.
- USEPA. 1997. *Technical Guidance Manual for Developing Total Maximum Daily Loads, Book 2: Streams and Rivers, Part 1: Biochemical Oxygen Demand/Dissolved Oxygen and Nutrients/Eutrophication*. United States Environmental Protection Agency, Office of Water, Washington, D.C. EPA 823-B-97-002.
- Telis, Pamela A. 1992. *Techniques for Estimating 7-Day, 10-Year Low Flow Characteristics for Ungaged Sites on Streams in Mississippi*. U.S. Geological Survey, Water Resources Investigations Report 91-4130.
- Metcalf and Eddy, Inc. 1991. *Wastewater Engineering: Treatment, Disposal, and Reuse 3<sup>rd</sup> ed.* New York: McGraw-Hill.
- Thomann and Mueller. 1987. *Principles of Surface Water Quality Modeling and Control*. New York: Harper Collins.