


Fecal Coliform TMDL For The Tchoutacabouffa River Coastal River Basin Harrison, Jackson, and Stone Counties, Mississippi

Prepared by
Mississippi Department of Environmental Quality
Office of Pollution Control
TMDL/WLA Section of the Water Quality Assessment Branch

December 15, 1999
MDEQ
P.O. Box 10385
Jackson, MS 39289-0385
(601) 961-5171

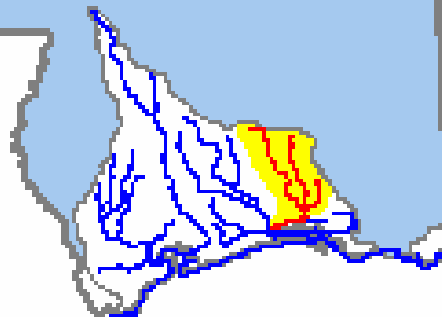

CONTENTS

	<u>Page</u>
MONITORED SEGMENT IDENTIFICATION.....	iv
EXECUTIVE SUMMARY	v
1.0 INTRODUCTION	1-1
1.1 Background.....	1-1
1.2 Applicable Waterbody Segment Use.....	1-3
1.3 Applicable Waterbody Segment Standard.....	1-3
2.0 TMDL ENDPOINT AND WATER QUALITY ASSESSMENT	2-1
2.1 Selection of a TMDL Endpoint and Critical Condition.....	2-1
2.2 Discussion of Instream Water Quality.....	2-1
2.2.1 Inventory of Available Water Quality Monitoring Data	2-1
2.2.2 Analysis of Instream Water Quality Monitoring Data.....	2-3
3.0 SOURCE ASSESSMENT	3-1
3.1 Assessment of Point Sources	3-1
3.2 Assessment of Nonpoint Sources.....	3-2
3.2.1 Failing Septic Systems.....	3-4
3.2.2 Wildlife	3-4
3.2.3 Land Application of Hog and Cattle Manure	3-4
3.2.4 Grazing Beef and Dairy Cattle.....	3-5
3.2.5 Cattle Contributions Deposited Directly Instream.....	3-5
3.2.6 Urban Development.....	3-5
4.0 MODELING PROCEDURE: LINKING THE SOURCES TO THE ENDPOINT.....	4-1
4.1 Modeling Framework Selection.....	4-1
4.2 Model Setup.....	4-1
4.3 Source Representation	4-2
4.3.1 Failing Septic Systems.....	4-2
4.3.2 Wildlife	4-3
4.3.3 Land Application of Hog and Cattle Manure	4-3
4.3.4 Grazing Beef and Dairy Cattle.....	4-3
4.3.5 Cattle Contributions Deposited Directly Instream.....	4-4
4.3.6 Urban Development.....	4-4
4.4 Stream Characteristics	4-5
4.5 Selection of Representative Modeling Period	4-6
4.6 Model Calibration Process.....	4-7
4.7 Existing Loading.....	4-7
5.0 ALLOCATION.....	5-1
5.1 Wasteload Allocations	5-1

5.2 Load Allocations 5-1
5.3 Incorporation of a Margin of Safety 5-3
5.4 Seasonality 5-3

6.0 IMPLEMENTATION 6-1
 6.1 Follow-up Monitoring 6-1
 6.2 Reasonable Assurance 6-1
 6.3 Public Participation 6-1

APPENDIX A A-1
APPENDIX B B-1
DEFINITIONS D-1
ABBREVIATIONS AB-1
REFERENCES R-1

MONITORED SEGMENT IDENTIFICATION

Name:	Tchoutacabouffa River
Waterbody ID:	MS117M1
Location:	Near Biloxi: From Headwaters West of Larue to Mouth at Biloxi Bay
County:	Harrison, Jackson, and Stone Counties, Mississippi
USGS HUC Code:	03170009
NRCS Watershed:	150
Length:	31 miles
Use Impairment:	Contact Recreation
Cause Noted:	Fecal Coliform, an Indicator for the Presence of Pathogenic Bacteria
Priority Rank:	79
NPDES Permits:	There is one NPDES Permit issued for a facility that discharges fecal coliform in the watershed (Table 3.1).
Standards Variance:	None
Pollutant Standard:	Fecal coliform colony counts shall not exceed a geometric mean of 200 per 100 ml, nor shall more than ten percent of the samples examined exceed a colony count of 400 per 100 ml.
Waste Load Allocation:	1.33E+12 counts/ 30 days (The TMDL requires all dischargers to meet water quality standards for disinfection.)
Load Allocation:	2.08E+12 counts/ 30 days
Margin of Safety:	Implicit modeling assumptions - The model was run for a time span of 11 years.
Total Maximum Daily Load (TMDL):	3.41E+12 counts/ 30 days The TMDL is a combination of the direct input of fecal coliform from NPDES Permitted dischargers and nonpoint sources due to cows with access to streams, failing septic tanks, and land surface fecal coliform application rates necessary to meet the fecal coliform standard.

EXECUTIVE SUMMARY

The Tchoutacabouffa River has been placed on the Mississippi 1998 Section 303(d) List of Waterbodies as an impaired waterbody segment, due to fecal coliform bacteria. The applicable state standard specifies that the maximum allowable level of fecal coliform shall not exceed a geometric mean of 200 per 100 ml, nor shall more than ten percent of the samples examined during any month exceed a colony count of 400 per 100 ml. A review of the available monitoring data for the watershed indicates that there is a violation of the standard for the impaired waterbody.

The Tchoutacabouffa River flows in a southern direction from its headwaters until it empties into the Biloxi Bay. This TMDL has been developed for the impaired section of the Tchoutacabouffa River. The 31-mile long impaired section of the river is located in Harrison, Jackson, and Stone Counties near Biloxi from its headwaters near Larue to its mouth at the Biloxi Bay. The BASINS Nonpoint Source Model (NPSM) was selected as the modeling framework for performing the TMDL allocations for this study. Since there is no continuous USGS Gage located on the Tchoutacabouffa River, daily flow values from the USGS Gage 02480500 on Tuxachanie Creek near Biloxi were used to calibrate the hydrologic flow for the watershed. The weather data used for this model were collected at Saucier Experimental Forest Station. The representative hydrologic period used for this TMDL was January 1, 1985, through December 31, 1995.

Fecal coliform loading from nonpoint sources in the watershed were calculated based upon wildlife populations; numbers of cattle and hogs; information on livestock and manure management practices for the Coastal Basin; and urban development. The estimated fecal coliform production and accumulation rates due to nonpoint sources for the watershed were incorporated into the model. Also represented in the model were the nonpoint sources such as failing septic systems and cattle that have direct access to the tributaries of the Tchoutacabouffa River. There is one NPDES Permitted discharge located in the watershed and included as a point source in the model. Under existing conditions, output from the model indicates violation of the fecal coliform standard in the stream. After applying a load reduction scenario, there were no violations of the standard according to the model.

The scenario used to reduce the fecal coliform load involves a cooperative effort between all fecal coliform contributors in the Tchoutacabouffa River Watershed. First, all NPDES facilities will be required to treat their discharge so that the fecal coliform concentrations do not exceed water quality standards. Monitoring of all permitted facilities in the Tchoutacabouffa River Watershed should be continued to ensure that compliance with permit limits is consistently attained. Second is the removal of 70% of the cattle's direct access to tributaries. This could be accomplished by fencing streams in cattle pastures. Education on best management practices is a vital part of achieving this goal. Finally, a 75% reduction in the fecal coliform contribution from failing septic tanks is required. The model assumed there is a 80% failure rate of septic tanks in the drainage area. A reduction could be accomplished by education on best management practices for septic tank owners. Additionally, users of individual onsite wastewater treatment plants could be educated on the importance of disinfection of the effluent from their treatment plant.

The model accounted for seasonal variations in hydrology, climatic conditions, and watershed activities. The use of the continuous simulation model allowed for consideration of the seasonal aspects of rainfall and temperature patterns within the watershed. Calculation of the fecal coliform accumulation parameters and source contributions on a monthly basis accounted for seasonal variations in watershed activities such as livestock grazing and land application of manure.


1.0 INTRODUCTION

1.1 Background

The identification of waterbodies not meeting their designated use and the development of total maximum daily loads (TMDLs) for those waterbodies are required by Section 303(d) of the Clean Water Act and the Environmental Protection Agency's (EPA) Water Quality Planning and Management Regulations (40 CFR part 130). The TMDL process is designed to restore and maintain the quality of those impaired waterbodies through the establishment of pollutant specific allowable loads. The pollutant of concern for this TMDL is fecal coliform. Fecal coliform bacteria are used as indicator organisms. They are readily identifiable and indicate the possible presence of other pathogenic organisms in the waterbody. The TMDL process can be used to establish water quality based controls to reduce pollution from both point and nonpoint sources, and to restore and maintain the quality of water resources.

The Mississippi Department of Environmental Quality (MDEQ) has identified the Tchoutacabouffa River as being impaired by fecal coliform bacteria for its entire length of 31 miles as reported in the Mississippi 1998 Section 303(d) List of Waterbodies. The river is listed as impaired because sufficient monitoring data is available to show that there is an impairment in this river. The Tchoutacabouffa River is located in Harrison, Jackson, and Stone Counties near Biloxi from its headwaters near Larue to its mouth at the Biloxi Bay. The Tchoutacabouffa River is highlighted in Figure 1.1.

Figure 1.1 The Tchoutacabouffa River Location Map

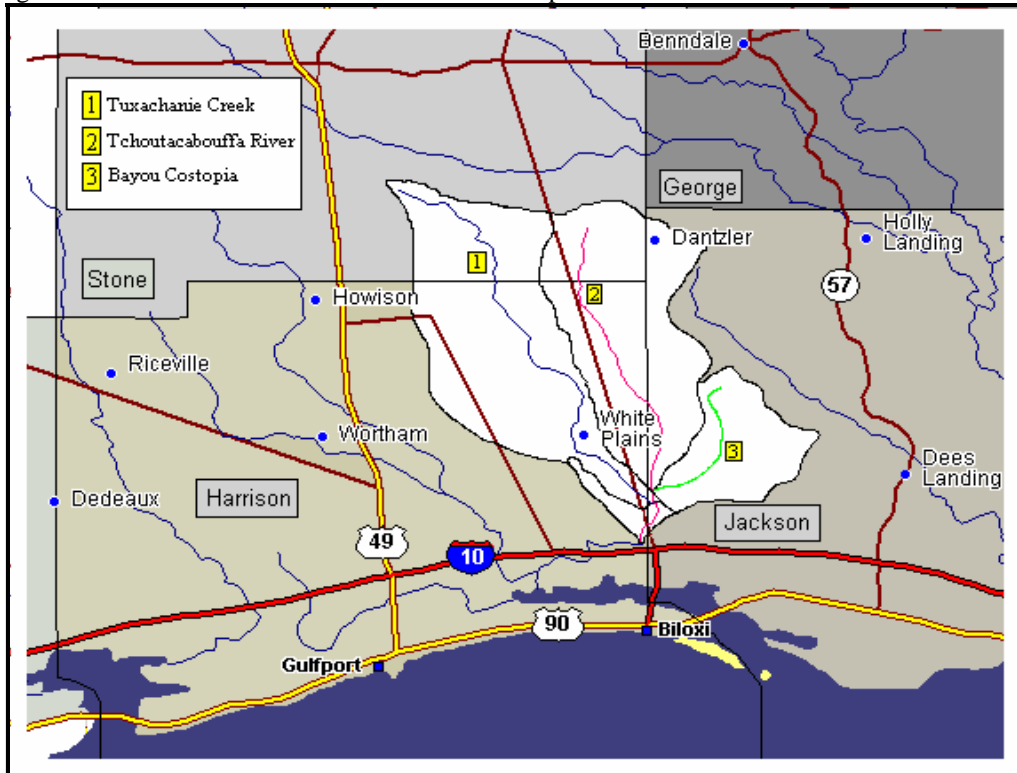


In order to analyze the sources of fecal coliform bacteria in the Tchoutacabouffa River Watershed, the drainage area, or watershed, was divided into five separate subwatersheds based on the major tributaries and topography. Tuxachanie Creek (MS117M2) is an impaired major tributary within the Tchoutacabouffa River Watershed. This waterbody has been modeled separately and input into the Tchoutacabouffa River model as a point source. The remaining area of the watershed was divided into four separate subwatersheds. The Tchoutacabouffa River is located within subwatersheds 03170009006, 03170009007, and 03170009009. Bayou Costopia, a major tributary of the Tchoutacabouffa River, is located within subwatershed 03170009008. The load and waste load allocations required in this TMDL are based on water quality in the most downstream subwatershed 03170009006.

The Tchoutacabouffa River is located in the Coastal Basin Hydrologic Unit Code (HUC) 03170009 in southeastern Mississippi. The drainage area of the monitored segment from the headwaters to the end of the impaired section is approximately 71,000 acres; and lies within portions of Harrison, Jackson, and Stone Counties. The watershed is rural in nature and does not include any major cities. The watershed does contain some smaller communities such as White Plains, Success, and Dantzler

As shown in Figure 1.2, the drainage area for the monitored section begins at the headwaters of the Tchoutacabouffa River and the Bayou Costopia. Forest is the dominant landuse within the Tchoutacabouffa River Watershed. Figure 3.1 shows the landuse distribution within the monitored drainage area.

Figure 1.2 The Tchoutacabouffa River Watershed

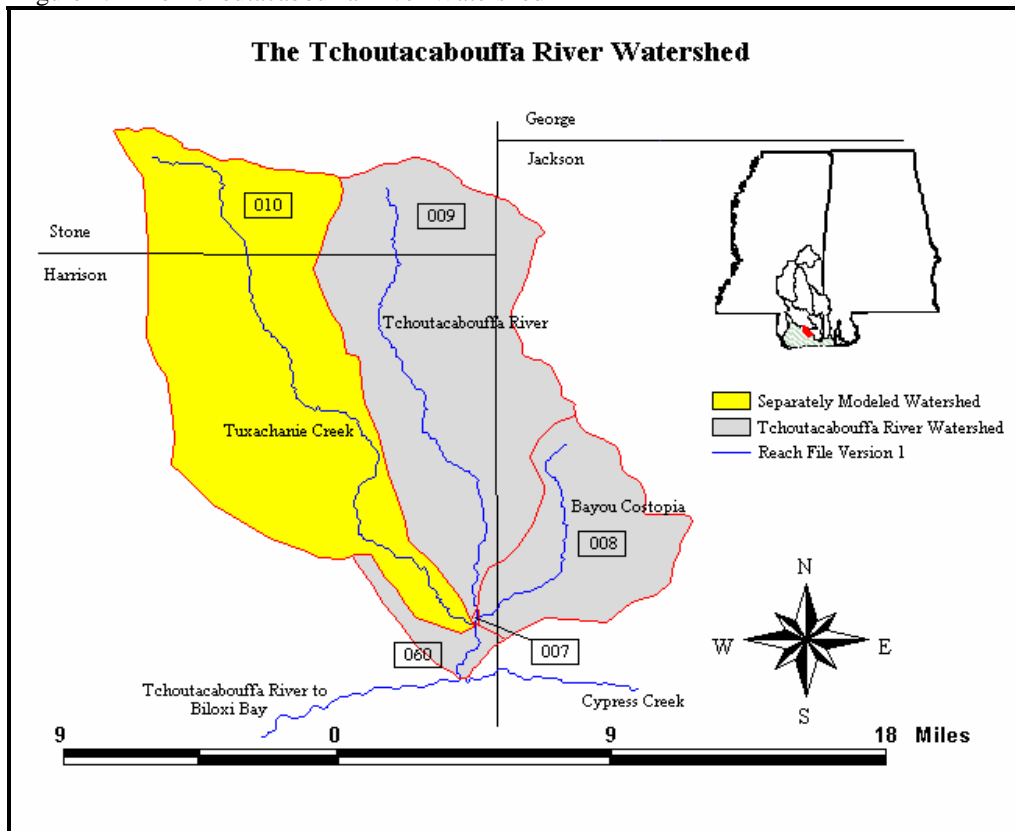

1.2 Applicable Waterbody Segment Use

Designated beneficial uses and water quality standards are established by the *State of Mississippi Water Quality Criteria for Intrastate, Interstate, and Coastal Waters* regulations. The designated use for the Tchoutacabouffa River as defined by the regulations is Contact Recreation.

1.3 Applicable Waterbody Segment Standard

The water quality standard applicable to the use of the waterbody and the pollutant of concern is defined in the *State of Mississippi Water Quality Criteria for Intrastate, Interstate, and Coastal Waters*. The standard states that the fecal coliform colony counts shall not exceed a geometric mean of 200 per 100 ml, nor shall more than ten percent of the samples examined during any month exceed a colony count of 400 per 100 ml. This water quality standard will be used as targeted endpoints to evaluate impairments and establish this TMDL.

2.0 TMDL ENDPOINT AND WATER QUALITY ASSESSMENT

2.1 Selection of a TMDL Endpoint and Critical Condition

One of the major components of a TMDL is the establishment of instream numeric endpoints, which are used to evaluate the attainment of acceptable water quality. Instream numeric endpoints, therefore, represent the water quality goals that are to be achieved by implementing the load and waste load reductions specified in the TMDL. The endpoints allow for a comparison between observed instream conditions and conditions that are expected to restore designated uses. The instream fecal coliform target for this TMDL is a 30-day geometric mean of 200 colony counts per 100 ml.

Because fecal coliform may be attributed to both nonpoint and point sources, the critical condition used for the modeling and evaluation of stream response was represented by a multi-year period. Critical conditions for waters impaired by nonpoint sources generally occur during periods of wet-weather and high surface runoff. But, critical conditions for point source dominated systems generally occur during low-flow, low-dilution conditions. The 1985-1995 period represents both low-flow conditions as well as wet-weather conditions and encompasses a range of wet and dry seasons. Therefore, the 11-year period was selected as representing critical conditions associated with all potential sources of fecal coliform bacteria within the watershed.

2.2 Discussion of Instream Water Quality

Water quality data available for the Tchoutacabouffa River show that high levels of fecal coliform bacteria frequently impair the stream. There is one ambient station operated by MDEQ that collected fecal coliform monitoring data during the 11-year modeling period. Station 02480350 located on the Tchoutacabouffa River near Biloxi made measurements of flow and fecal coliform between June 1993 and March 1999. The measurements were done primarily on a monthly basis. The data indicate that high instream fecal coliform concentrations occurred during both periods of high-flow and dry, low-flow conditions.

2.2.1 Inventory of Available Water Quality Monitoring Data

The State's 1998 Section 305(b) Water Quality Assessment Report was reviewed to assess water quality conditions and data available for the watershed. According to the report, the Tchoutacabouffa River is partially supporting the use of Contact Recreation. These conclusions were based on instantaneous data collected at station 02480350. Data collected at this station are listed below in Table 2.1.

Table 2.1 Fecal Coliform Data Reported in the Tchoutacabouffa River, Station #02480350

Date	Fecal Coliform (counts/100 ml)
06/09/93	300
07/13/93	3000
08/03/93	210
09/14/93	110
10/05/93	330
11/02/93	500
11/30/93	80
01/11/94	700
02/08/94	110
03/08/94	130
06/07/94	240
08/01/94	24
08/23/94	50
01/31/95	53
04/04/95	30
12/12/96	103
01/14/97	47
02/10/97	48
03/17/97	6
04/08/97	43
05/13/97	17
06/12/97	190
07/08/97	1000
08/12/97	80
09/02/97	270
10/01/97	370
11/13/97	2170
12/02/97	170
01/13/98	340
02/10/98	10
03/05/98	3
04/02/98	700
06/11/98	70

07/20/98	117
08/04/98	20
09/03/98	140
10/07/98	460
11/02/98	49
12/02/98	48
01/11/99	3
02/22/99	20
03/10/99	93

2.2.2 Analysis of Instream Water Quality Monitoring Data

A statistical summary of the water quality data discussed above is presented in Table 2.3. Samples are compared to the instantaneous maximum standard of 400 counts per 100 ml. The percent exceedance was calculated by dividing the number of exceedances by the total number of samples and does not represent the amount of time that the water quality is in violation.

Table 2.3 Statistical Summary

Station Number	Number of Samples	Minimum Value (counts/100 ml)	Maximum Value (counts/100 ml)	Number of Exceedances	Percent Instantaneous Exceedance
02480350	42	3	3000	7	17%

3.0 SOURCE ASSESSMENT

The TMDL evaluation summarized in this report examined all known potential fecal coliform sources in the Tchoutacabouffa River Watershed. The source assessment was used as the basis of development for the model and the ultimate analysis of the TMDL allocation options. In evaluation of the sources, loads were characterized by the best available information, monitoring data, literature values, and local management activities. This section documents the available information and interpretation for the analysis. The representation of the following sources in the model is discussed in Section 4.0.

The Tchoutacabouffa River was modeled as three reaches. Although the Tchoutacabouffa River is impaired from its headwaters to its mouth at the Biloxi Bay, its entire length was not modeled due to limitations within the NPSM model. NPSM cannot accurately model tidally influenced waterbodies. Tchoutacabouffa River is under tidal influence from its mouth at the Biloxi Bay until approximately its confluence with Cypress Creek (Figure 1.2). Therefore, this confluence was chosen as the endpoint for the modeled segment. The watershed delineations were based primarily on an analysis of the Reach File 3 (RF3) stream network in the basin as well as a topographic analysis of the watershed.

3.1 Assessment of Point Sources

Point sources of fecal coliform bacteria have their greatest potential impact on water quality during periods of low flow. Thus, a careful evaluation of point sources that discharge fecal coliform bacteria was necessary in order to quantify the degree of impairment present during the low-flow, critical condition period. There is one wastewater treatment plant in the Tchoutacabouffa River Watershed.

A point source assessment was completed for the Tchoutacabouffa River drainage area. Table 3.1 lists the fecal coliform discharger in this watershed, along with the NPDES Permit number and the receiving waterbody.

Once the permitted discharger was located, the effluent from the source was characterized based on all available monitoring data including permit limits, discharge monitoring reports, and information on treatment types. The permitted discharge for the Tchoutacabouffa River Watershed was characterized by the limits of the NPDES Permit. The permit limits of the facility are given in Table 3.1.

Other commercial facilities and point sources are located within the Tchoutacabouffa River Watershed. However, these sources discharge into the tidally influenced section of the river which was unable to be modeled due to limitations within NPSM.

Table 3.1 Inventory of Identified NPDES Permitted Dischargers

Facility Name	Subwatershed	NPDES Permit	Fecal Coliform (counts/100ml)	Receiving Waterbody
West Jackson County Artificial Wetlands	03170009008	MS0045446	200/2000*	Bayou Costopia

*Seasonal limits

3.2 Assessment of Nonpoint Sources

There are many potential nonpoint sources of fecal coliform bacteria for the Tchoutacabouffa River, including:

- ◆ Failing septic systems
- ◆ Wildlife
- ◆ Land application of hog and cattle manure
- ◆ Grazing animals
- ◆ Cattle contributions directly deposited instream
- ◆ Urban development


The 71,264-acre drainage area of the Tchoutacabouffa River contains many different landuse types, including urban, forests, cropland, pasture, barren, and wetlands. The landuse information is based on data collected by the State of Mississippi’s Automated Information System (MARIS, 1997). This data set is based on Landsat Thematic Mapper digital images taken between 1992 and 1993. This classification is based on a modified Anderson level one and two system with additional level two wetland classifications. The contribution of each of these land types to the fecal coliform loading of the Tchoutacabouffa River was considered on a subwatershed basis. Table 3.2 shows the landuse distribution within the subwatershed in acres.

The contribution of fecal coliform due to land application of poultry litter was considered in the Tchoutacabouffa River Watershed nonpoint source assessment. Since there are no known chicken houses in the Tchoutacabouffa River Watershed, land application of poultry litter is not considered as a source of fecal coliform for this watershed.

Table 3.2 Landuse Distribution in Number of Acres

Subwatershed	Forest	Croplands	Pasture	Urban	Barren	Wetland	Total
03170009006	1,221	3	719	8	0	757	2,708
03170009007	9	0	1	0	0	23	33
03170009008	10,098	111	2,313	38	148	5,460	18,168
03170009009	34,736	120	3,225	0	24	12,250	50,355
Total	46,064	234	6,258	46	172	18,490	71,264

Figure 3.1 The Tchoutacabouffa River Landuse Distribution

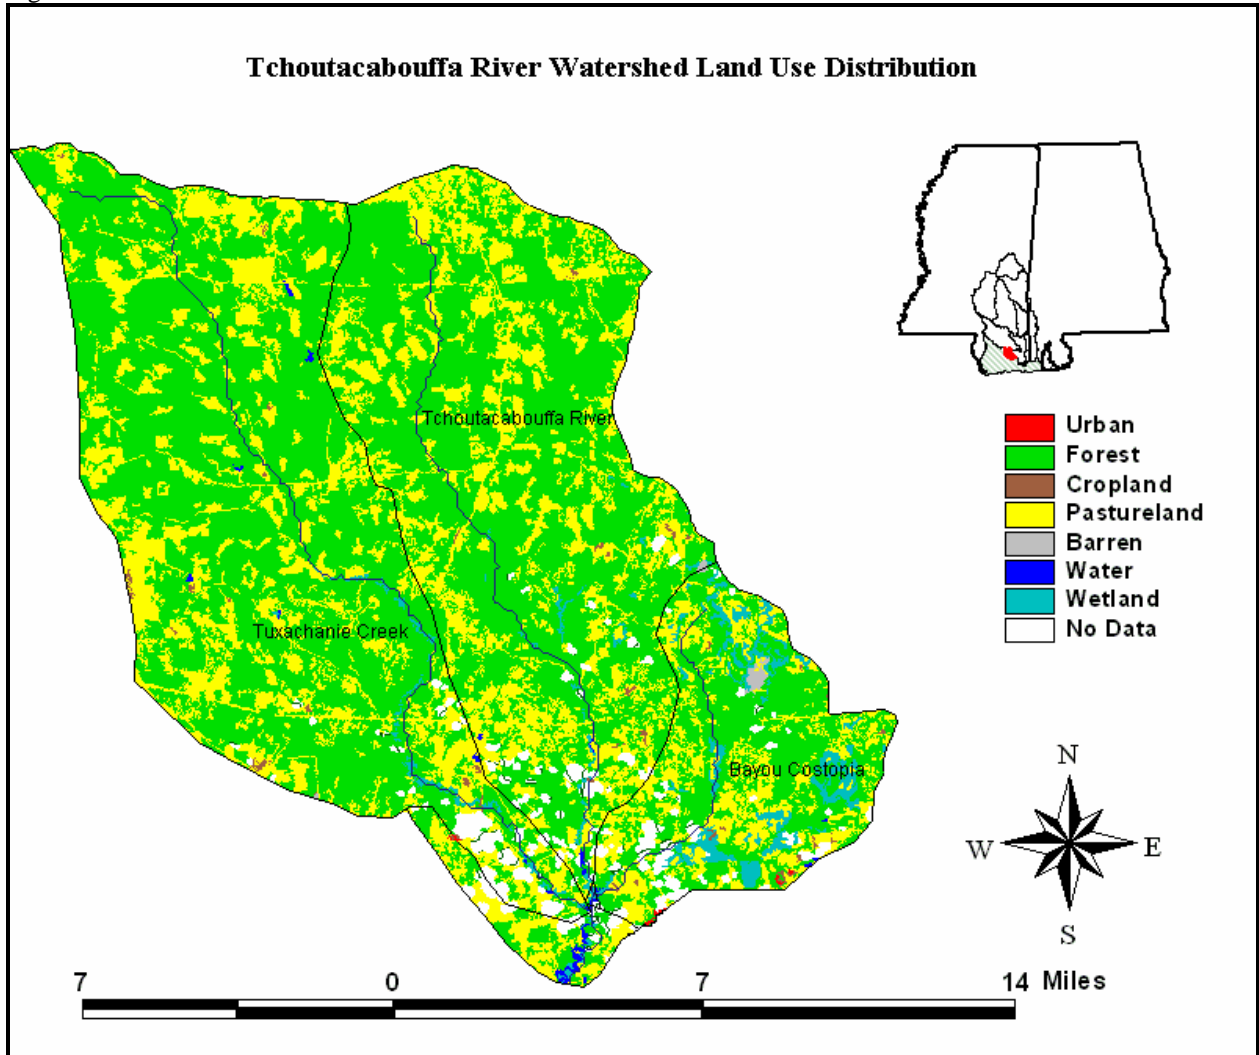

The nonpoint fecal coliform contribution from each landuse was estimated using the latest information available. The MARIS landuse data for Mississippi was utilized by the BASINS model to extract landuse sizes, populations, agriculture census data, and other information. MDEQ contacted several agencies to refine the assumptions made in determining the fecal coliform loading. The Mississippi Department of Wildlife, Fisheries, and Parks provided information of wildlife density in the Tchoutacabouffa River Watershed. The Mississippi State Department of Health was contacted regarding the failure rate of septic tank systems in this portion of the state. Mississippi State University researchers provided information on manure application practices and loading rates for hog farms and cattle operations. The Natural Resources Conservation Service also gave MDEQ information on manure treatment practices and land application of manure.

3.2.1 Failing Septic Systems

Septic systems have a potential to deliver fecal coliform bacteria loads to surface waters due to malfunctions, failures, and direct pipe discharges. Properly operating septic systems treat wastewater and dispose of the water through a series of underground field lines. The water is applied through these lines into a rock substrate, thence into underground absorption. The systems can fail when the field lines are broken, or when the underground substrate is clogged or flooded. A failing septic system's discharge can reach the surface, where it becomes available for wash-off into the stream. Another potential problem is a direct bypass from the system to a stream. In an effort to keep the water off the land, pipes are occasionally placed from the septic tank or the field lines directly to the creek, which can be represented as a point source.

Another consideration is the use of individual onsite wastewater treatment plants. These treatment systems are in wide use in Mississippi. They can adequately treat wastewater when properly maintained. However, these systems do not typically receive the maintenance needed for proper, long-term operation. These systems require some sort of disinfection to properly operate. When this expense is ignored, the water does not receive adequate disinfection prior to release.

3.2.2 Wildlife

Wildlife present in the Tchoutacabouffa River Watershed contributes to fecal coliform bacteria on the land surface. In the Tchoutacabouffa River model, all wildlife was accounted for by considering contributions from deer. Estimates of deer population were designed to account for the deer combined with all of the other wildlife contributing to the area. An upper limit of 45 deer per square mile was used as the estimate. It was assumed that the wildlife population remained constant throughout the year, and that wildlife was present on all land classified as pastureland, cropland, and forest. It was also assumed that the wildlife and the manure produced by the wildlife were evenly distributed throughout these land types.

3.2.3 Land Application of Hog and Cattle Manure

In the Coastal Basin processed manure from confined hog and dairy cattle operations is collected in lagoons and routinely applied to pastureland during March through May and October through November. This manure is a potential contributor of bacteria to receiving waterbodies due to runoff produced during a rain event. Hog farms in the Coastal Basin operate by either keeping the animals confined by or allowing hogs to graze in a small pasture or pen. For this model, it was assumed that all of the hog manure produced by either farming method was applied evenly to the available pastureland. Application rates of hog manure to pastureland from confined operations varied monthly according to management practices currently used in this area.

The dairy farms that are currently operating in the Tchoutacabouffa River Watershed only confine the animals for a limited time during the day. The model assumed a confinement time of four hours per day, during which time the cattle are milked and fed. During all other times, dairy cattle are

allowed to graze on pasturelands. The manure collected during confinement is applied to the available pastureland in the watershed. Like the hog farms, application rates of dairy cow manure to pastureland vary monthly according to management practices currently used in this area.

3.2.4 Grazing Beef and Dairy Cattle

Grazing cattle deposit manure on pastureland where it is available for wash-off and delivery to receiving waterbodies. Beef cattle have access to pastureland for grazing all of the time. However, dairy cattle can spend four hours per day confined in milking barns, and the remainder of their time grazing on pastureland. Manure produced by grazing beef and dairy cows is directly deposited onto pastureland.

3.2.5 Cattle Contributions Directly Deposited Instream

Cattle often have direct access to flowing and intermittent streams that run through pastureland. These small streams are tributaries of larger streams. Fecal coliform bacteria deposited in these streams by grazing cattle are modeled as a direct input of bacteria to the stream. Due to the general topography in the Tchoutacabouffa River Watershed, it was assumed that all land slopes in the watershed are such that cattle are able to access the intermittent streams in all pastures. In order to determine the amount of bacteria introduced into streams from cattle, it was assumed that all grazing cattle spent five percent of their time standing in the streams. Thus, the model assumes that five percent of the manure produced by grazing beef and dairy cows are deposited directly in the stream.

3.2.6 Urban Development

Urban areas include land classified as urban and barren. Even though only a small percentage of the watershed is classified as urban, the contribution of the urban areas to fecal coliform loading in the Tchoutacabouffa River was considered. Fecal coliform contributions from urban areas may come from storm water runoff, runoff from construction sites, and runoff contribution from improper disposal of materials such as household toxic materials and litter.

4.0 MODELING PROCEDURE: LINKING THE SOURCES TO THE ENDPOINT

Establishing the relationship between the instream water quality target and the source loading is a critical component of TMDL development. It allows for the evaluation of management options that will achieve the desired source load reductions. The link can be established through a range of techniques, from qualitative assumptions based on sound scientific principles to sophisticated modeling techniques. Ideally, the linkage will be supported by monitoring data that allow the TMDL developer to associate certain waterbody responses to flow and loading conditions. In this section, the selection of the modeling tools, setup, and model application are discussed.

4.1 Modeling Framework Selection

The BASINS model platform and the NPSM model were used to predict the significance of fecal coliform sources to fecal coliform levels in the Tchoutacabouffa River Watershed. BASINS is a multipurpose environmental analysis system for use in performing watershed and water quality-based studies. A geographic information system (GIS) provides the integrating framework for BASINS and allows for the display and analysis of a wide variety of landscape information such as landuses, monitoring stations, point source discharges, and stream descriptions. The NPSM model simulates nonpoint source runoff from selected watersheds, as well as the transport and flow of the pollutants through stream reaches. A key reason for using BASINS as the modeling framework is its ability to integrate both point and nonpoint sources in the simulation, as well as its ability to assess instream water quality response.

4.2 Model Setup

The Tchoutacabouffa River TMDL model includes the listed section of the river as well as all of the drainage area that is upstream of the segment. Tuxachanie Creek (MS117M2), a major tributary of the Tchoutacabouffa River, was modeled previously for a separate TMDL report and project. Therefore, Tuxachanie Creek was added to the Tchoutacabouffa River model as a point source. This point source input allows the model to assess Tuxachanie Creek’s contribution to the hydrology and fecal coliform loading in the lower reaches of the Tchoutacabouffa River. This point source input of Tuxachanie Creek was added to the model with both the existing loading conditions and after the load reduction scenario was applied. Thus, all upstream contributors of bacteria are accounted for in the model. Table 4.1 gives the fecal coliform load reduction scenarios for the Tuxachanie Creek input.

Table 4.1 Reduction Scenarios for Separately Modeled Tributaries of Tuxachanie Creek

	NPDES Permitted Facilities	Cattle Access to Streams	Failing Septic Tanks
Tuxachanie Creek	meet water quality standards	80%	75%

To obtain a spatial variation of the concentration of bacteria along the Tchoutacabouffa River, the watershed was divided into four subwatersheds in an effort to isolate the major stream reaches in the Tchoutacabouffa River Watershed. This allowed the relative contribution of point and nonpoint sources to be addressed within each subwatershed.

4.3 Source Representation

Both point and nonpoint sources were represented in this model. Due to die-off rates and overland transportation assumptions, the fecal coliform loading from point and nonpoint sources must be addressed separately. There is one NPDES Permitted facility in the Tchoutacabouffa River Watershed which discharges fecal coliform bacteria. The discharge was added as a direct input into the waterbody. Fecal coliform loading rates for point sources are input to the model as flow in cubic feet per second and fecal coliform contribution in counts per hour.

The nonpoint sources are represented in the model with two different methods. The first of these methods is a direct fecal coliform loading to the Tchoutacabouffa River. Other sources are represented as an application rate to the land in the Tchoutacabouffa River Watershed. For these sources, fecal coliform accumulation rates in counts per acre per day were calculated for the watershed on a monthly basis and input to the model for each landuse. Fecal coliform contributions from forests and wetlands were considered at the same time, and all forest and wetland contributions were combined for model input. Urban and barren areas were combined and input into the model in the same manner.

The contribution of fecal coliform due to land application of poultry litter was considered in the Tchoutacabouffa River Watershed nonpoint source assessment. Since there are no known chicken houses in the Tchoutacabouffa River Watershed, land application of poultry litter is not considered as a source of fecal coliform for this watershed.

Appendix A contains the Fecal Coliform Spreadsheet developed for quantifying point and nonpoint sources of bacteria for the Tchoutacabouffa River model. The model inputs for fecal coliform loading due to point and nonpoint sources are calculated using assumptions about land management, septic systems, farming practices, and permitted point source contributions. Each of the potential bacteria sources is covered in the fecal coliform spreadsheet. The spreadsheet also contains a reference page that lists the literature references used to generate the fecal coliform loading rates.

4.3.1 Failing Septic Systems

The number of failing septic systems used in the model was derived from the watershed area normalized population of Harrison, Jackson, and Stone Counties. The percentage of the population on septic systems, which was determined from 1990 United States Census Data, is given in Table 4.2. Based on the best available information, a failure rate of 80% was assumed. This information was used to calculate the estimated number of failing septic tanks per watershed. The number of failing septic tanks also incorporates an estimate for the failing onsite wastewater treatment systems in the area.

Table 4.2 Percent of Population on Septic Systems, by County

County	Percent on Septic Systems
Harrison	19%
Jackson	27%
Stone	67%

Discharges from failing septic systems were quantified based on several factors including the estimated population served by the septic systems, an average daily discharge of 100 gallons per person per day, and a septic system effluent fecal coliform concentration of 10^4 counts per 100 ml. The model inputs for flow and fecal coliform concentration from failing septic tanks are shown in Appendix A.

4.3.2 Wildlife

Based on information provided by the Mississippi Department of Wildlife, Fisheries, and Parks, the deer population throughout the Tchoutacabouffa River Watershed was estimated to be 30 to 45 animals per square mile. For the model, the upper limit of 45 deer per square mile was used to account for the deer and all other wildlife contributing to fecal coliform accumulation in the area. The wildlife contribution in counts per acre per day is calculated by multiplying a loading rate by the number of animals. The loading rate used in the model was estimated to be $5.00E+08$ counts per day per animal. The loading rate for the watershed is available in Appendix A.

4.3.3 Land Application of Hog and Cattle Manure

The fecal coliform spreadsheet was used to estimate the amount of waste and the concentration of fecal coliform bacteria contained in hog and dairy cattle manure produced by confined animal feeding operations. The livestock count per county is based upon the 1997 Census of Agriculture data. The county livestock count is used to estimate the number of livestock on a subwatershed scale. This is calculated by multiplying the county livestock figures with the area of the county within the subwatershed boundaries. This estimate is made with the assumption that the livestock are uniformly distributed throughout the county. A fecal coliform production rate in counts per day per animals was multiplied by the number of confined animals to quantify the amount of bacteria produced. The manure produced by these operations is collected in lagoons and applied evenly to all pastureland. Manure application rates to pastureland vary on a monthly basis. This monthly variation is incorporated into the model by using monthly loading rates. The fecal coliform loading rates for land application of hog and liquid dairy manure are shown in Appendix A.

4.3.4 Grazing Beef and Dairy Cattle

The model assumes that the manure produced by grazing beef and dairy cattle is evenly spread on pastureland throughout the year. The fecal coliform content of manure produced by grazing cattle is estimated by multiplying the number of grazing cattle by a fecal coliform production of $5.40E+09$

counts per day per animal. The resulting fecal coliform loads are in the units of counts per acre per day. The fecal coliform loading rates due to grazing cattle are shown in the spreadsheet in Appendix A.

4.3.5 Cattle Contributions Deposited Directly Instream

The contribution of fecal coliform from cattle to a stream is represented as a direct input into the stream by the model. In order to estimate the point source loading produced by grazing beef and dairy cattle with access to streams, it is assumed that five percent of the number of grazing cattle in each watershed are standing in a stream at any given time. When cattle are standing in a stream, their fecal coliform production is estimated as flow in cubic feet per second and a concentration in counts per hour. As shown in Appendix A, the fecal coliform concentration is calculated using the number of cows in the stream and a bacteria production rate of 5.40E+09 counts per animal per day.

4.3.6 Urban Development

The MARIS landuse data divide urban land into several categories. For the Tchoutacabouffa River Watershed, the urban land is divided into three different categories: high density, low density, and transportation. For the model, fecal coliform buildup rates for each category were determined by using literature values from Horner, 1992. The literature value accounts for all of the potential fecal coliform sources in each urban category. The literature values for each urban landuse category are given in Tables 4.3. Table 4.4 shows the urban landuse distribution within the watershed. In the model, fecal coliform loading rates on urban land are input as counts per acre per day. These loading rates for the watershed are shown in Appendix A.

Table 4.3 Urban Loading Rates, by Landuse

High Density Area	Low Density Area	Transportation Area
1.54E+07	1.03E+07	2.00E+05


Table 4.4 Urban Landuse Distribution

Subwatershed	High Density Area (acres)	Low Density Acres (acres)	Transportation Area (acres)	Total
03170009006	1	4	3	8
03170009007	0	0	0	0
03170009008	29	84	73	186
03170009009	4	11	9	24

4.4 Stream Characteristics

The stream characteristics given below describe the modeled section of the Tchoutacabouffa River. This section begins at the headwaters and ends at the confluence with Cypress Creek. Although the Tchoutacabouffa River is impaired from its headwaters to its mouth at the Biloxi Bay, its entire length was not modeled due to limitations within the NPSM model. NPSM cannot accurately model tidally influenced waterbodies. Tchoutacabouffa River is under tidal influence from its mouth at the Biloxi Bay until approximately its confluence with Cypress Creek. Therefore, this confluence was chosen as the endpoint for the modeled segment. The channel geometry and lengths for the Tchoutacabouffa River are based on data available within the BASINS modeling system. Figure 4.1 shows the modeled section of the Tchoutacabouffa River which was divided into three segments in BASINS. The 7Q10 flow was determined from USGS data. A partial-record station, station 02480350, was located on the Tchoutacabouffa River.

Figure 4.1 Segment Identification Map

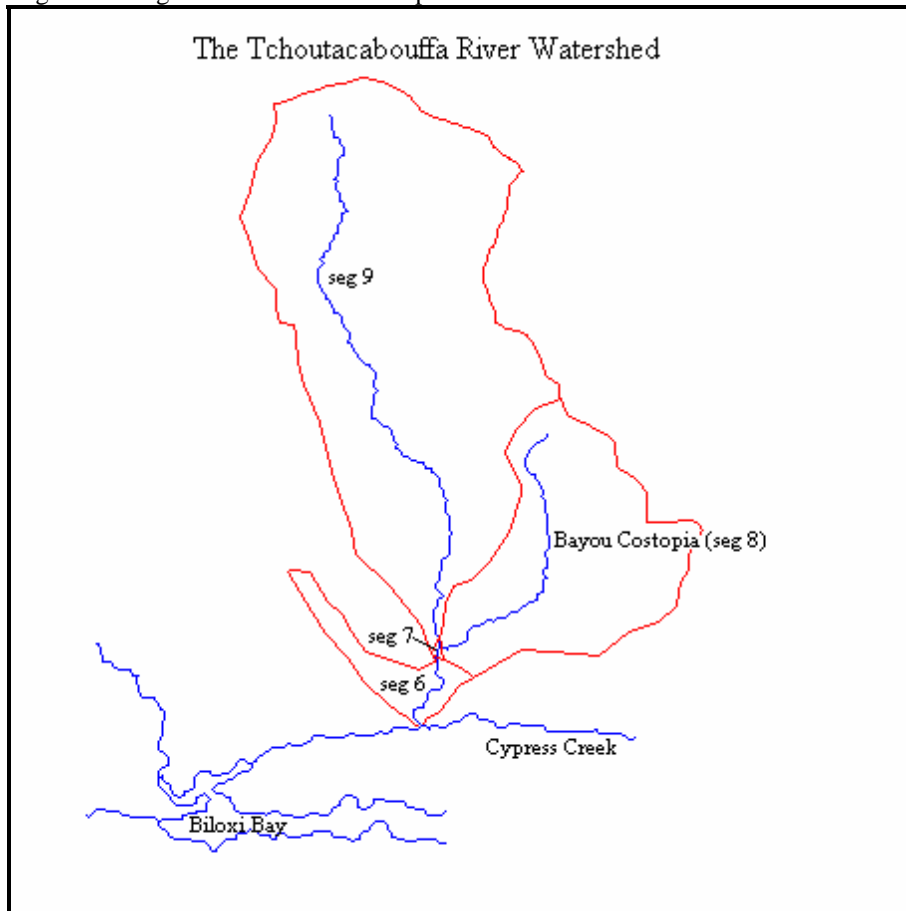

The characteristics of the modeled section of the Tchoutacabouffa River are as follows:

Tchoutacabouffa River Segment 9 (most upstream segment)

- ◆ Length 18.6 miles
- ◆ Average Depth 0.75 ft
- ◆ Average Width 32.62 ft
- ◆ Mean Flow 130.44 cubic ft per second
- ◆ Mean Velocity 1.09 ft per second
- ◆ 7Q10 Flow 5.8 cubic ft per second
- ◆ Slope 0.00141 ft per ft

Tchoutacabouffa River Segment 7

- ◆ Length 0.30 miles
- ◆ Average Depth 1.31 ft
- ◆ Average Width 72.85 ft
- ◆ Mean Flow 195.65 cubic ft per second
- ◆ Mean Velocity 1.00 ft per second
- ◆ 7Q10 Flow 5.8 cubic ft per second
- ◆ Slope 0.00010 ft per ft

Tchoutacabouffa River Segment 6 (most downstream segment)

- ◆ Length 2.5 miles
- ◆ Average Depth 1.33 ft
- ◆ Average Width 92.04 ft
- ◆ Mean Flow 412.03 cubic ft per second
- ◆ Mean Velocity 1.41 ft per second
- ◆ 7Q10 Flow 5.8 cubic ft per second
- ◆ Slope 0.00010 ft per ft

4.5 Selection of Representative Modeling Period

The model was run for 12 years, from January 1, 1984, through December 31, 1995. The first year of data were used to stabilize the model. Results from the model were evaluated for the time period from January 1, 1985, until December 31, 1995. Because this 11-year time span is used, a margin of safety is implicitly applied. Seasonality and critical conditions are accounted for during the extended time frame of the simulation.

The critical condition for fecal coliform impairment from nonpoint source contributors occurs after a heavy rainfall that is preceded by several days of dry weather. The dry weather allows a build up of fecal coliform bacteria, which is then washed off the ground by a heavy rainfall. By using the 11-year time period, many such occurrences are captured in the model results. Critical conditions for point sources, which occur during low-flow and low-dilution conditions, are simulated as well.

4.6 Model Calibration Process

The model was calibrated for hydrology on various gages in southeast Mississippi. A set of input values was established through the hydrologic calibration. The hydrological model did not have a continuous USGS gage available on the Tchoutacabouffa River. Therefore, USGS Gage 02480500 on Tuxachanie Creek near Biloxi was used for comparison with the modeled flow. A sample of these results is included in Appendix B, Graph B-1. The modeled output and the most recent actual gage data are shown on the same graph. There is a very good correlation between the two data sets.

MDEQ contacted researchers and agricultural experts to quantify representative pathogen loads entering the stream and give as much validity as possible to the assumptions made within the BASINS model. The weather data used for this model were collected at Saucier Experimental Forest Station. The representative hydrologic period used for the TMDL was January 1, 1985, through December 31, 1995.

4.7 Existing Loading

Appendix B includes three graphs of the model results showing the instream fecal coliform concentrations for the Tchoutacabouffa River. Graph B-2 shows the fecal coliform levels in the stream during the 11-year modeling period. The graph shows a 30-day geometric mean of the data. There have been 21 standards violations in 11 years according to the model. The straight line at 200 counts per 100 ml indicates the water quality standard for the stream.

Graphs B-3 and B-4 represent the conditions in the Tchoutacabouffa River after the reduction scenario has been applied. Graphs B-3 and B-4 show the fecal coliform concentration when the NPDES point source is discharging at its seasonal limits. Graph B-3 shows no exceedances during December through April when the permitted discharge is 2000 counts per 100 ml. Graph B-4 shows no exceedances during May through November when the permitted discharge is 200 counts per 100 ml. Graph B-3 may appear to show exceedances. However, all of these occur during May through November when the discharger would be at the 200 counts per 100 ml limit. Graphs B-2, B-3, and B-4 are shown with the same scale for comparison purposes.

5.0 ALLOCATION

The allocation for this TMDL involves a wasteload allocation for point sources and a load allocation for nonpoint sources necessary for attainment of water quality standards in segment MS117M1. Point source contributions enter the stream directly in the appropriate reach. Cows in the stream and failing septic tanks were also modeled as direct inputs to the stream. Cows in the stream are nonpoint sources while failing septic tanks are both point and nonpoint sources. The other nonpoint source contributions were applied to land area on a counts per day per acre basis. The fecal coliform bacteria applied to land are subject to a die-off rate and an absorption rate before it enters the stream.

5.1 Wasteload Allocations

Point sources within the watershed discharging at their current level are subject to some reduction from their current level of fecal coliform contribution. The contribution of point sources was considered on a subwatershed basis for the model. Within each subwatershed, the modeled contribution of each discharger was based on the facility’s discharge monitoring data and other records of past performance. As part of this TMDL, all wastewater treatment facilities will be required to meet water quality standards at the end of their pipe. All wastewater treatment facilities with current NPDES Permits that meet water quality standards should take steps to comply with their current permits. Table 5.1 lists the NPDES Permitted discharger and its point source contribution to the watershed, along with its existing load, allocated load, and percent reduction. The final wasteload allocation shown on the summary page also accounts for the portion of failing septic tanks which have direct bypasses to the stream.

Table 5.1 Fecal Coliform Loading Rate for Point Source Contribution from NPDES Permitted Discharger

Subwatershed	Existing Flow (cfs)	Existing Load (counts/hr)	Allocated Flow (cfs)	Allocated Load (counts/hr)	Percent Reduction
03170009008	4.64	9.45E+08	4.64	9.45E+08	0%

5.2 Load Allocations

Nonpoint sources that contribute to fecal coliform accumulation within the Tchoutacabouffa River Watershed are subject to reduction from their current level of contribution. Reductions in the load allocation for this TMDL involve two different types of nonpoint sources: cattle access to streams and septic tanks. Contributions from both of these sources are input into the model in a manner similar to point source input, with a flow and fecal coliform concentration in counts per hour. Table 5.2 lists the nonpoint source contributions due to cattle access to streams in the watershed, along with their existing load, allocated load, and percent reduction. Table 5.3 gives the same parameters for contributions due to septic tank failure. Septic tank failures in reality are both point and nonpoint contributions and have been calculated as equal contributors to the wasteload allocation component and load allocation component of the TMDL calculation.

Table 5.2 Fecal Coliform Loading Rates for Nonpoint Source Contribution of Cattle Access to Streams

Subwatershed	Existing Flow (cfs)	Existing Load (counts/hr)	Allocated Flow (cfs)	Allocated Load (counts/hr)	Percent Reduction
03170009006	9.85E-06	3.76E+08	2.96E-06	1.13E+08	70%
03170009007*	0	0	0	0	0%
03170009008	9.17E-05	3.50E+09	2.75E-05	1.05E+09	70%
03170009009	6.57E-05	2.51E+09	1.97E-05	7.53E+08	70%

*Subwatershed 03170009007 had no cattle due to its small size of only 33 acres.

Table 5.3 Fecal Coliform Loading Rates for the Contribution from Failing Septic Tanks (50% WLA and 50% LA)

Subwatershed	Existing Flow (cfs)	Existing Load (counts/hr)	Allocated Flow (cfs)	Allocated Load (counts/hr)	Percent Reduction
03170009006	3.71E-02	3.78E+08	9.29E-03	9.45E+07	75%
03170009007	6.33E-04	6.44E+06	1.58E-04	1.61E+06	75%
03170009008	1.87E-01	1.90E+09	4.68E-02	4.76E+08	75%
03170009009	4.82E-01	4.90E+09	1.20E-01	1.22E+09	75%

Nonpoint fecal coliform loading due to cattle grazing; land application of manure produced by confined dairy cattle and hogs; wildlife; and urban development are also included in the load allocation. Currently, no reduction is required for these contributors in order for the Tchoutacabouffa River to achieve water quality standards. The loading rates are constant throughout the year for forest, cropland, and urban land. However, the loading rates for pastureland vary monthly. In the Table 5.4 the rates given for pastureland are based on an average of the monthly accumulation rates. The estimated loads shown in Table 5.4 are that applied to the land, while the total load application shown on the summary page is the load which enters the stream due to runoff.

Table 5.4 Fecal Coliform Counts Per Day Applied to Land Available for Land Surface Runoff

Subwatershed	Urban & Barren	Forest & Wetland	Cropland	Pastureland	Total
03170009006	5.74E+07	6.96E+10	1.06E+08	1.99E+11	2.69E11
03170009007	0.0	1.13E+09	0.0	3.52E+07	1.17E+09
03170009008	1.34E+09	5.48E+11	3.91E+09	1.71E+12	2.25E+12
03170009009	1.72E+08	1.65E+12	4.22E+09	1.28E+12	2.94E+12
Total	1.57E+09	2.27E+12	8.24E+09	2.99E+12	5.46E+12

The scenario chosen for the load allocation in the Tchoutacabouffa River Watershed is a 70% reduction in contributions from cows in the stream and a 75% reduction from failing septic tanks. The scenario also requires all permitted dischargers to meet water quality standards for disinfection. This scenario could be achieved by supporting BMP projects that promote fencing around streams in pastures, and by supporting education projects that encourage homeowners to properly maintain their septic tanks by routinely pumping them out, repairing broken field lines, and disinfecting the effluent from small individual onsite wastewater treatment plants.

5.3 Incorporation of a Margin of Safety

The two types of MOS development are to implicitly incorporate the MOS using conservative model assumptions or to explicitly specify a portion of the total TMDL as the MOS. The MOS selected for this model is implicit. Running the model for 11 years with no violations of the water quality standard provides the primary component of the MOS. Ensuring compliance with the standard throughout all of the critical condition periods represented during the 11 years is a conservative practice. Another component of the MOS is the conservative assumption that in the model all of the fecal coliform bacteria discharged from failing septic tanks reaches the stream, while it is likely that only a portion of the bacteria will reach the stream due to filtration and die off during transport.

5.4 Seasonality

For many streams in the state, fecal coliform limits vary according to the seasons. This stream, however, is designated for the use of contact recreation. For this use, the pollutant standard is constant throughout the year.

Because the model was established for an 11-year time span, it took into account all of the seasons within the calendar years from 1985 to 1995. The extended time period allowed the simulation of many different atmospheric conditions such as rainy and dry periods and high and low temperatures. It also allowed seasonal critical conditions to be simulated.

6.0 IMPLEMENTATION

6.1 Follow-Up Monitoring

MDEQ has adopted the Basin Approach to Water Quality Management, a plan that divides Mississippi's major drainage basins into five groups. During each yearlong cycle, MDEQ resources for water quality monitoring will be focused on one of the basin groups. During the next monitoring phase in the Coastal Basin, the Tchoutacabouffa River may receive follow-up monitoring to identify the improvement in water quality from the implementation of the strategies in this TMDL.

6.2 Reasonable Assurance

The fecal coliform reduction scenario used by this TMDL includes requiring all NPDES Permitted dischargers of fecal coliform to meet water standards for disinfection, along with reducing 70% of the cattle access to streams and 75% of the failing septic tanks in the watershed. Reasonable assurance for the implementation of the TMDL has been considered for both point and nonpoint source contributors.

The TMDL will not impact existing or future NPDES Permits as long as the effluent is disinfected to meet water quality standards for fecal coliform bacteria. MDEQ will reject any NPDES Permit application that does not plan to meet water quality standards for disinfection. Education projects that teach best management practices should be used as a tool for reducing nonpoint source contributions. These projects may be funded by CWA Section 319 Nonpoint Source (NPS) Grants.

6.3 Public Participation

This TMDL will be published for a 30-day public notice. During this time, the public will be notified by publication in the statewide newspaper and a newspaper in Biloxi. The public will be given an opportunity to review the TMDL and submit comments. At the end of the 30-day period, MDEQ will determine the level of interest in the TMDL and make a decision on the necessity of holding a public hearing.

If a public hearing is deemed appropriate, the public will be given a 30-day notice of the hearing to be held at a location near the watershed. That public hearing would be an official hearing of the Mississippi Commission on Environmental Quality, and would be transcribed.

All comments received during the public notice period and at any public hearings become a part of the record of this TMDL. All comments will be considered in the ultimate approval of this TMDL by the Commission on Environmental Quality and for submission of this TMDL to EPA Region IV for final approval.

APPENDIX A

The following documents comprise the spreadsheet used to estimate all of the fecal coliform loading used in the model. The spreadsheet consists of several sheets, each dealing with a different aspect of the estimation. The final sheet brings all of the inputs into one format for model input.

THIS SPREADSHEET QUANTIFIES THE FECAL COLIFORM BACTERIA CONTRIBUTION FROM MULTIPLE SOURCES.
 It is based on a modeling study of 9 subwatersheds, composed of four landuses (Cropland, Forest, Built-up, and Pastureland).
 BLUE text found throughout the spreadsheet presents valuable information and assumptions.
 GREEN text designates values specific to the ? Basin.
 RED text designates values which should be specified by the user.
 BLACK text generally presents information which is calculated by the spreadsheet or that should not be changed.

There are 9 subwatersheds on this spreadsheet. The total number of subwatersheds for this study is: 4
 The modeled landuses were derived and grouped from original landuse classifications (MARIS or MRLC).

Modeled landuses

Areas are listed in acres.

SUBSHED	CROPLAND	FOREST	URBAN	PASTURELAND	TOTAL
3170009006	3	1978	8	719	2708
3170009007	0	32	0	1	33
3170009008	111	15559	186	2313	18168
3170009009	120	46986	24	3225	50354
P5	0	0	0	0	0
P6	0	0	0	0	0
P7	0	0	0	0	0
P8	0	0	0	0	0
P9	0	0	0	0	0
TOTAL	234	64555	218	6258	71264

Urban (Built-up) Breakdown

If the real breakdown is known from the original landuse input it rather than using the formulas provided.

Areas are listed in acres.

Modeled	Original	3170009006	3170009007	3170009008	3170009009	P5	P6
BUILT-UP	HIGH DENSITY	1	0	30	4	0	0
BUILT-UP	NOTHING	0	0	0	0	0	0
BUILT-UP	LOW DENSITY	4	0	84	11	0	0
BUILT-UP	TRANSPORTATION	3	0	73	10	0	0

The total number of animals in the 9 subwatersheds are as follows.

Fecal contributions from these animals are used to derive loading estimates for all landuses except for Built-up.
The number input for Poultry should be "Chickens Sold" from tbl_lstock2.dbf divided by 7.

Agricultural Animals

SUBSHED	BEEF COWS	SWINE (HOGS)	DAIRY COWS	POULTRY	CATTLE	BEEF FOR RATIO	MILK FOR RATIO	Check
3170009006	31	0	3	0	34	18	2	34
3170009007	0	0	0	0	0	0	0	0
3170009008	308	3	4	0	312	165	2	312
3170009009	213	3	12	0	225	120	7	225
P5	#DIV/0!	0	#DIV/0!	0	0	0	0	#DIV/0!
P6	#DIV/0!	0	#DIV/0!	0	0	0	0	#DIV/0!
P7	#DIV/0!	0	#DIV/0!	0	0	0	0	#DIV/0!
P8	#DIV/0!	0	#DIV/0!	0	0	0	0	#DIV/0!
P9	#DIV/0!	0	#DIV/0!	0	0	0	0	#DIV/0!
TOTAL	#DIV/0!	6	20	0	571	303	11	#DIV/0!

Wildlife

The deer population is the only major wildlife source considered. The same deer density is assumed for all subwatersheds.

Deer/sq mile	45
Deer/acre	0.0703125

This sheet contains information relevant to land application of waste produced by agricultural animals in the study area.

Application of hog manure, cattle manure, and poultry litter are considered.

The information is presented based on monthly variability of waste application.

It is assumed that cattle manure is applied to both Cropland and Pastureland using the same method.

Hog Manure Available for Wash-off

This is the percentage of manure applied by month.

	January	February	March	April	May	June	July	August	September	October	November	December
% of annual manure applied in month	0.05	0.05	0.05	0.14	0.14	0.08	0.08	0.08	0.12	0.12	0.05	0.04

The percent of manure available for runoff is dependent on the method of manure application. The percent available is computed below based on incorporation into soil. These are assumed values.

% available for runoff = (1 - % incorporated) + (% incorporated * 0.5)

	January	February	March	April	May	June	July	August	September	October	November	December
% Applied to Cropland:	0.6			0.00								
% Applied to Pastureland:							1.00					

The following is the resulting manure application based on the monthly percentage applied and incorporation into the soil.

Subwatershed	January	February	March	April	May	June	July	August	September	October	November	December
3170009006	0.03	0.03	0.03	0.084	0.084	0.048	0.048	0.048	0.072	0.072	0.03	0.024
3170009007	0.03	0.03	0.03	0.084	0.084	0.048	0.048	0.048	0.072	0.072	0.03	0.024
3170009008	0.03	0.03	0.03	0.084	0.084	0.048	0.048	0.048	0.072	0.072	0.03	0.024
3170009009	0.03	0.03	0.03	0.084	0.084	0.048	0.048	0.048	0.072	0.072	0.03	0.024
P5	0.03	0.03	0.03	0.084	0.084	0.048	0.048	0.048	0.072	0.072	0.03	0.024
P6	0.03	0.03	0.03	0.084	0.084	0.048	0.048	0.048	0.072	0.072	0.03	0.024
P7	0.03	0.03	0.03	0.084	0.084	0.048	0.048	0.048	0.072	0.072	0.03	0.024
P8	0.03	0.03	0.03	0.084	0.084	0.048	0.048	0.048	0.072	0.072	0.03	0.024
P9	0.03	0.03	0.03	0.084	0.084	0.048	0.048	0.048	0.072	0.072	0.03	0.024

Cattle Manure Available for Wash-off

This is the percentage of manure applied by month.

	January	February	March	April	May	June	July	August	September	October	November	December
% of annual manure applied in month	0	0	0	0.2	0.2	0.0666	0.0667	0.0667	0.2	0.2	0	0

The percent of manure available for runoff is dependent on the method of manure application. The percent available is computed below based on incorporation into soil. These are assumed values.

% available for runoff = (1 - % incorporated) + (% incorporated * 0.5)

	January	February	March	April	May	June	July	August	September	October	November	December
% Applied to Cropland:	0.625			0.00								
% Applied to Pastureland:							1.00					

The following is the resulting manure application based on the monthly percentage applied and incorporation into the soil.

Subwatershed	January	February	March	April	May	June	July	August	September	October	November	December
3170009006	0	0	0	0.125	0.125	0.041625	0.041688	0.041688	0.125	0.125	0	0
3170009007	0	0	0	0.125	0.125	0.041625	0.041688	0.041688	0.125	0.125	0	0
3170009008	0	0	0	0.125	0.125	0.041625	0.041688	0.041688	0.125	0.125	0	0
3170009009	0	0	0	0.125	0.125	0.041625	0.041688	0.041688	0.125	0.125	0	0
P5	0	0	0	0.125	0.125	0.041625	0.041688	0.041688	0.125	0.125	0	0
P6	0	0	0	0.125	0.125	0.041625	0.041688	0.041688	0.125	0.125	0	0
P7	0	0	0	0.125	0.125	0.041625	0.041688	0.041688	0.125	0.125	0	0
P8	0	0	0	0.125	0.125	0.041625	0.041688	0.041688	0.125	0.125	0	0
P9	0	0	0	0.125	0.125	0.041625	0.041688	0.041688	0.125	0.125	0	0

Poultry Litter Available for Wash-off

This is the percentage of manure applied by month.

	January	February	March	April	May	June	July	August	September	October	November	December
% of annual manure applied in month	0	0	0	0.143	0.143	0.143	0.143	0.143	0.143	0.142	0	0

The percent of manure available for runoff is dependent on the method of manure application. The percent available is computed below based on incorporation into soil. These are assumed values.

% available for runoff = (1 - % incorporated) + (% incorporated * 0.33)	% Applied to Cropland:	% Applied to Pastureland:
0.36	0.00	1.00

The following is the resulting manure application based on the monthly percentage applied and incorporation into the soil.

Subwatershed	January	February	March	April	May	June	July	August	September	October	November	December
3170009006	0	0	0	0.05148	0.05148	0.05148	0.05148	0.05148	0.05148	0.05112	0	0
3170009007	0	0	0	0.05148	0.05148	0.05148	0.05148	0.05148	0.05148	0.05112	0	0
3170009008	0	0	0	0.05148	0.05148	0.05148	0.05148	0.05148	0.05148	0.05112	0	0
3170009009	0	0	0	0.05148	0.05148	0.05148	0.05148	0.05148	0.05148	0.05112	0	0
P5	0	0	0	0.05148	0.05148	0.05148	0.05148	0.05148	0.05148	0.05112	0	0
P6	0	0	0	0.05148	0.05148	0.05148	0.05148	0.05148	0.05148	0.05112	0	0
P7	0	0	0	0.05148	0.05148	0.05148	0.05148	0.05148	0.05148	0.05112	0	0
P8	0	0	0	0.05148	0.05148	0.05148	0.05148	0.05148	0.05148	0.05112	0	0
P9	0	0	0	0.05148	0.05148	0.05148	0.05148	0.05148	0.05148	0.05112	0	0

This sheet contains information relevant to cattle farming in the study area.

Dairy Cattle

Dairy cattle are assumed to be either kept in feedlots or allowed to graze (depending on the milking/feeding schedule, which is four hours per day). When grazing, a certain percentage are assumed to have direct access to streams. Dairy cattle waste is therefore either applied as manure to Cropland and Pastureland, contributed directly to Pastureland, or contributed directly to streams (referred to as Cattle in Streams).

Beef Cattle

Beef cattle are assumed to be either kept in feedlots or allowed to graze (depending on the season). When grazing, a certain percentage are assumed to have direct access to streams. Beef cattle waste is therefore either applied as manure to Cropland and Pastureland, contributed directly to Pastureland, or contributed directly to streams (referred to as Cattle in Streams).

	Beef Cattle Grazing	Dairy Cattle Grazing	Assumed Cattle Access to Streams
Month	Percentage of Time not Confined (0.0 or 1.0)	Percentage of Time not Confined (0.0 or 1.0)	Percentage of Time (0.0 to 1.0)
January	1.00	0.84	0.05
February	1.00	0.84	0.05
March	1.00	0.84	0.05
April	1.00	0.84	0.05
May	1.00	0.84	0.05
June	1.00	0.84	0.05
July	1.00	0.84	0.05
August	1.00	0.84	0.05
September	1.00	0.84	0.05
October	1.00	0.84	0.05
November	1.00	0.84	0.05
December	1.00	0.84	0.05
	Total Beef Cattle Grazing Days	Total Dairy Cattle Grazing Days	
Month			
January	31	26.04	
February	28	23.52	
March	31	26.04	
April	30	25.2	
May	31	26.04	
June	30	25.2	
July	31	26.04	
August	31	26.04	
September	30	25.2	
October	31	26.04	
November	30	25.2	
December	31	26.04	
Total Grazing Days	365	306.6	

These data accessed from the following references are used in the remaining worksheets.

From ASAE

Animal	Total Manure prod (lb/day per 1,000 lb animal)	Typical Animal Mass (lb)	Manure prod per animal (lb/day)	Fecal Coliform (#/day E10 per 1,000 lb animal)	Fecal Coliform (#/day)	Manure prod (lb/yr)	Fecal Coliform (#/day)
Beef cow	40	794	32	13	1.03E+11	11587	5.71E+10
Dairy cow	86	1411	121	7.2	1.02E+11	44290	1.83E+11
Hog	84	134	11	8	1.08E+10	4123	1.08E+10
Sheep	40	60	2	20	1.19E+10	869	1.19E+10
Chicken	64	4	0	3.4	1.35E+08	93	1.35E+08
Broiler	85	2	0	3.4	6.75E+07	62	6.75E+07
Turkey	47	15	1	0.62	9.29E+07	257	9.29E+07
Duck	110	3	0	81	2.50E+09	124	2.50E+09

From Metcalf & Eddy

Estimated Fecal Coliform Production Rates by Animal

Animal	#/day	Reference
Cow	5.40E+09	Metcalf & Eddy, 1991 pg. 101
Hog	8.90E+09	Metcalf & Eddy, 1991
Sheep	1.80E+10	Metcalf & Eddy, 1991
Chicken	2.40E+08	Metcalf & Eddy, 1991
Turkey	1.30E+08	Metcalf & Eddy, 1991
Duck	1.10E+10	Metcalf & Eddy, 1991
Deer	5.00E+08	BPJ
Geese	4.90E+10	LIRPB, 1982

From: Horner, 1992

Fecal Coliform Loading Rates by Landuse

	median #/ha-y	#/acre/day
Road	1.80E+08	2.00E+05
Commercial	5.60E+09	6.21E+06
Single family low density	9.30E+09	1.03E+07
Single family high density	1.50E+10	1.66E+07
Multifamily residential	2.10E+10	2.33E+07

The deer population is the only wildlife considered as a fecal coliform contributor to the Forest.

FOREST LAND

All Months	AREA (AC)	#deer	Wildlife		TOTAL
			FC prod (#/day)	FC accum (#/acre/day)	FC accum (#/acre/day)
3170009006	1978	139.0767	6.95E+10	35156250	3.52E+07
3170009007	32	2.267367	1.13E+09	35156250	3.52E+07
3170009008	15559	1093.974	5.47E+11	35156250	3.52E+07
3170009009	46986	3303.674	1.65E+12	35156250	3.52E+07
P5	0	0	0.00E+00	0	0.00E+00
P6	0	0	0.00E+00	0	0.00E+00
P7	0	0	0.00E+00	0	0.00E+00
P8	0	0	0.00E+00	0	0.00E+00
P9	0	0	0.00E+00	0	0.00E+00
Total	64555				

Due to lack of animal counts, etc. for Built-up land, literature values are used.

A single, weighted Built-up loading value is quantified for each subwatershed based on individual built-up landuses present and their corresponding loading rates.

URBAN LAND

All Months	HIGH DENSITY	FC accum	NOTHING	FC accum	LOW DENSITY	FC accum	TRANSPORTATION	FC accum	TOTAL
	AREA (AC)	(#/acre/day)	AREA (AC)	(#/acre/day)	AREA (AC)	(#/acre/day)	AREA (AC)	(#/acre/day)	FC accum (#/acre/day)
3170009006	1	1.54E+07	0	0.00E+00	4	1.03E+07	3	2.00E+05	7.18E+06
3170009007	0	0.00E+00	0	0.00E+00	0	0.00E+00	0	0.00E+00	0.00E+00
3170009008	30	1.54E+07	0	0.00E+00	84	1.03E+07	73	2.00E+05	7.18E+06
3170009009	4	1.54E+07	0	0.00E+00	11	1.03E+07	10	2.00E+05	7.18E+06
P5	0	0.00E+00	0	0.00E+00	0	0.00E+00	0	0.00E+00	0.00E+00
P6	0	0.00E+00	0	0.00E+00	0	0.00E+00	0	0.00E+00	0.00E+00
P7	0	0.00E+00	0	0.00E+00	0	0.00E+00	0	0.00E+00	0.00E+00
P8	0	0.00E+00	0	0.00E+00	0	0.00E+00	0	0.00E+00	0.00E+00
P9	0	0.00E+00	0	0.00E+00	0	0.00E+00	0	0.00E+00	0.00E+00

This sheet contains information related to the contribution of failing septic systems to streams.

The direct contribution of fecal coliform from septic systems to a stream can be represented as a point source in the model. Required input for point sources in NPSM are loading rate (#/hr) and

The following assumptions are made for septic contributions.

Assume a failure rate for septic systems is 80 %

Assume the average FC concentration reaching the stream (from septic overcharge) is: 1.00E+04 #/100 ml (Horsely & Whitten, 1996)

Assume a typical septic overcharge flow rate of: 100 gal/day/person (Horsely & Whitten, 1996)

SEPTICS AS A POINT SOURCE

Subwatershed	Total # people served by septics	Total # people on failing tanks	Septic flow (gal/day)	Septic flow (mL/hr)	FC rate (#/hr)	Septic flow (cfs)
3170009006	299.538	239.6304	23963.04	3779171.1	3.78E+08	3.71E-02
3170009007	5.103	4.0824	408.24	64382.85	6.44E+06	6.33E-04
3170009008	1508.139	1206.5112	120651.12	19027687.05	1.90E+09	1.87E-01
3170009009	3883.276	3106.6208	310662.08	48993998.87	4.90E+09	4.82E-01
P5	0	0	0	0	0.00E+00	0.00E+00
P6	0	0	0	0	0.00E+00	0.00E+00
P7	0	0	0	0	0.00E+00	0.00E+00
P8	0	0	0	0	0.00E+00	0.00E+00
P9	0	0	0	0	0.00E+00	0.00E+00

POINT SOURCES FOR EACH SUBWATERSHED (Point Sources\Loads)

	Cattle in Streams		Septic Tanks		Dischargers		Fresh Water	Total	
	Flow (cfs)	Fecal (#/hr)	Flow (cfs)	Fecal (#/hr)	Flow (cfs)	Fecal (#/hr)	Flow (cfs)	Flow (cfs)	Fecal (#/hr)
3170009006	2.96E-06	1.13E+08	9.29E-03	9.45E+07	0.00E+00	0.00E+00	3.75E+00	3.76E+00	2.07E+08
3170009007	0.00E+00	0.00E+00	1.58E-04	1.61E+06	0.00E+00	0.00E+00	3.75E+00	3.75E+00	1.61E+06
3170009008	2.75E-05	1.05E+09	4.68E-02	4.76E+08	4.64E+00	9.45E+08	3.75E+00	8.44E+00	2.47E+09
3170009009	1.97E-05	7.53E+08	1.20E-01	1.22E+09	0.00E+00	0.00E+00	3.75E+00	3.87E+00	1.98E+09
P5	#DIV/0!	#DIV/0!	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	#DIV/0!	#DIV/0!
P6	#DIV/0!	#DIV/0!	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	#DIV/0!	#DIV/0!
P7	#DIV/0!	#DIV/0!	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	#DIV/0!	#DIV/0!
P8	#DIV/0!	#DIV/0!	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	#DIV/0!	#DIV/0!
P9	#DIV/0!	#DIV/0!	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	#DIV/0!	#DIV/0!

LANDUSE AREAS (for verification purposes only)

SUBSHED	CROPLAND	FOREST	URBAN	PASTURE	TOTAL
3170009006	3	1978	8	719	2708
3170009007	0	32	0	1	33
3170009008	111	15559	186	2313	18168
3170009009	120	46986	24	3225	50354
P5	0	0	0	0	0
P6	0	0	0	0	0
P7	0	0	0	0	0
P8	0	0	0	0	0
P9	0	0	0	0	0
TOTAL	234	64555	218	6258	71264

SCENARIOS

Source	% Reduced*
Cattle Access	70
Septic Failure	75
Pastureland	0

* Changing the % Reduced will change only the values on this sheet

Dischargers Effluent Concentration Level = A
(enter "E" to use the existing or "A" to use the allocated)

PASTURELAND AND CROPLAND - ACCUM (Data Editor\PERLND\PQAL\Monthly Input\MON-ACCUM)

Monthly Input - ACCUM in #acre/day

	3170009006		3170009007		3170009008		3170009009		P5	
	Pastureland	Cropland	Pastureland	Cropland	Pastureland	Cropland	Pastureland	Cropland	Pastureland	Cropland
January	2.74E+08	3.52E+07	3.52E+07	#DIV/0!	7.31E+08	3.52E+07	3.93E+08	3.52E+07	#DIV/0!	#DIV/0!
February	2.74E+08	3.52E+07	3.52E+07	#DIV/0!	7.31E+08	3.52E+07	3.94E+08	3.52E+07	#DIV/0!	#DIV/0!
March	2.74E+08	3.52E+07	3.52E+07	#DIV/0!	7.31E+08	3.52E+07	3.93E+08	3.52E+07	#DIV/0!	#DIV/0!
April	2.80E+08	3.52E+07	3.52E+07	#DIV/0!	7.42E+08	3.52E+07	4.05E+08	3.52E+07	#DIV/0!	#DIV/0!
May	2.80E+08	3.52E+07	3.52E+07	#DIV/0!	7.42E+08	3.52E+07	4.05E+08	3.52E+07	#DIV/0!	#DIV/0!
June	2.76E+08	3.52E+07	3.52E+07	#DIV/0!	7.35E+08	3.52E+07	3.97E+08	3.52E+07	#DIV/0!	#DIV/0!
July	2.76E+08	3.52E+07	3.52E+07	#DIV/0!	7.34E+08	3.52E+07	3.97E+08	3.52E+07	#DIV/0!	#DIV/0!
August	2.76E+08	3.52E+07	3.52E+07	#DIV/0!	7.34E+08	3.52E+07	3.97E+08	3.52E+07	#DIV/0!	#DIV/0!
September	2.80E+08	3.52E+07	3.52E+07	#DIV/0!	7.40E+08	3.52E+07	4.04E+08	3.52E+07	#DIV/0!	#DIV/0!
October	2.80E+08	3.52E+07	3.52E+07	#DIV/0!	7.40E+08	3.52E+07	4.03E+08	3.52E+07	#DIV/0!	#DIV/0!
November	2.74E+08	3.52E+07	3.52E+07	#DIV/0!	7.31E+08	3.52E+07	3.94E+08	3.52E+07	#DIV/0!	#DIV/0!
December	2.74E+08	3.52E+07	3.52E+07	#DIV/0!	7.30E+08	3.52E+07	3.93E+08	3.52E+07	#DIV/0!	#DIV/0!

	P6		P7		P8		P9	
	Pastureland	Cropland	Pastureland	Cropland	Pastureland	Cropland	Pastureland	Cropland
January	#DIV/0!	#DIV/0!	#DIV/0!	#DIV/0!	#DIV/0!	#DIV/0!	#DIV/0!	#DIV/0!
February	#DIV/0!	#DIV/0!	#DIV/0!	#DIV/0!	#DIV/0!	#DIV/0!	#DIV/0!	#DIV/0!
March	#DIV/0!	#DIV/0!	#DIV/0!	#DIV/0!	#DIV/0!	#DIV/0!	#DIV/0!	#DIV/0!
April	#DIV/0!	#DIV/0!	#DIV/0!	#DIV/0!	#DIV/0!	#DIV/0!	#DIV/0!	#DIV/0!
May	#DIV/0!	#DIV/0!	#DIV/0!	#DIV/0!	#DIV/0!	#DIV/0!	#DIV/0!	#DIV/0!
June	#DIV/0!	#DIV/0!	#DIV/0!	#DIV/0!	#DIV/0!	#DIV/0!	#DIV/0!	#DIV/0!
July	#DIV/0!	#DIV/0!	#DIV/0!	#DIV/0!	#DIV/0!	#DIV/0!	#DIV/0!	#DIV/0!
August	#DIV/0!	#DIV/0!	#DIV/0!	#DIV/0!	#DIV/0!	#DIV/0!	#DIV/0!	#DIV/0!
September	#DIV/0!	#DIV/0!	#DIV/0!	#DIV/0!	#DIV/0!	#DIV/0!	#DIV/0!	#DIV/0!
October	#DIV/0!	#DIV/0!	#DIV/0!	#DIV/0!	#DIV/0!	#DIV/0!	#DIV/0!	#DIV/0!
November	#DIV/0!	#DIV/0!	#DIV/0!	#DIV/0!	#DIV/0!	#DIV/0!	#DIV/0!	#DIV/0!
December	#DIV/0!	#DIV/0!	#DIV/0!	#DIV/0!	#DIV/0!	#DIV/0!	#DIV/0!	#DIV/0!

PASTURELAND AND CROPLAND - SQOLIM (Data Editor\PERLND\PQAL\Monthly Input\MON-SQOLIM)

Monthly Input - SQOLIM in #/acre

	3170009006		3170009007		3170009008		3170009009		P5	
	Pastureland	Cropland	Pastureland	Cropland	Pastureland	Cropland	Pastureland	Cropland	Pastureland	Cropland
January	1.10E+09	1.41E+08	1.41E+08	#DIV/0!	2.92E+09	1.41E+08	1.57E+09	1.41E+08	#DIV/0!	#DIV/0!
February	1.10E+09	1.41E+08	1.41E+08	#DIV/0!	2.93E+09	1.41E+08	1.58E+09	1.41E+08	#DIV/0!	#DIV/0!
March	1.10E+09	1.41E+08	1.41E+08	#DIV/0!	2.92E+09	1.41E+08	1.57E+09	1.41E+08	#DIV/0!	#DIV/0!
April	1.12E+09	1.41E+08	1.41E+08	#DIV/0!	2.97E+09	1.41E+08	1.62E+09	1.41E+08	#DIV/0!	#DIV/0!
May	1.12E+09	1.41E+08	1.41E+08	#DIV/0!	2.97E+09	1.41E+08	1.62E+09	1.41E+08	#DIV/0!	#DIV/0!
June	1.10E+09	1.41E+08	1.41E+08	#DIV/0!	2.94E+09	1.41E+08	1.59E+09	1.41E+08	#DIV/0!	#DIV/0!
July	1.10E+09	1.41E+08	1.41E+08	#DIV/0!	2.94E+09	1.41E+08	1.59E+09	1.41E+08	#DIV/0!	#DIV/0!
August	1.10E+09	1.41E+08	1.41E+08	#DIV/0!	2.94E+09	1.41E+08	1.59E+09	1.41E+08	#DIV/0!	#DIV/0!
September	1.12E+09	1.41E+08	1.41E+08	#DIV/0!	2.96E+09	1.41E+08	1.62E+09	1.41E+08	#DIV/0!	#DIV/0!
October	1.12E+09	1.41E+08	1.41E+08	#DIV/0!	2.96E+09	1.41E+08	1.61E+09	1.41E+08	#DIV/0!	#DIV/0!
November	1.10E+09	1.41E+08	1.41E+08	#DIV/0!	2.92E+09	1.41E+08	1.57E+09	1.41E+08	#DIV/0!	#DIV/0!
December	1.10E+09	1.41E+08	1.41E+08	#DIV/0!	2.92E+09	1.41E+08	1.57E+09	1.41E+08	#DIV/0!	#DIV/0!

	P6		P7		P8		P9	
	Pastureland	Cropland	Pastureland	Cropland	Pastureland	Cropland	Pastureland	Cropland
January	#DIV/0!	#DIV/0!	#DIV/0!	#DIV/0!	#DIV/0!	#DIV/0!	#DIV/0!	#DIV/0!
February	#DIV/0!	#DIV/0!	#DIV/0!	#DIV/0!	#DIV/0!	#DIV/0!	#DIV/0!	#DIV/0!
March	#DIV/0!	#DIV/0!	#DIV/0!	#DIV/0!	#DIV/0!	#DIV/0!	#DIV/0!	#DIV/0!
April	#DIV/0!	#DIV/0!	#DIV/0!	#DIV/0!	#DIV/0!	#DIV/0!	#DIV/0!	#DIV/0!
May	#DIV/0!	#DIV/0!	#DIV/0!	#DIV/0!	#DIV/0!	#DIV/0!	#DIV/0!	#DIV/0!
June	#DIV/0!	#DIV/0!	#DIV/0!	#DIV/0!	#DIV/0!	#DIV/0!	#DIV/0!	#DIV/0!
July	#DIV/0!	#DIV/0!	#DIV/0!	#DIV/0!	#DIV/0!	#DIV/0!	#DIV/0!	#DIV/0!
August	#DIV/0!	#DIV/0!	#DIV/0!	#DIV/0!	#DIV/0!	#DIV/0!	#DIV/0!	#DIV/0!
September	#DIV/0!	#DIV/0!	#DIV/0!	#DIV/0!	#DIV/0!	#DIV/0!	#DIV/0!	#DIV/0!
October	#DIV/0!	#DIV/0!	#DIV/0!	#DIV/0!	#DIV/0!	#DIV/0!	#DIV/0!	#DIV/0!
November	#DIV/0!	#DIV/0!	#DIV/0!	#DIV/0!	#DIV/0!	#DIV/0!	#DIV/0!	#DIV/0!
December	#DIV/0!	#DIV/0!	#DIV/0!	#DIV/0!	#DIV/0!	#DIV/0!	#DIV/0!	#DIV/0!

URBAN AND FOREST - ACQOP & SQOLIM (Data Editor\PERLND\PQAL\QUAL-INPUT\ACQOP & SQOLIM)

ACQOP for all months in #acre/day

	Urb & Bar	For & Wet
3170009006	7.18E+06	3.52E+07
3170009007	0.00E+00	3.52E+07
3170009008	7.18E+06	3.52E+07
3170009009	7.18E+06	3.52E+07
P5	0.00E+00	0.00E+00
P6	0.00E+00	0.00E+00
P7	0.00E+00	0.00E+00
P8	0.00E+00	0.00E+00
P9	0.00E+00	0.00E+00

SQOLIM for all months in #acre

	Urb & Bar	For & Wet
3170009006	2.87E+07	1.41E+08
3170009007	0.00E+00	1.41E+08
3170009008	2.87E+07	1.41E+08
3170009009	2.87E+07	1.41E+08
P5	0.00E+00	0.00E+00
P6	0.00E+00	0.00E+00
P7	0.00E+00	0.00E+00
P8	0.00E+00	0.00E+00
P9	0.00E+00	0.00E+00


APPENDIX B

This appendix contains printouts of the various model run results. Graph B-1 shows the modeled flow, in cubic feet per second, through the Tchoutacabouffa River compared to the most recent actual USGS gage readings from Tuxachanie Creek near Biloxi. USGS Gage 02480500 was discontinued in 1971. The remaining graphs represent an 11-year time period, from January 1, 1985, to December 31, 1995. The second set of graphs show the 30-day geometric mean for fecal coliform concentrations in counts per 100 ml in the Tchoutacabouffa River. The graphs contain a reference line at 200 counts per 100 ml. Graph B-2 represents the existing conditions in the Tchoutacabouffa River. There are 21 violations of the fecal coliform standard on this graph. Graphs B-3 and B-4 represent the conditions in the Tchoutacabouffa River after the reduction scenario has been applied. Graphs B-3 and B-4 show the fecal coliform concentration when the NPDES point source is discharging at its seasonal limits. Graph B-3 shows no exceedances during December through April when the permitted discharge is 2000 counts per 100 ml. Graph B-4 shows no exceedances during May through November when the permitted discharge is 200 counts per 100 ml. Graph B-3 may appear to show exceedances. However, all of these occur during May through November when the discharger would be at the 200 counts per 100 ml limit. Graphs B-2, B-3, and B-4 are shown with the same scale for comparison purposes.


The TMDL calculated in this report represents the maximum fecal coliform load that can be assimilated by the waterbody segment during the critical 30-day period that will maintain water quality standards. The calculation of this TMDL is based on the critical hydrologic flow condition that occurred during the modeled time span. The graph showing the 30-day geometric mean of instream fecal coliform concentrations representing the allocated loading scenario (Graph B-4) was used to identify the critical condition. The TMDL calculation includes the sum of the loads from all identified point and nonpoint sources applied or discharged within the modeled watershed.

An individual TMDL calculation was prepared for each waterbody segment and drainage area included in this report. The numerical values for the wasteload allocation (point sources) and load allocation (nonpoint sources) for each waterbody segment or drainage area can be found on the waterbody segment identification pages at the beginning of this report.


**Graph B-1 Daily Flow Comparison between USGS Gage 02480500
and Reach 03170009006 for 10/01/70 - 09/30/71**

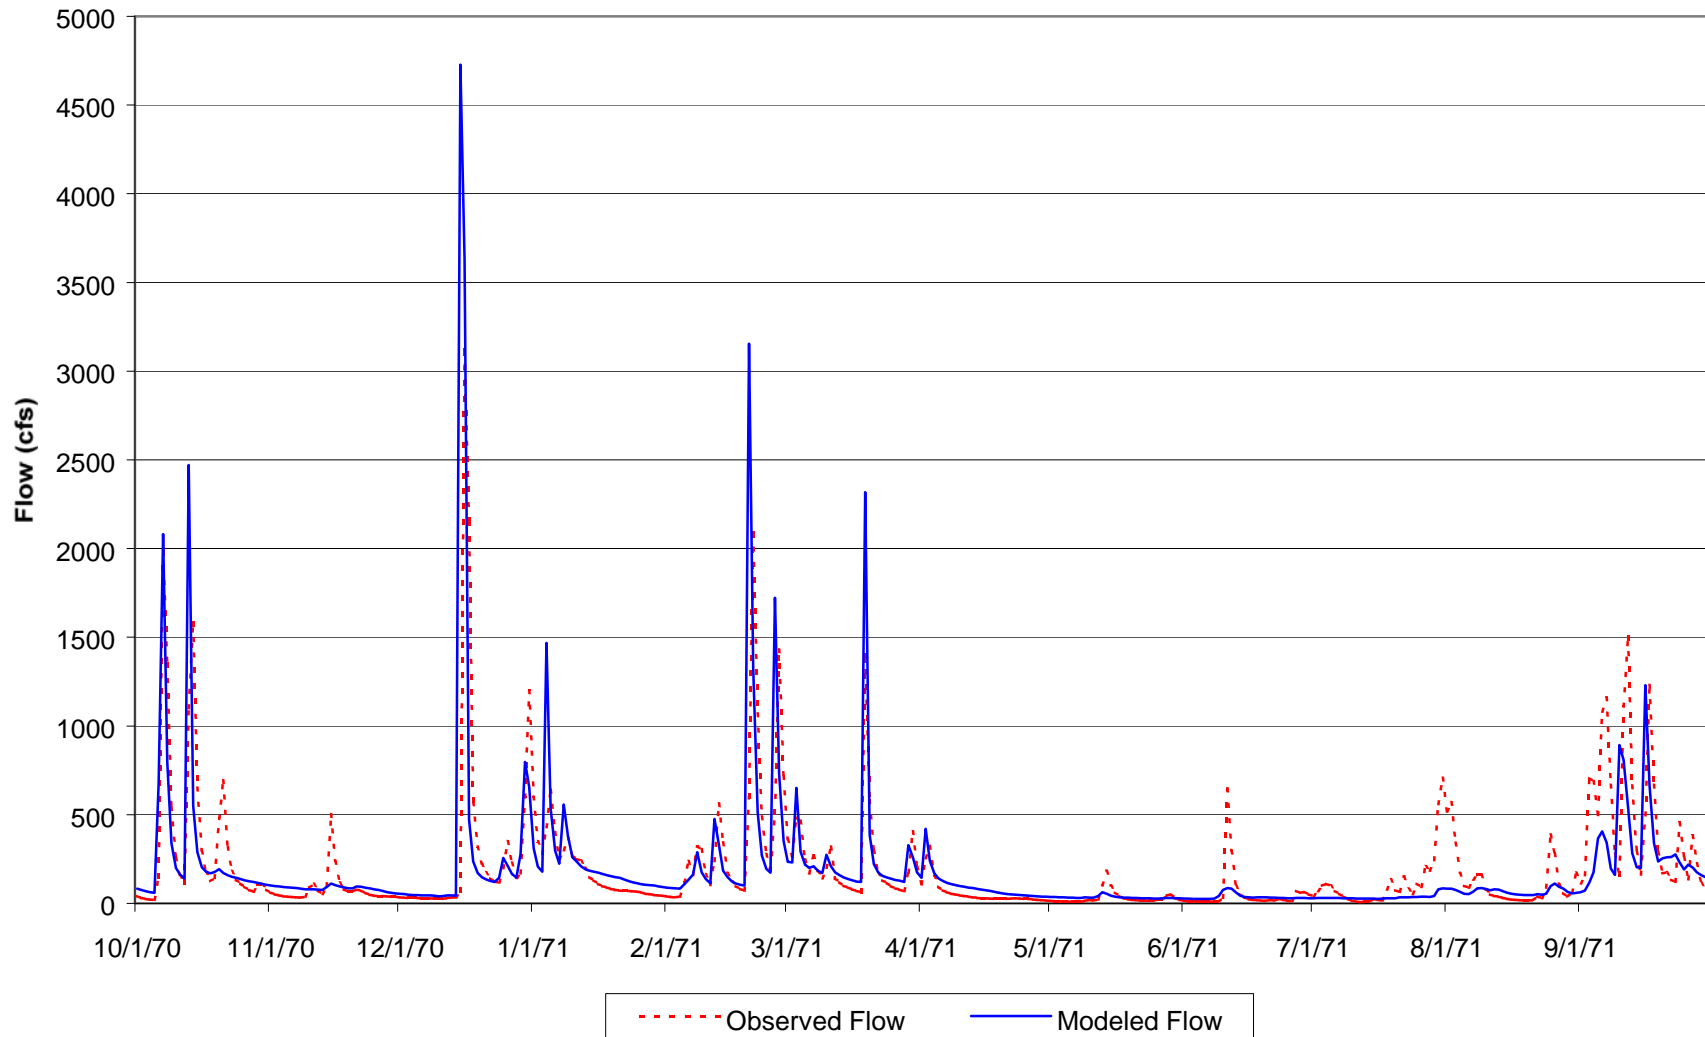


Graph B-2 Modeled Fecal Coliform Concentrations Under Existing Conditions

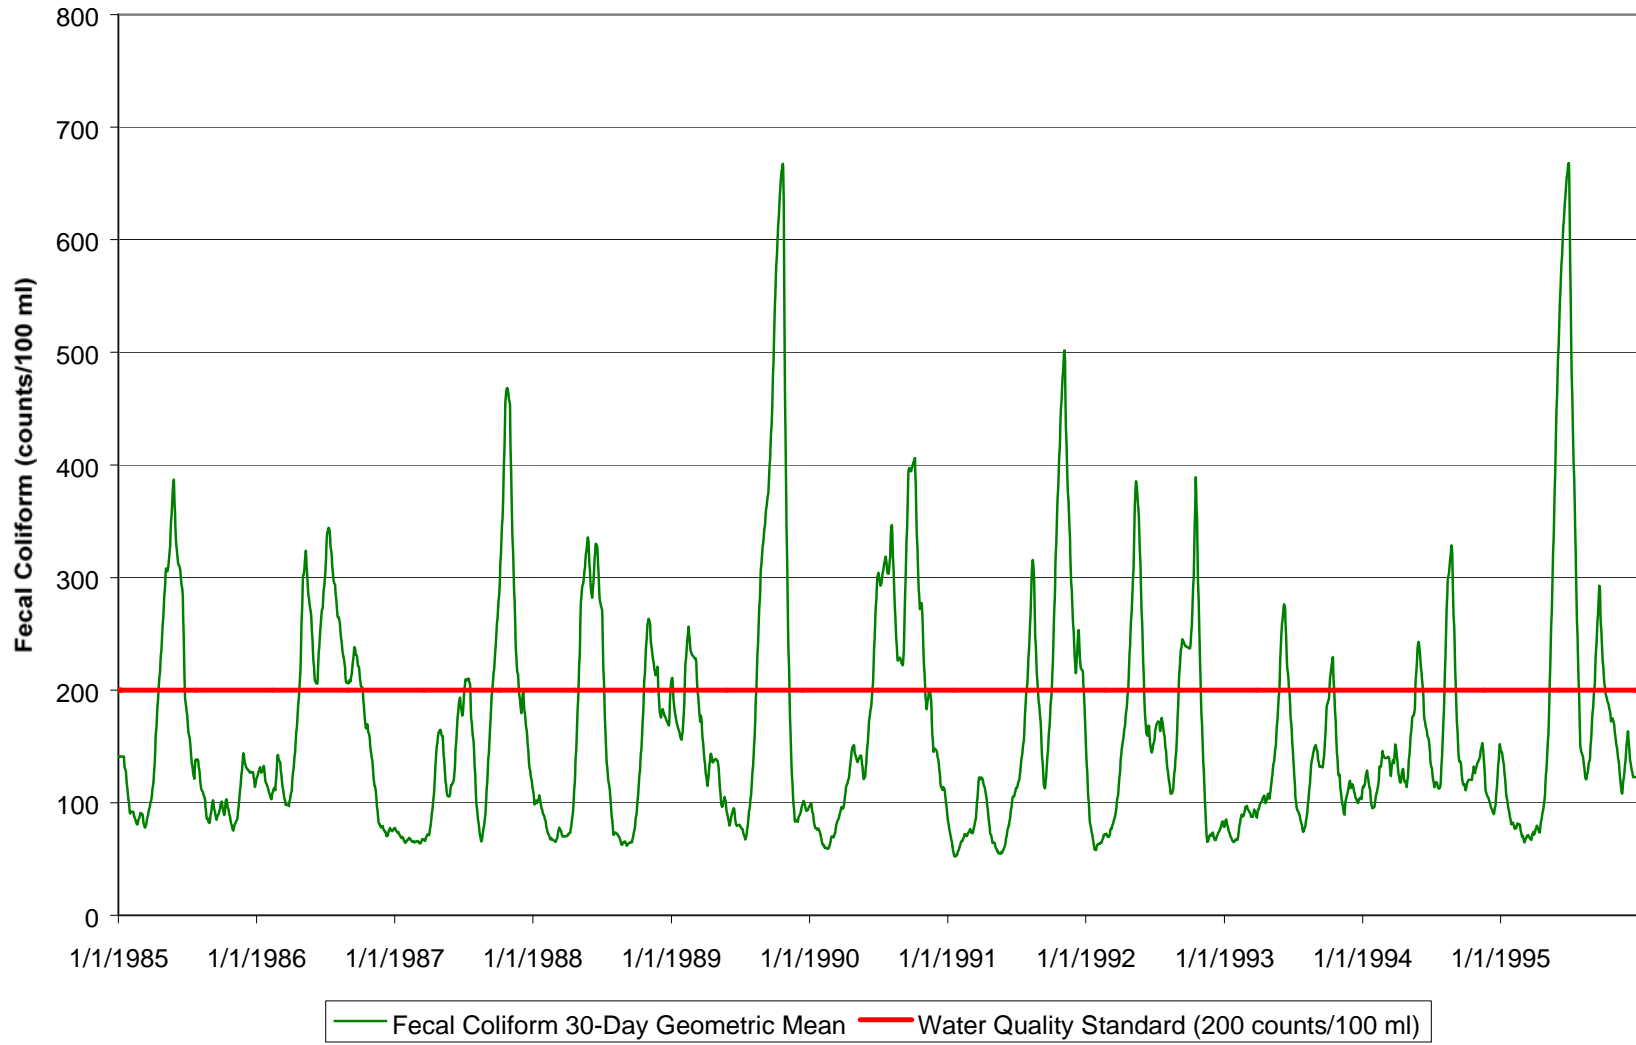

**Graph B-3 Modeled Fecal Coliform Concentrations After Application of Reduction Scenario
(NPDES Discharger = 2000 counts/100 ml)**

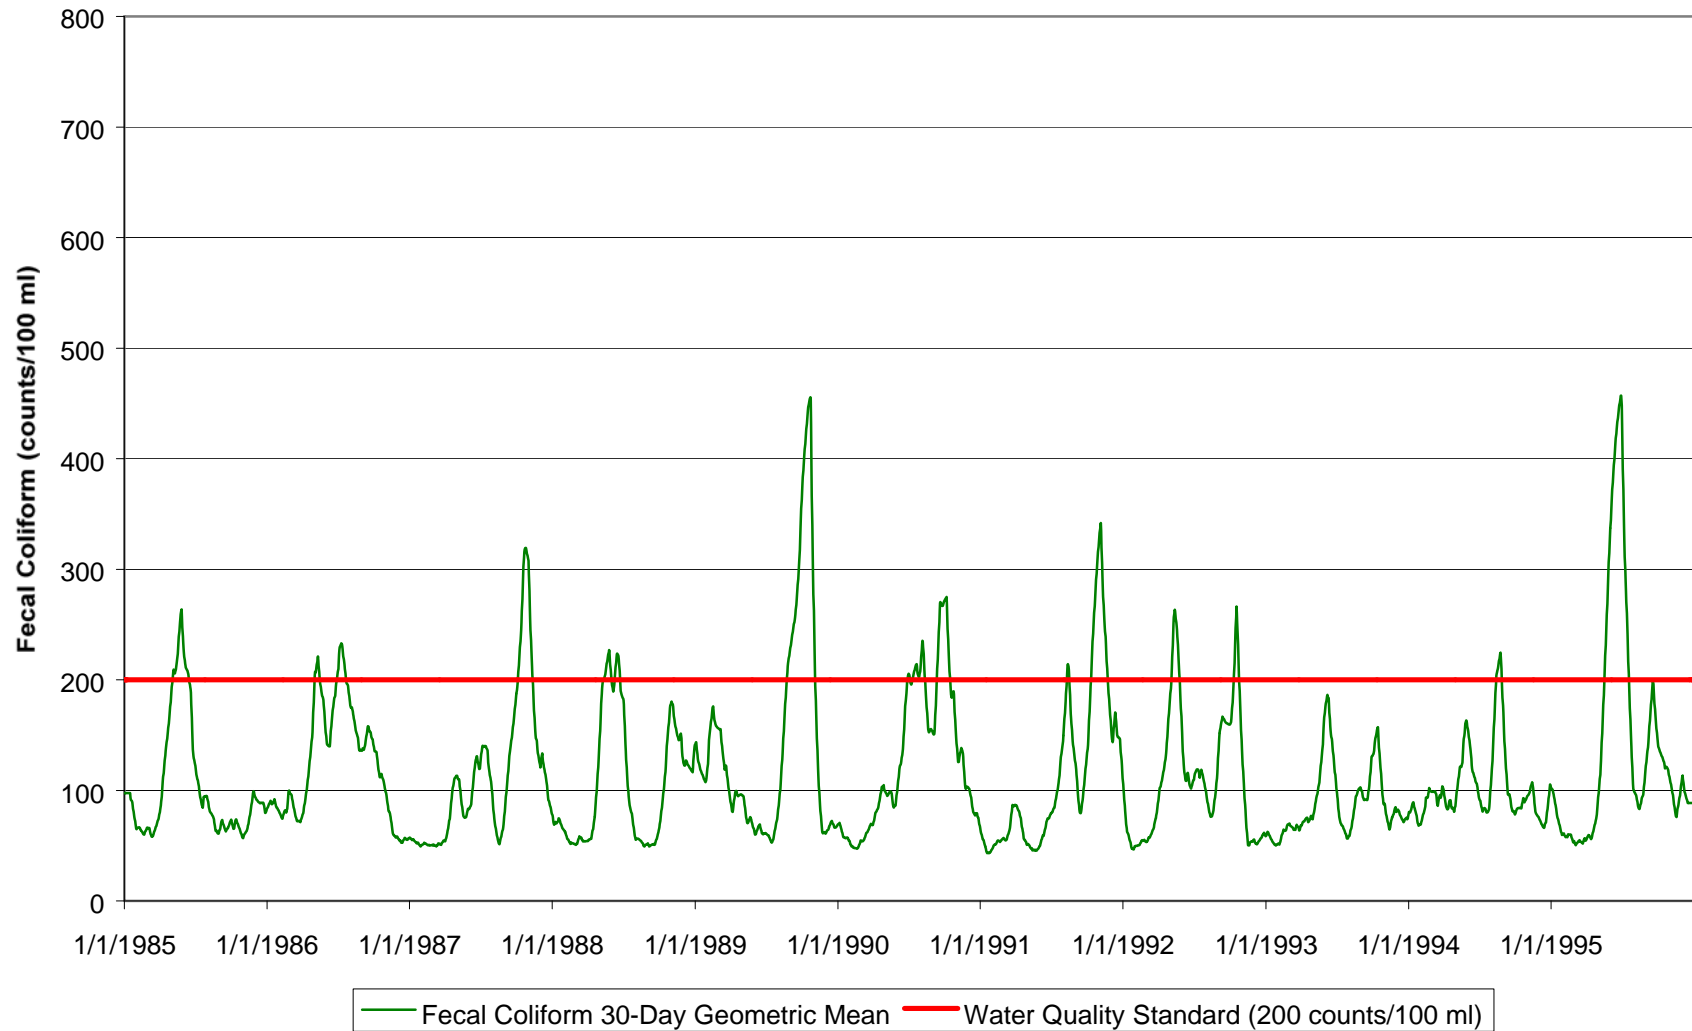

**Graph B-4 Modeled Fecal Coliform Concentrations After Application of Reduction Scenario
(NPDES Discharge = 200 counts/100 ml)**

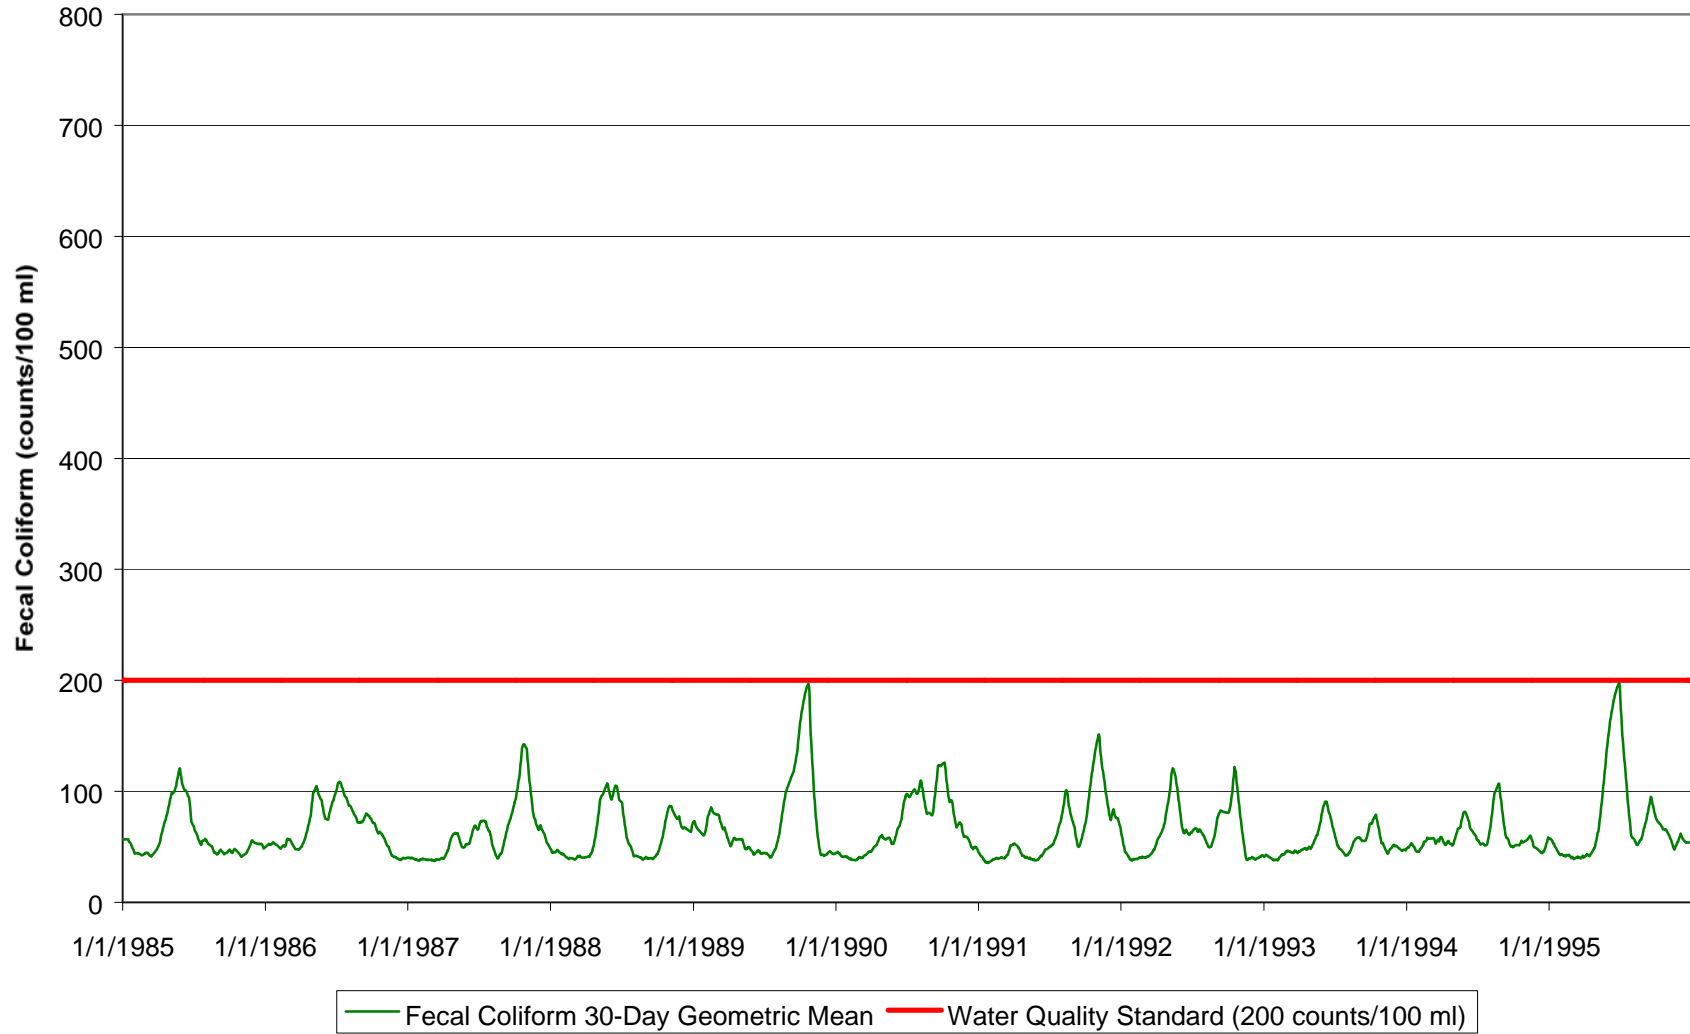

DEFINITIONS

Ambient stations: a network of fixed monitoring stations established for systematic water quality sampling at regular intervals, and for uniform parametric coverage over a long-term period.

Assimilative capacity: the capacity of a body of water or soil-plant system to receive wastewater effluents or sludge without violating the provisions of the State of Mississippi Water Quality Criteria for Intrastate, Interstate, and Coastal Waters and Water Quality regulations.

Background: the condition of waters in the absence of man-induced alterations based on the best scientific information available to MDEQ. The establishment of natural background for an altered waterbody may be based upon a similar, unaltered or least impaired, waterbody or on historical pre-alteration data.

Calibrated model: a model in which reaction rates and inputs are significantly based on actual measurements using data from surveys on the receiving waterbody.

Critical Condition: hydrologic and atmospheric conditions in which the pollutants causing impairment of a waterbody have their greatest potential for adverse effects.

Daily discharge: the "discharge of a pollutant" measured during a calendar day or any 24-hour period that reasonably represents the calendar day for purposes of sampling. For pollutants with limitations expressed in units of mass, the "daily discharge" is calculated as the total mass of the pollutant discharged over the day. For pollutants with limitations expressed in other units of measurement, the "daily average" is calculated as the average.

Designated Use: use specified in water quality standards for each waterbody or segment regardless of actual attainment.

Discharge monitoring report: report of effluent characteristics submitted by a NPDES Permitted facility.

Effluent standards and limitations: all State or Federal effluent standards and limitations on quantities, rates, and concentrations of chemical, physical, biological, and other constituents to which a waste or wastewater discharge may be subject under the Federal Act or the State law. This includes, but is not limited to, effluent limitations, standards of performance, toxic effluent standards and prohibitions, pretreatment standards, and schedules of compliance.

Effluent: treated wastewater flowing out of the treatment facilities.

Fecal coliform bacteria: a group of bacteria that normally live within the intestines of mammals, including humans. Fecal coliform bacteria are used as an indicator of the presence of pathogenic organisms in natural water.

Geometric mean: the n th root of the product of n numbers. A 30-day geometric mean is the 30th root of the product of 30 numbers.

Impaired Waterbody: any waterbody that does not attain water quality standards due to an individual pollutant, multiple pollutants, pollution, or an unknown cause of impairment.

Land Surface Runoff: water that flows into the receiving stream after application by rainfall or irrigation. It is a transport method for nonpoint source pollution from the land surface to the receiving stream.

Load allocation (LA): the portion of a receiving water's loading capacity attributed to or assigned to nonpoint sources (NPS) or background sources of a pollutant. The load allocation is the value assigned to the summation of all cattle and land applied fecal coliform that enter a receiving waterbody. It also contains a portion of the contribution from septic tanks.

Loading: the total amount of pollutants entering a stream from one or multiple sources.

Nonpoint Source: pollution that is in runoff from the land. Rainfall, snowmelt, and other water that does not evaporate become surface runoff and either drains into surface waters or soaks into the soil and finds its way into groundwater. This surface water may contain pollutants that come from land use activities such as agriculture; construction; silviculture; surface mining; disposal of wastewater; hydrologic modifications; and urban development.

NPDES permit: an individual or general permit issued by the Mississippi Environmental Quality Permit Board pursuant to regulations adopted by the Mississippi Commission on Environmental Quality under Mississippi Code Annotated (as amended) §§ 49-17-17 and 49-17-29 for discharges into State waters.

Point Source: pollution loads discharged at a specific location from pipes, outfalls, and conveyance channels from either wastewater treatment plants or industrial waste treatment facilities. Point sources can also include pollutant loads contributed by tributaries to the main receiving stream.

Pollution: contamination, or other alteration of the physical, chemical, or biological properties, of any waters of the State, including change in temperature, taste, color, turbidity, or odor of the waters, or such discharge of any liquid, gaseous, solid, radioactive, or other substance, or leak into any waters of the State, unless in compliance with a valid permit issued by the Permit Board.

Publicly Owned Treatment Works (POTW): a waste treatment facility owned and/or operated by a public body or a privately owned treatment works which accepts discharges which would otherwise be subject to Federal Pretreatment Requirements.

Scientific Notation (Exponential Notation): mathematical method in which very large numbers or very small numbers are expressed in a more concise form. The notation is based on powers of ten. Numbers in scientific notation are expressed as the following: $4.16 \times 10^{(+b)}$ and $4.16 \times 10^{(-b)}$ [same as $4.16E4$ or $4.16E-4$]. In this case, b is always a positive, real number. The $10^{(+b)}$ tells us that the decimal point is b places to the right of where it is shown. The $10^{(-b)}$ tells us that the decimal point is b places to the left of where it is shown.

For example: $2.7 \times 10^4 = 2.7E+4 = 27000$ and $2.7 \times 10^{-4} = 2.7E-4 = 0.00027$.

Sigma (Σ): shorthand way to express taking the sum of a series of numbers. For example, the sum or total of three amounts 24, 123, 16, (d_1 , d_2 , d_3) respectively could be shown as:

$$\begin{array}{l} 3 \\ \Sigma d_i = d_1 + d_2 + d_3 = 24 + 123 + 16 = 163 \\ i=1 \end{array}$$

Total Maximum Daily Load or TMDL: the calculated maximum permissible pollutant loading to a waterbody at which water quality standards can be maintained.

Regression Coefficient: an expression of the functional relationship between two correlated variables that is often empirically determined from data, and is used to predict values of one variable when given values of the other variable.

Waste: sewage, industrial wastes, oil field wastes, and all other liquid, gaseous, solid, radioactive, or other substances which may pollute or tend to pollute any waters of the State.

Wasteload allocation (WLA): the portion of a receiving water's loading capacity attributed to or assigned to point sources of a pollutant. It also contains a portion of the contribution from septic tanks

Water Quality Standards: the criteria and requirements set forth in *State of Mississippi Water Quality Criteria for Intrastate, Interstate, and Coastal Waters*. Water quality standards are standards composed of designated present and future most beneficial uses (classification of waters), the numerical and narrative criteria applied to the specific water uses or classification, and the Mississippi antidegradation policy.

Water quality criteria: elements of State water quality standards, expressed as constituent concentrations, levels, or narrative statements, representing a quality of water that supports the present and future most beneficial uses.

Waters of the State: all waters within the jurisdiction of this State, including all streams, lakes, ponds, wetlands, impounding reservoirs, marshes, watercourses, waterways, wells, springs, irrigation systems, drainage systems, and all other bodies or accumulations of water, surface and underground, natural or artificial, situated wholly or partly within or bordering upon the State, and such coastal waters as are within the jurisdiction of the State, except lakes, ponds, or other surface waters which are wholly landlocked and privately owned, and which are not regulated under the Federal Clean Water Act (33 U.S.C.1251 et seq.).

Watershed: the area of land draining into a stream at a given location.

ABBREVIATIONS

7Q10.....	Seven-Day Average Low Stream Flow with a Ten-Year Occurrence Period
BASINS	Better Assessment Science Integrating Point and Nonpoint Sources
BMP	Best Management Practice
CWA	Clean Water Act
DMR	Discharge Monitoring Report
EPA.....	Environmental Protection Agency
GIS	Geographic Information System
HUC	Hydrologic Unit Code
LA	Load Allocation
MARIS.....	State of Mississippi Automated Information System
MDEQ.....	Mississippi Department of Environmental Quality
MOS.....	Margin of Safety
NRCS	National Resource Conservation Service
NPDES.....	National Pollution Discharge Elimination System
NPSM.....	Nonpoint Source Model
RF3.....	Reach File 3
USGS	United States Geological Survey
WLA	Waste Load Allocation

REFERENCES

Horner, 1992. Water Quality Criteria/Pollutant Loading Estimation/Treatment Effectiveness Estimation. In R.W. Beck and Associates. Covington Master Drainage Plan. King County Surface Water Management Division, Seattle, WA.

Horsley & Whitten, Inc. 1996. Identification and Evaluation of Nutrient Bacterial Loadings to Maquoit Bay, Brunswick, and Freeport, Maine. Casco Bay Estuary Project.

Metccalf and Eddy. 1991. *Wastewater Engineering: Treatment, Disposal, Reuse*. 3rd Edition. McGraw-Hill, Inc., New York.

MDEQ. 1994. *Wastewater Regulations for National Pollutant Discharge Elimination System (NPDES) Permits, Underground Injection Control (UIC) Permits, State Permits, Water Quality Based Effluent Limitations and Water Quality Certification*. Office of Pollution Control.

MDEQ. 1995. *State of Mississippi Water Quality Criteria for Intrastate, Interstate, and Coastal Waters*. Office of Pollution Control.

MDEQ. 1998. *Mississippi List of Waterbodies, Pursuant to Section 303(d) of the Clean Water Act*. Office of Pollution Control.

USEPA. 1998. *Better Assessment Science Integrating Point and Nonpoint Sources, BASINS, Version 2.0 User's Manual*. U.S. Environmental Protection Agency, Office of Water, Washington, D.C.

