

Total Maximum Daily Load Biological Impairment Due to Nutrients and Organic Enrichment / Low Dissolved Oxygen For Woodward Creek

Tombigbee River Basin

Noxubee County, Mississippi


Prepared By

Mississippi Department of
Environmental Quality
Office of Pollution Control
TMDL/WLA Branch

MDEQ
PO Box 10385
Jackson, MS 39289-0385
(601) 961-5171
www.deq.state.ms.us



Mississippi Department of
Environmental Quality

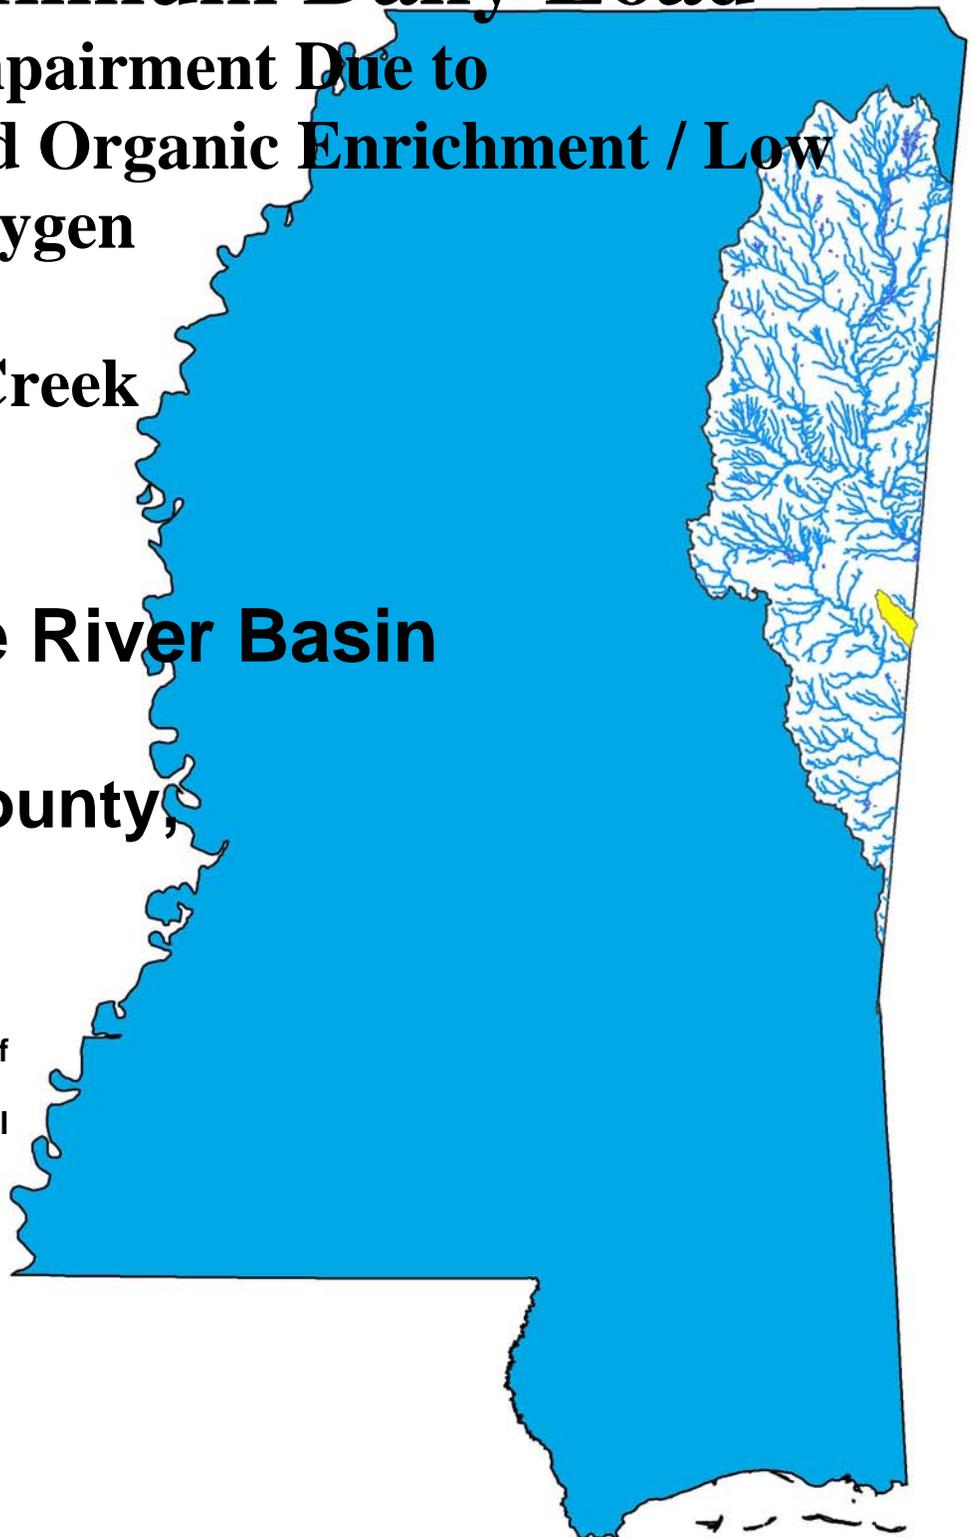

FOREWORD

This report has been prepared in accordance with the schedule contained within the federal consent decree dated December 22, 1998. The report contains one or more Total Maximum Daily Loads (TMDLs) for water body segments found on Mississippi's 1996 Section 303(d) List of Impaired Water bodies. Because of the accelerated schedule required by the consent decree, many of these TMDLs have been prepared out of sequence with the State's rotating basin approach. The implementation of the TMDLs contained herein will be prioritized within Mississippi's rotating basin approach.

The amount and quality of the data on which this report is based are limited. As additional information becomes available, the TMDLs may be updated. Such additional information may include water quality and quantity data, changes in pollutant loadings, or changes in landuse within the watershed. In some cases, additional water quality data may indicate that no impairment exists.

Conversion Factors

| To convert from | To | Multiply by | To convert from | To | Multiply by |
|-------------------|-----------------|-------------|-----------------|-----------------|-------------|
| mile ² | acre | 640 | acre | ft ² | 43560 |
| km ² | acre | 247.1 | days | seconds | 86400 |
| m ³ | ft ³ | 35.3 | meters | feet | 3.28 |
| ft ³ | gallons | 7.48 | ft ³ | gallons | 7.48 |
| ft ³ | liters | 28.3 | hectares | acres | 2.47 |
| cfs | gal/min | 448.8 | miles | meters | 1609.3 |
| cfs | MGD | 0.646 | tonnes | tons | 1.1 |
| m ³ | gallons | 264.2 | µg/l * cfs | gm/day | 2.45 |
| m ³ | liters | 1000 | µg/l * MGD | gm/day | 3.79 |

| Fraction | Prefix | Symbol | Multiple | Prefix | Symbol |
|-------------------|--------|--------|------------------|--------|--------|
| 10 ⁻¹ | deci | d | 10 | deka | da |
| 10 ⁻² | centi | c | 10 ² | hecto | h |
| 10 ⁻³ | milli | m | 10 ³ | kilo | k |
| 10 ⁻⁶ | micro | : | 10 ⁶ | mega | M |
| 10 ⁻⁹ | nano | n | 10 ⁹ | giga | G |
| 10 ⁻¹² | pico | p | 10 ¹² | tera | T |
| 10 ⁻¹⁵ | femto | f | 10 ¹⁵ | peta | P |
| 10 ⁻¹⁸ | atto | a | 10 ¹⁸ | exa | E |

TABLE OF CONTENTS

| | |
|--|----|
| TMDL INFORMATION PAGE..... | 4 |
| EXECUTIVE SUMMARY | 5 |
| INTRODUCTION | 6 |
| 1.1 Background..... | 6 |
| 1.2 Stressor Identification..... | 7 |
| 1.3 Applicable Water Body Segment Use | 7 |
| 1.4 Applicable Water Body Segment Standard | 7 |
| 1.5 Nutrient Target Development | 8 |
| WATER BODY ASSESSMENT | 9 |
| 2.1 Woodward Creek Water Quality Data..... | 9 |
| 2.2 Assessment of Point Sources | 10 |
| 2.3 Assessment of Non-Point Sources..... | 10 |
| 2.4 Estimated Existing Load for Total Nitrogen..... | 11 |
| 2.5 Estimated Existing Load for Total Phosphorus | 12 |
| ALLOCATION..... | 13 |
| 3.1 Wasteload Allocation..... | 13 |
| 3.2 Load Allocation | 13 |
| 3.3 Incorporation of a Margin of Safety | 13 |
| 3.4 Calculation of the TMDL..... | 13 |
| 3.5 Seasonality and Critical Condition | 14 |
| CONCLUSION..... | 15 |
| 4.1 Public Participation..... | 15 |
| REFERENCES | 16 |

FIGURES

| | |
|---|----|
| Figure 1. Woodward Creek..... | 5 |
| Figure 2. Woodward Creek §303(d) Segment | 6 |
| Figure 3. Woodward Creek Water Quality Monitoring Stations..... | 9 |
| Figure 4. Landuse in Woodward Creek Watershed..... | 11 |

TABLES

| | |
|---|----|
| Table 1. Listing Information..... | 4 |
| Table 2. Water Quality Standards..... | 4 |
| Table 3. Total Maximum Daily Load for Nutrients..... | 4 |
| Table 4. Woodward Creek Nutrient Data, IBI Station 286..... | 9 |
| Table 5. Nutrient Loadings for Various Land Uses..... | 10 |
| Table 6. Landuse Distribution for Woodward Creek Watershed | 11 |
| Table 7. Estimated Existing Total Nitrogen Load for Woodward Creek | 12 |
| Table 8. Estimated Existing Total Phosphorus Load for Woodward Creek..... | 12 |
| Table 9. TN, TP and TBOD Total Maximum Daily Load based on Ecoregion Range..... | 14 |

TMDL INFORMATION PAGE

Table 1. Listing Information

| Name | ID | County | HUC | Cause | Stressors |
|--|--------|---------|----------|-----------------------|---|
| Woodward Creek | MS043E | Noxubee | 03160108 | Biological Impairment | Nutrients and Organic Enrichment / Low Dissolved Oxygen |
| Location: Near Cooksville from headwaters to Alabama | | | | | |

Table 2. Water Quality Standards

| Parameter | Beneficial use | Water Quality Criteria |
|-------------------------|----------------------|---|
| Nutrients | Aquatic Life Support | Waters shall be free from materials attributable to municipal, industrial, agricultural, or other dischargers producing color, odor, taste, total suspended solids, or other conditions in such degree as to create a nuisance, render the waters injurious to public health, recreation, or to aquatic life and wildlife, or adversely affect the palatability of fish, aesthetic quality, or impair the waters for any designated uses. |
| Dissolved Oxygen | Aquatic Life Support | DO concentrations shall be maintained at a daily average of not less than 5.0 mg/l with an instantaneous minimum of not less than 4.0 mg/l |

Table 3. Total Maximum Daily Load for Nutrients

| Stream Name | | WLA lbs/day | LA lbs/day | MOS | TMDL lbs/day |
|-------------|------|----------------|---------------|----------|-----------------|
| Woodward | TN | 0.0 | 207.1 – 241.7 | Implicit | 207.1 – 241.7 |
| | TP | 0.0 | 20.7 – 34.5 | Implicit | 20.7 – 34.5 |
| | TBOD | 0 | 0 | Implicit | 0 |

EXECUTIVE SUMMARY

This TMDL has been developed for Woodward Creek which was placed on the Mississippi 1996 Section 303(d) List of Impaired Water Bodies due to evaluated causes of pesticides, siltation, nutrients and organic enrichment/low dissolved oxygen. MDEQ completed biological monitoring on Woodward Creek, which indicated biological impairment. It was determined that nutrients and organic enrichment / low dissolved oxygen are probable primary stressors. This TMDL will provide an estimate of the total nitrogen (TN) and total phosphorus (TP) allowable in the stream.

Mississippi does not have water quality standards for allowable nutrient concentrations. MDEQ currently has a Nutrient Task Force (NTF) working on the development of criteria for nutrients. An annual concentration range of 0.6 to 0.7 mg/l is an applicable target for TN and 0.06 to 0.10 mg/l for TP for water bodies located in Ecoregion 65. MDEQ is presenting these ranges as preliminary target values for TMDL development which is subject to revision after the development of numeric nutrient criteria.

The Woodward Creek Watershed is located in HUC 03160108 near Cooksville in Noxubee County. Woodward Creek flows for 7.3 miles in a southeast direction from its intermittent headwaters to the point at which it crosses the Alabama state line.

Because the critical 7Q10 flow of Woodward Creek is zero, a predictive model was not needed to determine that this stream is not an appropriate receiving water body for waste water effluent. Therefore, the TBODu TMDL was set to zero. The limited total nutrient data and estimated ecoregion concentrations indicate reductions of nutrients are needed.



Figure 1. Woodward Creek

INTRODUCTION

1.1 Background

The identification of water bodies not meeting their designated use and the development of total maximum daily loads (TMDLs) for those water bodies are required by Section 303(d) of the Clean Water Act and the Environmental Protection Agency's (EPA) Water Quality Planning and Management Regulations (40 CFR part 130). The TMDL process is designed to restore and maintain the quality of those impaired water bodies through the establishment of pollutant specific allowable loads. This TMDL has been developed for the 2004 §303(d) listed segment shown in Figure 2.

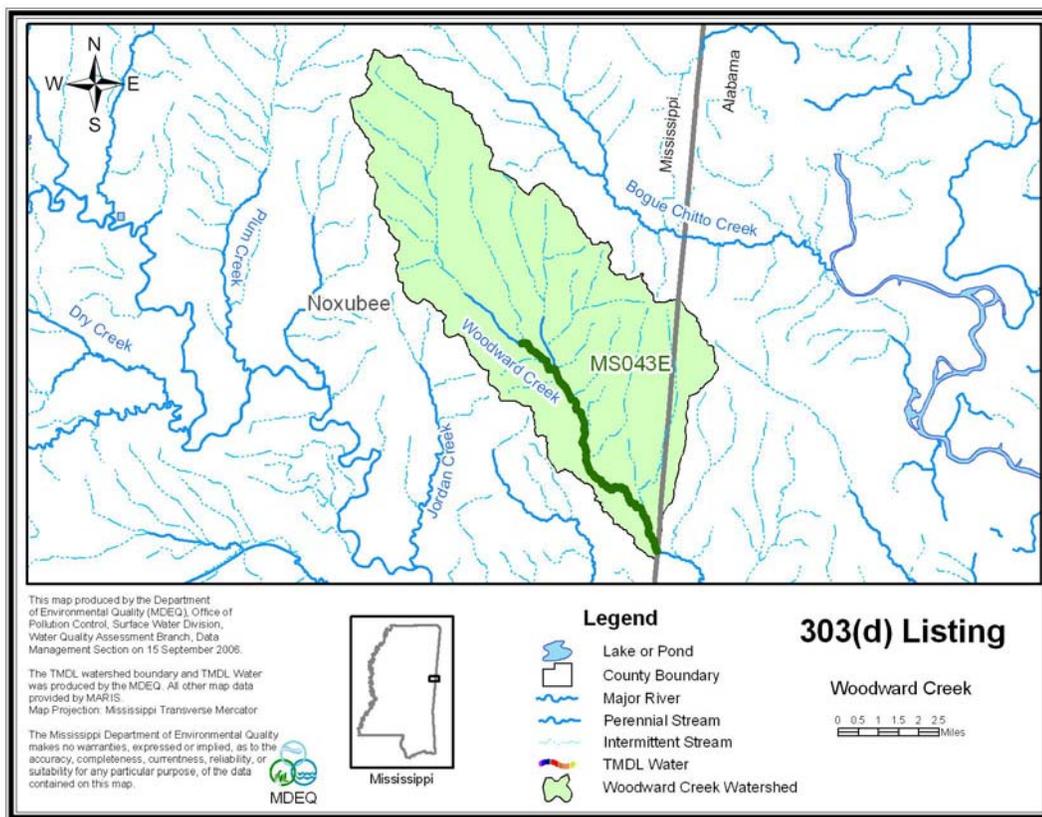


Figure 2. Woodward Creek §303(d) Segment

The original listing was for the Woodward Creek drainage area. In 1998, MDEQ changed the practice of listing drainage areas. There were no monitoring data, so the stream remained on the evaluated portion of Mississippi's §303(d) list. MDEQ began a biological monitoring program, the M-BISQ, to monitor this and other evaluated streams to confirm water quality based on the health of the biology in the stream. Woodward Creek was confirmed as impaired based on the biology.

1.2 Stressor Identification

The impaired segment was listed due to failure to meet minimum water quality criteria for aquatic use support based on biological sampling (MDEQ, 2003). Because of these results, a detailed assessment of the watershed and potential pollutant sources, called a stressor identification report, was developed for each stream. The purpose of the stressor identification process is to identify the stressors and their sources most likely causing degradation of instream biological conditions. The results indicate that nutrients and organic enrichment were probable primary stressors for Woodward Creek (MDEQ, 2006).

There are no state criteria in Mississippi for nutrients. These criteria are currently being developed by the Mississippi Nutrient Task Force in coordination with EPA Region 4. MDEQ proposed a work plan for nutrient criteria development that has been approved by EPA and is on schedule according to the approved plan in development of nutrient criteria (MDEQ, 2004). Data were collected for wadeable streams to calculate the nutrient criteria.

For this TMDL, MDEQ is presenting preliminary target ranges for TN and TP. The limited data available are greater than these ranges for TN and TP. An annual concentration range of 0.6 to 0.7 mg/l is an applicable target for TN and 0.06 to 0.10 mg/l for TP for water bodies located in Ecoregion 65. However, MDEQ is presenting these ranges as preliminary target values for TMDL development which is subject to revision after the development of nutrient criteria, when the work of the NTF is complete.

1.3 Applicable Water Body Segment Use

The water use classifications are established by the State of Mississippi in the document *State of Mississippi Water Quality Criteria for Intrastate, Interstate, and Coastal Waters* (MDEQ, 2003). The designated beneficial use for the listed segments is fish and wildlife.

1.4 Applicable Water Body Segment Standard

The water quality standard applicable to the use of the water body and the pollutant of concern is defined in the *State of Mississippi Water Quality Criteria for Intrastate, Interstate, and Coastal Waters* (MDEQ, 2003).

Mississippi's current standards contain a narrative criteria that can be applied to nutrients which states "*Waters shall be free from materials attributable to municipal, industrial, agricultural, or other discharges producing color, odor, taste, total suspended or dissolved solids, sediment, turbidity, or other conditions in such degree as to create a nuisance, render the waters injurious to public health, recreation, or to aquatic life and wildlife, or adversely affect the palatability of fish, aesthetic quality, or impair the waters for any designated use* (MDEQ, 2002)." In the 1999 Protocol for Developing Nutrient TMDLs, EPA suggests several methods for the development of numeric criteria for nutrients (USEPA, 1999). In accordance with the 1999 Protocol, "The target value for the chosen indicator can be based on: comparison to similar but unimpaired waters; user surveys; empirical data summarized in classification systems; literature values; or professional judgment." MDEQ believes the most economical and scientifically defensible method for use in Mississippi is a comparison between similar but unimpaired waters within the

same region. This method is dependent on adequate data which are being collected in accordance with the EPA approved plan. The initial phase of the data collection process for wadeable streams is complete.

1.5 Nutrient Target Development

Nutrient data were collected quarterly at 99 discrete sampling stations state wide where biological data already existed. These stations were identified and used to represent a range of stream reaches according to biological health status, geographic location (selected to account for ecoregion, bioregion, basin and geologic variability) and streams that potentially receive non-point source pollution from urban, agricultural, and silviculture lands as well as point source pollution from NPDES permitted facilities.

Nutrient concentration data were not normally distributed; therefore, data were log transformed for statistical analyses. Data were evaluated for distinct patterns of various data groupings (stratification) according to natural variability. Only stations that were characterized as “least disturbed” through a defined process in the M-BISQ process (M-BISQ 2003) or stations that resulted in a biological impairment rating of “fully attaining” were used to evaluate natural variability of the data set. Each of these two groups was evaluated separately (“least disturbed sites” and “fully attaining sites). Some stations were used in both sets, in other words, they were considered “least disturbed” and “fully attaining”. The number of stations considered “least disturbed” was 30 of 99, and the number of stations considered “fully attaining” was 53 of 99.

Several analysis techniques were used to evaluate nutrient data. Graphical analyses were used as the primary evaluation tool. Specific analyses used included; scatter plots, box plots, Pearson’s correlation, and general descriptive statistics.

In general, natural nutrient variability was not apparent based on box plot analyses according to the 4 stratification scenarios. Bioregions were selected as the stratification scheme to use for TMDLs in the Pascagoula Basin. However, this was not appropriate for some water bodies in smaller bioregions. Therefore, MDEQ now uses ecoregions as a stratification scheme for the water bodies in the remainder of the state.

In order to use the data set to determine possible nutrient thresholds, nutrient concentrations were evaluated as to their correlation with biological metrics. That thorough evaluation was completed prior to the Pascagoula River Basin TMDLs. The methodology and approach were verified. The same methodology was applied to the subsequent bioregions and ecoregions.

For the preliminary target concentration range per each ecoregion, the 75th and 90th percentiles were derived from the mean nutrient value at each site found to be fully supporting of aquatic life support according to the M-BISQ scores. For the estimate of the existing concentrations the 50th percentile (median) was derived for station mean value at each of the sites that were not attaining and had nutrient concentrations greater than the target.

WATER BODY ASSESSMENT

2.1 Woodward Creek Water Quality Data

Nutrient data for the Woodward Creek Watershed were gathered and reviewed. The data are given in Table 4. Data exist for the §303(d)-listed segment of Woodward Creek based on samples collected during the §303(d)/M-BISQ monitoring project at site #286. The location of MBISQ Station is shown in Figure 3.

Table 4. Woodward Creek Nutrient Data, IBI Station 286

| Date | Time | TN (mg/l) | TP (mg/l) |
|---------|-------|-----------|-----------|
| 02/1/01 | 12:51 | 0.82 | 0.11 |
| 1/31/02 | 11:40 | 2.69 | 0.11 |

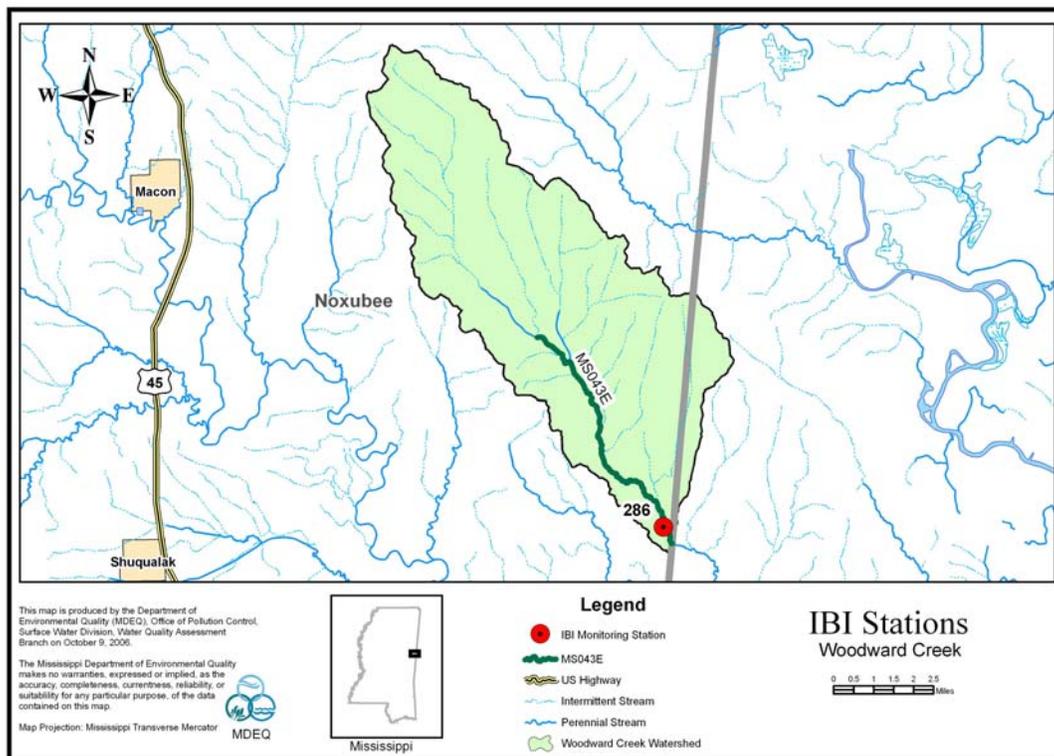


Figure 3. Woodward Creek Water Quality Monitoring Stations

2.2 Assessment of Point Sources

There are no point sources in the watershed.

2.3 Assessment of Non-Point Sources

Non-point loading of nutrients and organic material in a water body results from the transport of the pollutants into receiving waters by overland surface runoff and groundwater infiltration. Most non-point sources of nitrogen will build up and then wash off during rain events. Table 5 presents typical nutrient loading ranges for various land uses.

Table 5. Nutrient Loadings for Various Land Uses

| Landuse | Total Phosphorus [lb/acre-y] | | | Total Nitrogen [lb/acre-y] | | |
|----------------------------|------------------------------|---------|--------|----------------------------|---------|--------|
| | Minimum | Maximum | Median | Minimum | Maximum | Median |
| Roadway | 0.53 | 1.34 | 0.98 | 1.2 | 3.1 | 2.1 |
| Commercial | 0.61 | 0.81 | 0.71 | 1.4 | 7.8 | 4.6 |
| Single Family-Low Density | 0.41 | 0.57 | 0.49 | 2.9 | 4.2 | 3.6 |
| Single Family-High Density | 0.48 | 0.68 | 0.58 | 3.6 | 5.0 | 5.2 |
| Multifamily Residential | 0.53 | 0.72 | 0.62 | 4.2 | 5.9 | 5.0 |
| Forest | 0.09 | 0.12 | 0.10 | 1.0 | 2.5 | 1.8 |
| Grass | 0.01 | 0.22 | 0.12 | 1.1 | 6.3 | 3.7 |
| Pasture | 0.01 | 0.22 | 0.12 | 1.1 | 6.3 | 3.7 |

Source: Horner et al., 1994 in Protocol for Developing Nutrient TMDLs (USEPA 1999)

The drainage area of Woodward Creek is approximately 46.4 square miles. The watershed contains many different landuse types, including forest, cropland, pasture, water, and wetlands. The landuse information for the watershed is based on the Multi-Resolution Land Characterization (MRLC), 2001. Data used for MRLC comes from the 2001 National Land Cover Data set (NLCD). Cropland and pasture are the dominant landuses within this watershed. The landuse distribution for Woodward Creek is shown in Table 6 and Figure 4.

Table 6. Landuse Distribution for Woodward Creek Watershed

| In Acres | Urban | Forest | Cropland | Pasture | Scrub/Barren | Water | Wetlands |
|------------|-------|--------|----------|---------|--------------|-------|----------|
| Woodward | 857 | 1,208 | 11,487 | 9,724 | 1,107 | 1,917 | 3,398 |
| Percentage | 2.9 | 4.1 | 38.7 | 32.7 | 3.7 | 6.5 | 11.4 |

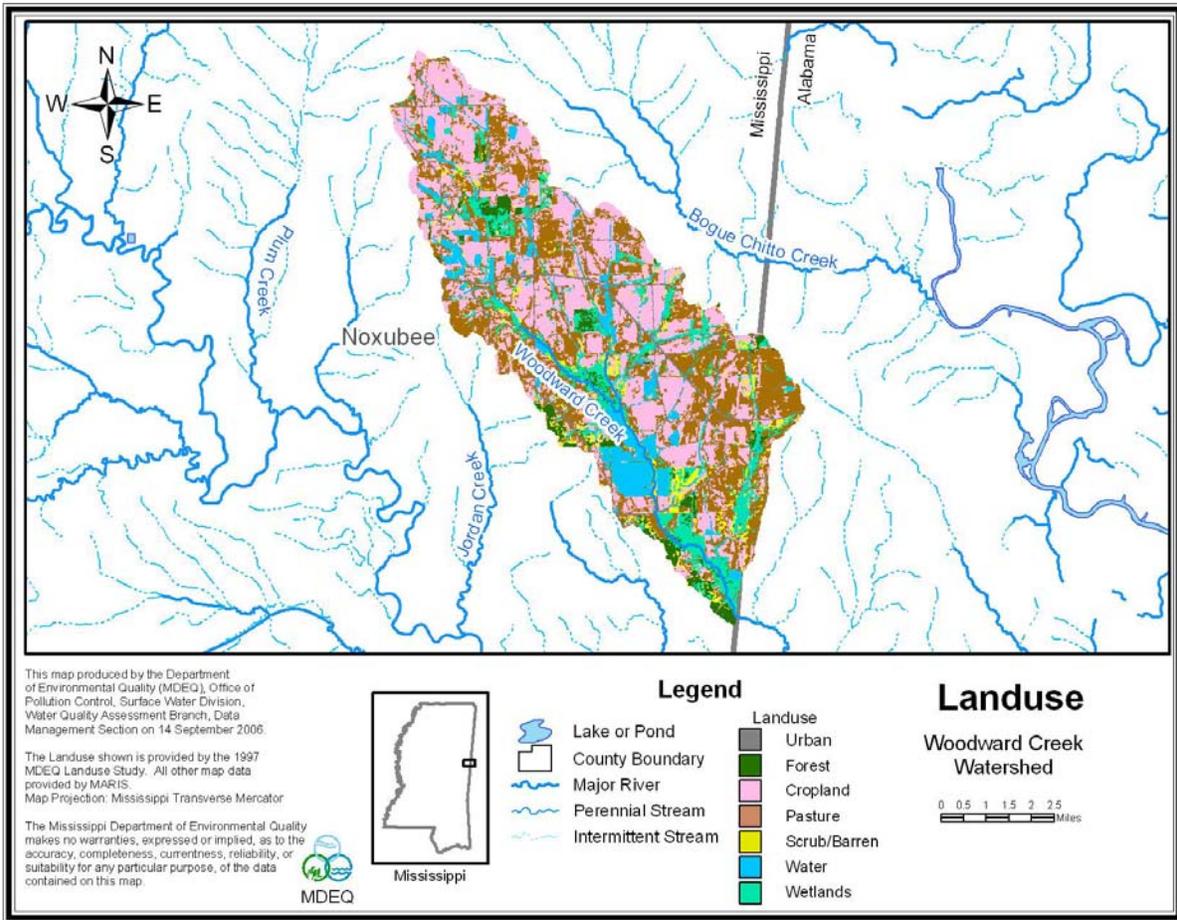


Figure 4. Landuse in Woodward Creek Watershed

2.4 Estimated Existing Load for Total Nitrogen

The estimated existing total nitrogen concentration is based on the median total nitrogen concentrations measured in wadeable streams in Ecoregion 65 with impaired biology and elevated nutrients, which is 1.38 mg/l. The target concentration for TN for Ecoregion 65 is 0.6 to 0.7 mg/l. The average concentration found in this stream is 1.76 mg/L.

To convert the estimated existing total nitrogen concentration to a total nitrogen load, the average annual flow was estimated based on flow data from the USGS gage located on the Noxubee River at Macon, Mississippi (02448000). The average annual flow for this gage is 1,061 cfs. To estimate the amount of flow in Woodward Creek, a drainage area ratio was calculated (1061 cfs/768 square miles = 1.38 cfs/square miles). The ratio was then multiplied by

the drainage area of the impaired segment. The existing TN load was then calculated using Equation 1.

Nutrient Load (lb/day) = Flow (cfs) * 5.394 (conversion factor)* Nutrient Concentration (mg/L)
(Eq. 1)

Table 7. Estimated Existing Total Nitrogen Load for Woodward Creek

| Stream | Area (sq miles) | Average Annual Flow (cfs) | TN (mg/l) | TN (lbs/day) |
|-------------------|----------------------------|--|----------------------|-------------------------|
| Woodward Creek | 46.4 | 64 | 1.38 | 476.4 |

2.5 Estimated Existing Load for Total Phosphorus

The estimated existing total phosphorous concentration is based on the median total phosphorous concentrations measured in wadeable streams in Ecoregion 65 with impaired biology and elevated nutrients, which is 0.18 mg/l. The target concentration for TP for Ecoregion 65 is 0.06 to 0.10 mg/l. The average concentration found in this stream is 0.11mg/L.

To convert the estimated existing total phosphorous concentration to a total phosphorous load, the average annual flow was estimated based on flow data as shown above. The existing TP load was then calculated using Equation 1.

Table 8. Estimated Existing Total Phosphorus Load for Woodward Creek

| Stream | Area (sq miles) | Average Annual Flow (cfs) | TP (mg/l) | TP (lbs/day) |
|-------------------|----------------------------|--|----------------------|-------------------------|
| Woodward Creek | 46.4 | 64 | 0.18 | 62.1 |

ALLOCATION

The allocation for this TMDL involves a wasteload allocation and a load allocation for non-point sources necessary for attainment of water quality standards in the Woodward Creek. The nutrient portion of this TMDL is addressed through initial estimates of the existing and target TN and TP concentrations.

3.1 Wasteload Allocation

There are no point sources in the impaired segment. Therefore the waste load allocation has been set to zero for this TMDL. Future permits will be considered in accordance with Mississippi's *Wastewater Regulations for National Pollutant Discharge Elimination System (NPDES) Permits, Underground Injection Control (UIC) Permits, State Permits, Water Quality Based Effluent Limitations and Water Quality Certification*.

3.2 Load Allocation

Best management practices (BMPs) are recommended in this watershed to reduce potential TN and TP loads from non-point sources. This watershed should be considered a priority for riparian buffer zone restoration and nutrient reduction BMPs. For land disturbing activities related to silviculture, construction, and agriculture, it is recommended that practices, as outlined in "Mississippi's BMPs: Best Management Practices for Forestry in Mississippi" (MFC, 2000), "Planning and Design Manual for the Control of Erosion, Sediment, and Stormwater" (MDEQ, et. al, 1994), and "Field Office Technical Guide" (NRCS, 2000), be followed, respectively.

3.3 Incorporation of a Margin of Safety

The margin of safety is a required component of a TMDL and accounts for the uncertainty about the relationship between pollutant loads and the quality of the receiving water body. The two types of MOS development are to implicitly incorporate the MOS using conservative model assumptions or to explicitly specify a portion of the total TMDL as the MOS. The MOS selected for this model is implicit.

3.4 Calculation of the TMDL

A predictive model was not used to calculate the dissolved oxygen TMDL due to the 7Q10 flow being zero. The TBODu TMDL has been set to zero. Equation 1 was used to calculate the TMDL for TN and TP. The target concentration was used with the average flow for the watershed to determine the TMDL. The TMDL was then compared to the estimated existing load previously calculated. The estimated existing total nitrogen concentration indicates needed reductions of 49% to 57%. The TMDL for TN is 207.1 – 241.7 lbs/day. The estimated existing total phosphorous concentration indicates needed reductions of 44% to 67%. The TMDL for TP is 20.7 – 34.5 lbs/day.

Table 9. TN, TP and TBOD Total Maximum Daily Load based on Ecoregion Range

| Stream | Area (sq miles) | Average Annual Flow (cfs) | Concentration (mg/l) | Load (lbs/day) |
|---------------|----------------------------|--|---------------------------------|---------------------------|
| Woodward TN | 46.4 | 64 | 0.6 – 0.7 | 207.1 – 241.7 |
| Woodward TP | 46.4 | 64 | 0.06 – 0.10 | 20.7 – 34.5 |
| Woodward TBOD | 46.4 | 64 | 0 | 0 |

3.5 Seasonality and Critical Condition

This TMDL accounts for seasonal variability by requiring allocations that ensure year-round protection of water quality standards, including during critical conditions.

CONCLUSION

Nutrients were addressed through an estimate of a preliminary total phosphorous concentration target range and a preliminary total nitrogen concentration target range. Based on the estimated existing and target total nitrogen concentrations, this TMDL recommends a 49% - 57% reduction of the nitrogen loads entering this stream to meet the preliminary target range of 0.6 to 0.7 mg/l. Based on the estimated existing and target total phosphorous concentrations, this TMDL recommends a 44% - 67% reduction of the phosphorous loads entering this stream to meet the preliminary target range of 0.06 to 0.10 mg/l. It is recommended that the Woodward Creek watershed be considered as a priority watershed for riparian buffer zone restoration and any nutrient reduction BMPs. The implementation of these BMP activities should reduce the nutrient load entering the creeks. This will provide improved water quality for the support of aquatic life in the water bodies and will result in the attainment of the applicable water quality standards.

4.1 Public Participation

This TMDL will be published for a 30-day public notice. During this time, the public will be notified by publication in the statewide newspaper. The public will be given an opportunity to review the TMDLs and submit comments. MDEQ also distributes all TMDLs at the beginning of the public notice to those members of the public who have requested to be included on a TMDL mailing list. Anyone wishing to become a member of the TMDL mailing list should contact Greg Jackson at Greg_Jackson@deq.state.ms.us.

All comments should be directed to Greg Jackson at Greg_Jackson@deq.state.ms.us or Greg Jackson, MDEQ, PO Box 10385, Jackson, MS 39289. All comments received during the public notice period and at any public hearings become a part of the record of this TMDL and will be considered in the submission of this TMDL to EPA Region 4 for final approval.

REFERENCES

- MDEQ. 2006. *Stressor Identification Report for Woodward Creek*. Office of Pollution Control.
- MDEQ. 2004. *Mississippi's Plan for Nutrient Criteria Development*. Office of Pollution Control.
- MDEQ. 2003. Development and Application of the Mississippi Benthic Index of Stream Quality (M-BISQ). June 30, 2003. Prepared by Tetra Tech, Inc., Owings Mills, MD, for the Mississippi Department of Environmental Quality, Office of Pollution Control, Jackson, MS. (*For further information on this document, contact Randy Reed [601-961-5158]*).
- MDEQ. 2003. *State of Mississippi Water Quality Criteria for Intrastate, Interstate, and Coastal Waters*. Office of Pollution Control.
- USEPA. 2000. *Stressor Identification Guidance Document*. EPA/822/B-00/025. Office of Water, Washington, DC.
- USEPA. 1999. *Protocol for Developing Nutrient TMDLs*. EPA 841-B-99-007. Office of Water (4503F), United States Environmental Protection Agency, Washington D.C. 135 pp.
- MDEQ. 1994. *Wastewater Regulations for National Pollutant Discharge Elimination System (NPDES) Permits, Underground Injection Control (UIC) Permits, State Permits, Water Quality Based Effluent Limitations and Water Quality Certification*. Office of Pollution Control.
- Telis, Pamela A. 1992. *Techniques for Estimating 7-Day, 10-Year Low Flow Characteristics for Ungaged Sites on Streams in Mississippi*. U.S. Geological Survey, Water Resources Investigations Report 91-4130.
- Metcalf and Eddy, Inc. 1991. *Wastewater Engineering: Treatment, Disposal, and Reuse 3rd ed.* New York: McGraw-Hill.
- Thomann and Mueller. 1987. *Principles of Surface Water Quality Modeling and Control*. New York: Harper Collins.