

FINAL REPORT

March 2008

ID: 908030601

Fecal Coliform TMDL for Cassidy Bayou


Yazoo River Basin

Coahoma, Quitman, and Tallahatchie Counties, Mississippi

Prepared By

Mississippi Department of Environmental Quality
Office of Pollution Control
TMDL/WLA Branch

MDEQ
PO Box 10385
Jackson, MS 39289-0385
(601) 961-5271
www.deq.state.ms.us

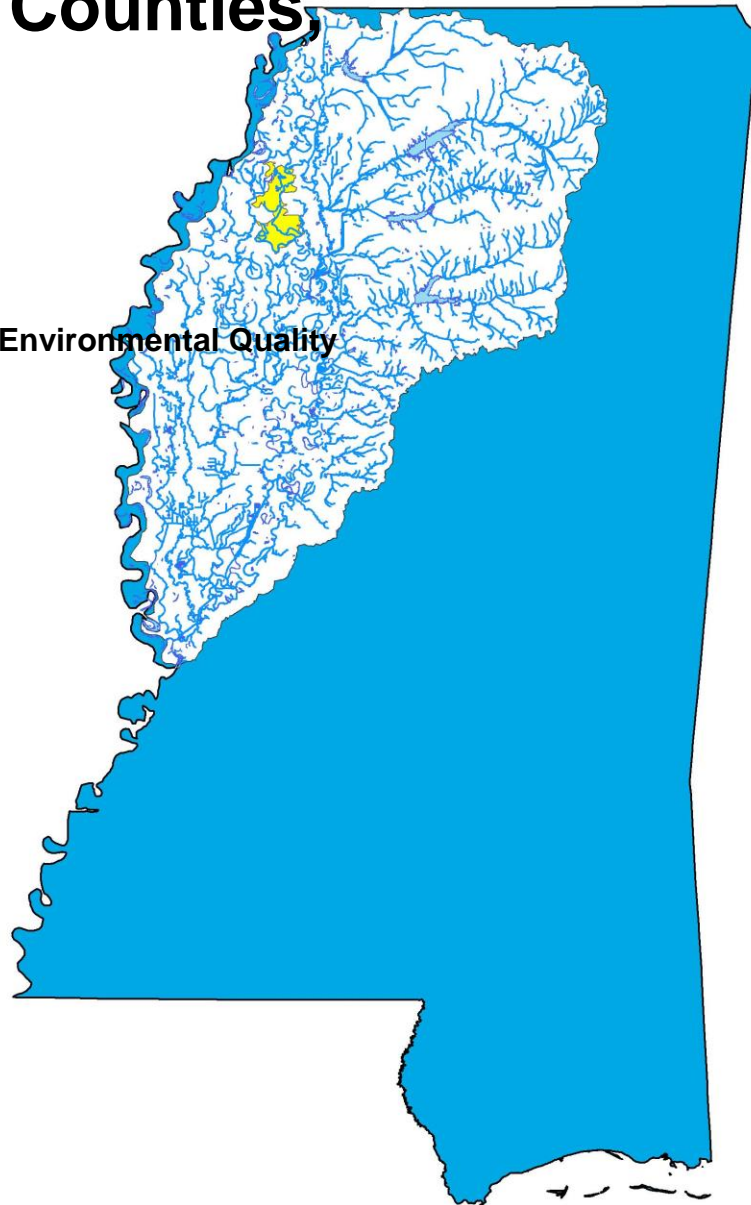

Mississippi Department
of Environmental Quality

FOREWORD

This report has been prepared in accordance with the schedule contained within the federal consent decree dated December 22, 1998. The report contains one or more Total Maximum Daily Loads (TMDLs) for waterbody segments found on Mississippi's 1996 Section 303(d) List of Impaired Waterbodies. Because of the accelerated schedule required by the consent decree, many of these TMDLs have been prepared out of sequence with the State's rotating basin approach. The implementation of the TMDLs contained herein will be prioritized within Mississippi's rotating basin approach.

The amount and quality of the data on which this report is based are limited. As additional information becomes available, the TMDLs may be updated. Such additional information may include water quality and quantity data, changes in pollutant loadings, or changes in land use within the watershed. In some cases, additional water quality data may indicate that no impairment exists.

Prefixes for fractions and multiples of SI units

Fraction	Prefix	Symbol	Multiple	Prefix	Symbol
10 ⁻¹	deci	d	10	deka	da
10 ⁻²	centi	c	10 ²	hecto	h
10 ⁻³	milli	m	10 ³	kilo	k
10 ⁻⁶	micro	μ	10 ⁶	mega	M
10 ⁻⁹	nano	n	10 ⁹	giga	G
10 ⁻¹²	pico	p	10 ¹²	tera	T
10 ⁻¹⁵	femto	f	10 ¹⁵	peta	P
10 ⁻¹⁸	atto	a	10 ¹⁸	exa	E

Conversion Factors

To convert from	To	Multiply by	To Convert from	To	Multiply by
Acres	Sq. miles	0.00156	Days	Seconds	86400
Cubic feet	Cu. Meter	0.02832	Feet	Meters	0.3048
Cubic feet	Gallons	7.4805	Gallons	Cu feet	0.13368
Cubic feet	Liters	28.316	Hectares	Acres	2.4711
cfs	Gal/min	448.83	Miles	Meters	1609.34
cfs	MGD	0.64632	Mg/l	ppm	1
Cubic meters	Gallons	264.173	μg/l * cfs	Gm/day	2.45

CONTENTS

TMDL INFORMATION PAGE.....	vi
EXECUTIVE SUMMARY.....	vii
INTRODUCTION.....	1
1.1 Background.....	1
1.2 Applicable Water Body Segment Use.....	3
1.3 Applicable Water Body Segment Standard.....	4
TMDL ENDPOINT AND WATER QUALITY ASSESSMENT	5
2.1 Selection of a TMDL Endpoint and Critical Condition.....	5
2.1.1 Discussion of the Geometric Mean Test	5
2.1.2 Discussion of the 10% Test	6
2.1.3 Discussion of Combining the Tests.....	6
2.1.4 Discussion of the Targeted Endpoint	8
2.1.5 Discussion of the Critical Condition for Fecal Coliform	8
2.2 Discussion of Instream Water Quality	8
2.2.1 Inventory of Available Water Quality Monitoring Data	8
2.2.2 Analysis of Instream Water Quality Monitoring Data.....	10
SOURCE ASSESSMENT	15
3.1 Assessment of Point Sources	15
3.2 Assessment of Nonpoint Sources.....	15
3.2.1 Beef and Dairy Cattle	16
3.2.2 Land Application of Hog Manure	17
3.2.3 Land Application of Poultry Litter	17
3.2.4 Failing Septic Systems	18
3.2.5 Urban Development.....	18
3.2.6 Wildlife.....	18
3.2.7 Other Direct Inputs	19
MASS BALANCE PROCEDURE.....	20
4.1 Modeling Framework Selection.....	20
4.2 Calculation of the Allowable Load	20
4.3 Calculation of the Percent Reduction	21
ALLOCATION	22
5.1 Wasteload Allocations	22
5.2 Load Allocations.....	22
5.3 Incorporation of a Margin of Safety (MOS)	23
5.4 Calculation of the TMDL.....	23
5.5 Seasonality	24
5.6 Reasonable Assurance.....	24
CONCLUSION.....	25
6.1 Future Monitoring.....	25

6.2 Public Participation..... 25

DEFINITIONS 26

ABBREVIATIONS..... 29

REFERENCES 30

FIGURES

Figure 1. Location of the Cassidy Bayou Watershed..... vii

Figure 2. Cassidy Bayou Watershed Segment 2

Figure 3. Cassidy Bayou Segments with Water Quality Gages 3

Figure 4. Theoretical Capacity Curve 7

Figure 5. 10% Test Curve for Station FTN-35, Summer 2001 11

Figure 6. 10% Test Curve for Station FTN-35, Summer 2003 12

Figure 7. 10% Test Curve for Station FTN-43, Summer 2001 13

Figure 8. 10% Test Curve for Station FTN-43, Summer 2003 14

Figure 9. Land Use Distribution Map for the Cassidy Bayou Watershed..... 16

TABLES

Table 1. Theoretical Capacity Data Set..... 7

Table 2. Fecal Coliform Data reported in Cassidy Bayou, Station FTN-35 8

Table 3. Fecal Coliform Data reported in Cassidy Bayou, Station FTN-35 9

Table 4. Fecal Coliform Data reported in Cassidy Bayou, Station FTN-35 9

Table 5. Fecal Coliform Data reported in Cassidy Bayou, Station FTN-35 9

Table 6. Fecal Coliform Data reported in Cassidy Bayou, Station FTN-43 9

Table 7. Fecal Coliform Data reported in Cassidy Bayou, Station FTN-43 10

Table 8. Fecal Coliform Data reported in Cassidy Bayou, Station FTN-43 10

Table 9. Fecal Coliform Data reported in Cassidy Bayou, Station FTN-43 10

Table 10. NPDES Points Sources 15

Table 11. Land Use Distribution (acres) 16

Table 12. USGS Gage 07288280 Monthly Average Stream Flow 21

Table 13. Wasteload Allocations for Segments MS274E and MS275E..... 22

Table 14. TMDL Summary for Segments MS274E and MS275E (counts per day)..... 24

TMDL INFORMATION PAGE

Listing Information

Name	ID	County	HUC	Cause	Mon/Eval
Cassidy Bayou	MS274E	Coahoma, Quitman	08030202	Pathogens	Monitored
Near Mattson from headwaters to watershed 275 boundary					
Cassidy Bayou	MS275E	Quitman	08030202	Pathogens	Monitored
Near Tutwiler from watershed 274 boundary to watershed 277 boundary					

Water Quality Standard

Parameter	Beneficial use	Water Quality Criteria
Fecal Coliform	Secondary Contact	<p>May - October: Fecal coliform colony counts not to exceed a geometric mean of 200 per 100ml based on a minimum of 5 samples taken over a 30-day period with no less than 12 hours between individual samples, nor shall the samples examined during a 30-day period exceed 400 per 100ml more than 10% of the time.</p> <p>November – April: Fecal coliform colony counts shall not exceed a geometric mean of 2000 per 100 ml based on a minimum of 5 samples taken over a 30-day period with no less than 12 hours between individual samples, nor shall the samples examined during a 30-day period exceed 4000 per 100 ml more than 10% of the time.</p>

Total Maximum Daily Load for Segments MS274E and MS275E

Season	WLA (counts per day)	LA (counts per day)	MOS (counts per day)	Total TMDL (counts per day)	TMDL Percent Reduction
Summer	6.27E+09	8.21E+11	9.19E+10	9.19E+11	89%
Winter	5.74E+10	1.83E+12	2.10E+11	2.10E+12	21%

EXECUTIVE SUMMARY

A pathogen TMDL has been developed for two monitored water body segments of Cassidy Bayou, MS274E and MS275E, which are on the Mississippi 2006 Section 303(d) List of Impaired Water Bodies. The recent monitoring data collected for this segment was assessed based on the 2003 *State of Mississippi Water Quality Criteria for Intrastate, Interstate, and Coastal Waters*. MDEQ selected fecal coliform as an indicator organism for pathogenic bacteria.

Cassidy Bayou flows in a southerly direction from its headwaters to the Yazoo River. This TMDL has been developed for the two segments of Cassidy Bayou from its headwaters to the watershed 277 boundary, which is shown in Figure 1. Due to data limitations, complex dynamic modeling was inappropriate for performing the TMDL allocations for this study, as were load duration curves. Therefore, a mass balance approach was used to develop the TMDL for segments MS274E and MS275E.

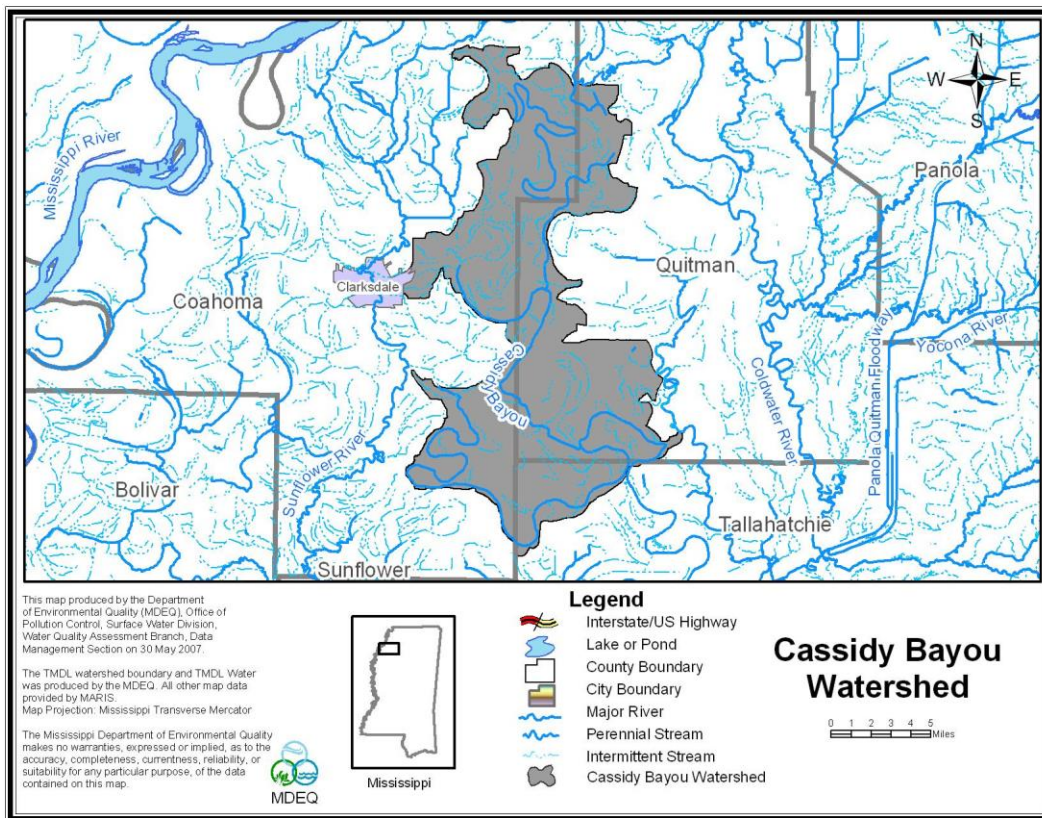


Figure 1. Location of the Cassidy Bayou Watershed

Although fecal coliform loadings from point and nonpoint sources in the watershed were not explicitly represented with a model, a source assessment was conducted for the Cassidy Bayou Watershed. Nonpoint sources of fecal coliform include wildlife, livestock, and urban development. Also considered were the nonpoint sources such as failing septic systems and other direct inputs to Cassidy Bayou.

There are 7 NPDES Permitted discharges included as point sources in the waste load allocation (WLA).

The seasonal variations in hydrology, climatic conditions, and watershed activities are represented through the use of a seasonal TMDL based on seasonal average flows and seasonal monitoring. The critical period was determined to be the summer season. An explicit 10% margin of safety (MOS) was used in the mass balance method to account for uncertainty.

Water quality data indicated violations of the fecal coliform standard in the water body during both the summer and winter seasons. The estimated summer reduction of fecal coliform bacteria for segments MS274E and MS275E is 89%.

INTRODUCTION

1.1 Background

The identification of water bodies not meeting their designated use and the development of total maximum daily loads (TMDLs) for those water bodies is required by Section 303(d) of the Clean Water Act and the Environmental Protection Agency's (EPA) Water Quality Planning and Management Regulations (40 CFR part 130). The TMDL process is designed to restore and maintain the quality of those impaired water bodies through the establishment of pollutant specific allowable loads. The pollutant of concern for this TMDL is pathogens as indicated by fecal coliform. Fecal coliform bacteria are used as indicator organisms because they are readily identifiable and indicate the possible presence of other pathogenic organisms in the water body. The TMDL process can be used to establish water quality based controls to reduce pollution from nonpoint sources, maintain permit requirements for point sources, and restore and maintain the quality of water resources.

A TMDL has been developed for segments MS274E and MS275E of Cassidy Bayou, as shown in Figure 2. Segment MS274E is approximately 15 miles long from its headwaters to the watershed 275 boundary and is listed as monitored the Mississippi 2006 Section 303(d) List of Impaired Water Bodies for pathogens. Segment MS275E is approximately 14 miles long from the watershed 274 boundary to the watershed 277 boundary and is also listed as monitored the Mississippi 2006 Section 303(d) List of Impaired Water Bodies for pathogens. The fecal coliform data that were recently collected for these segments are listed in Section 2.2.

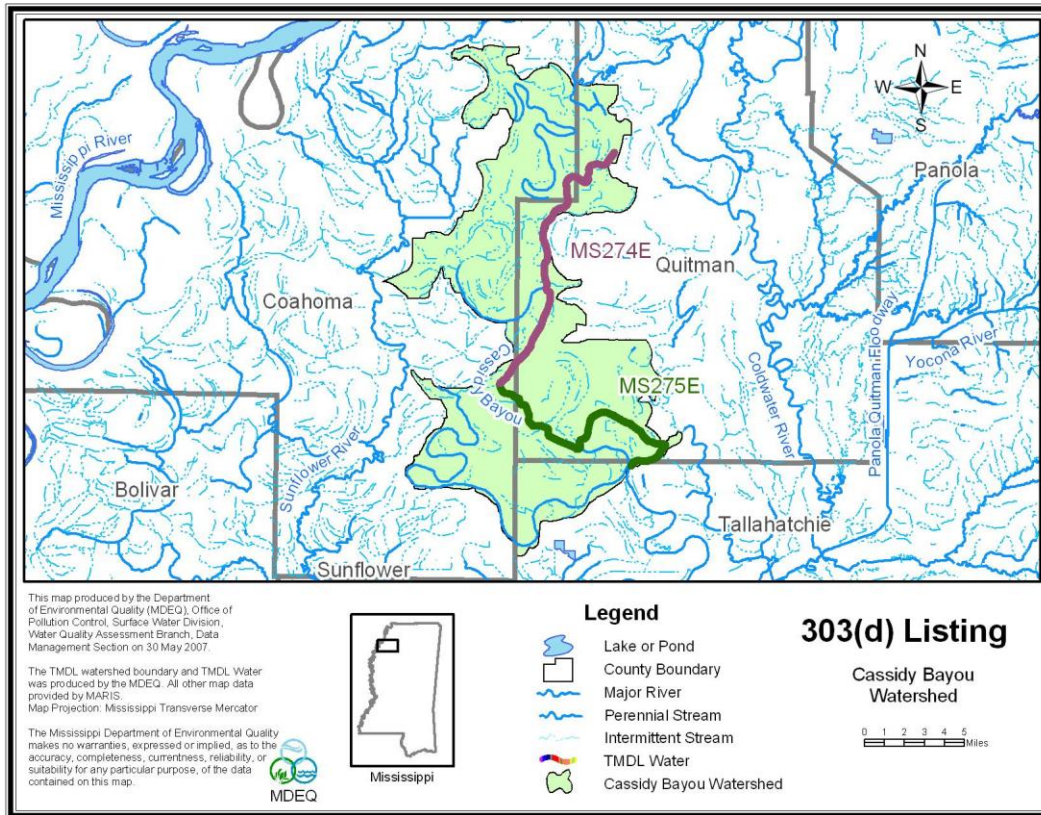


Figure 2. Cassidy Bayou Watershed Segment

The mass balance method is an applicable method for TMDL development when the water quality data are collected in a manner consistent with the water quality standards, that is at least 5 samples collected within a 30 day period. The mass balance method requires water quality data and flow data. The water body segments along with the locations of the water quality stations are shown in Figure 3. The TMDL for segments MS274E and MS275E was developed using the mass balance method with water quality data from Stations FTN-35 and FTN-43 and flow data from USGS flow gage 07288280.

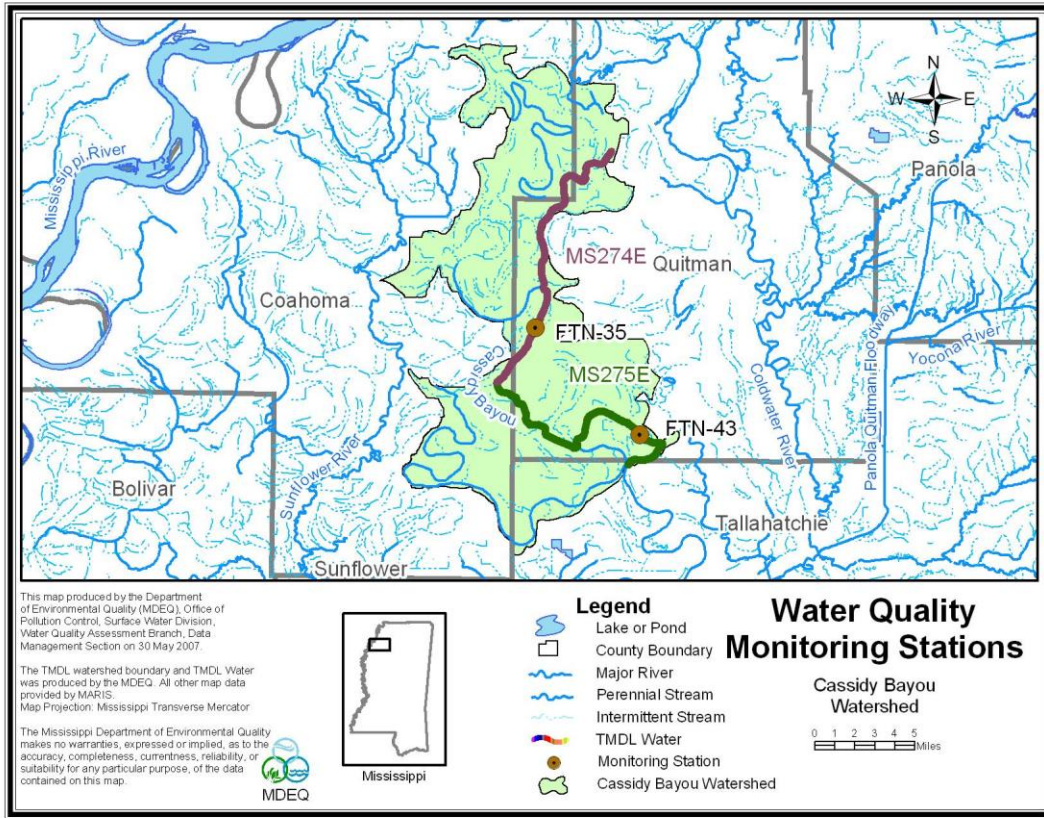


Figure 3. Cassidy Bayou Segments with Water Quality Gages

The Cassidy Bayou segments are in Hydrologic Unit Code (HUC) 08030202 in northwest Mississippi. The watershed is approximately 109,406 acres and is primarily rural. Cropland is the dominant land use within the watershed.

1.2 Applicable Water Body Segment Use

The water use classification for the listed segment of Cassidy Bayou, as established by the State of Mississippi in the *Water Quality Criteria for Intrastate, Interstate and Coastal Waters* regulation, is Fish and Wildlife Support. The designated beneficial uses for Cassidy Bayou are Secondary Contact and Aquatic Life Support. Secondary Contact is defined as incidental contact with the water during activities such as wading, fishing and boating, that are not likely to result in full body immersion.

1.3 Applicable Water Body Segment Standard

The water quality standard applicable to the use of the water body and the pollutant of concern is defined in the *State of Mississippi Water Quality Criteria for Intrastate, Interstate, and Coastal Waters* (MDEQ, 2003). The standard for fecal coliform is different for summer and winter for a secondary contact use, where summer is defined as the months of May through October, and winter is defined as the months of November through April. For the summer months the fecal coliform colony counts shall not exceed a geometric mean of 200 per 100 ml, based on a minimum of 5 samples taken over a 30-day period with no less than 12 hours between individual samples, nor shall the samples examined during a 30-day period exceed 400 per 100 ml more than 10% of the time. For the winter months, the maximum allowable level of fecal coliform shall not exceed a geometric mean of 2000 colonies per 100 ml, based on a minimum of 5 samples taken over a 30-day period with no less than 12 hours between individual samples, nor shall the samples examined during a 30-day period exceed 4000 per 100 ml more than 10% of the time. The water quality standard was used to assess the data to determine impairment in the water body.

TMDL ENDPOINT AND WATER QUALITY ASSESSMENT

2.1 Selection of a TMDL Endpoint and Critical Condition

One of the major components of a TMDL is the establishment of instream numeric endpoints, which are used to evaluate the attainment of acceptable water quality. Instream numeric endpoints, therefore, represent the water quality goals that are to be achieved by implementing the load and waste load reductions specified in the TMDL. The endpoints allow for a comparison between observed instream conditions and conditions that are expected to restore designated uses. MDEQ's fecal coliform standard allows for a statistical review of any fecal coliform data set. There are two tests, the geometric mean test and the 10% test, that the data set must pass to show acceptable water quality.

The geometric mean test states that for the summer the fecal coliform colony count shall not exceed a geometric mean of 200 per 100 ml based on a minimum of 5 samples taken over a 30-day period with no less than 12 hours between individual samples and for the winter the fecal coliform colony count shall not exceed a geometric mean of 2000 per 100 ml based on a minimum of 5 samples taken over a 30-day period with no less than 12 hours between individual samples. The 10% test states that for the summer the samples examined during a 30-day period shall not exceed a count of 400 per 100 ml more than 10% of the time and for the winter the samples examined during a 30-day period shall not exceed a count of 4000 per 100 ml more than 10% of the time.

2.1.1 Discussion of the Geometric Mean Test

The level of fecal coliform found in a natural water body varies greatly depending on several independent factors such as temperature, flow, or distance from the source. This variability is accentuated by the standard laboratory analysis method used to measure fecal coliform levels in the water. The membrane filtration (MF) method uses a direct count of bacteria colonies on a nutrient medium to estimate the fecal level. The fecal coliform colony count per 100 ml is determined using an equation that incorporates the dilution and volume to the sample filtered.

The geometric mean test is used to dampen the impact of the large numbers when there are smaller numbers in the data set. The geometric mean is calculated by multiplying all of the data values together and taking the root of that number based on the number of samples in the data set.

$$G = \sqrt[n]{s1 * s2 * s3 * s4 * s5 * sn}$$

The water quality standard requires a minimum of 5 samples be used to determine the geometric mean. MDEQ routinely gathers 6 samples within a 30-day period in case there is a problem with one of the samples. It is conceivable that there would be more samples available in an intensive survey, but typically each data set will contain 6 samples therefore, n would equal 6. For the data set to indicate no impairment, the result must be less than or equal to 200 in summer and 2000 in winter.

2.1.2 Discussion of the 10% Test

The 10% test looks at the data set as representing the 30 days for 100% of the time. The data points are sorted from the lowest to the highest and each value then represents a point on the curve from 0% to 100% or from day 1 to day 30. The lowest value becomes the 1st data point and the highest data point becomes the nth data point. The water quality standard requires that 90% of the time, the counts of fecal coliform in the stream be less than or equal to 400 counts per 100 ml in summer and 4000 counts per 100 ml in winter.

By calculating a concentration of fecal coliform for every percentile point based on the data set, it is possible to determine a curve that represents the percentile ranking of the data set. Once the 90th percentile of the data set has been determined, it may be compared to the standard of 400 counts per 100 ml. If the 90th percentile of the data is greater than 400, then the stream will be considered impaired. This can be used not only to assess actual water quality data, but also computer generated daily average model results. Actual water quality data will typically have 5 or 6 values in the data set, and computer generated model results would have 30 daily values.

2.1.3 Discussion of Combining the Tests


MDEQ determined a theoretical capacity data set that meets both portions of the water quality standard and is indicative of possible water quality conditions. This theoretical capacity data set is shown in Table 1. The theoretical capacity data set was constructed to represent the maximum amount of fecal coliform per day that will still meet both portions of the water quality standard. The theoretical capacity data set was then plotted, generating a theoretical capacity curve. This curve can be seen in Figure 4. The integral of the theoretical capacity curve is used for mass balance TMDL calculations. By multiplying the integral of the theoretical capacity curve by the flow in a given water body, the mass balance TMDL can be calculated.

When actual data violate both portions of the standard, and the data are plotted in a similar way, the resulting curve can be compared to the theoretical capacity curve to determine the percent reduction of fecal coliform necessary for the water body to meet both portions of the water quality standard, the geometric mean test and the 10% test.

Table 1. Theoretical Capacity Data Set

Fecal Coliform (counts/100ml)	Percentile Ranking
37.82	0.0%
52.75	3.4%
65.68	6.9%
79.61	10.3%
93.54	13.8%
107.47	17.2%
121.4	20.7%
135.33	24.1%
149.26	27.6%
163.19	31.0%
177.12	34.5%
191.05	37.9%
204.98	41.4%
218.91	44.8%
232.84	48.3%
246.77	52.7%
260.7	55.2%
274.63	58.6%
288.56	62.1%
302.49	65.5%
316.42	69.0%
330.35	72.4%
344.28	75.9%
358.21	79.3%
372.14	82.8%
386.07	86.2%
400	89.7%
400	93.1%
400	96.6%
400	100.0%

Figure 4. Theoretical Capacity Curve

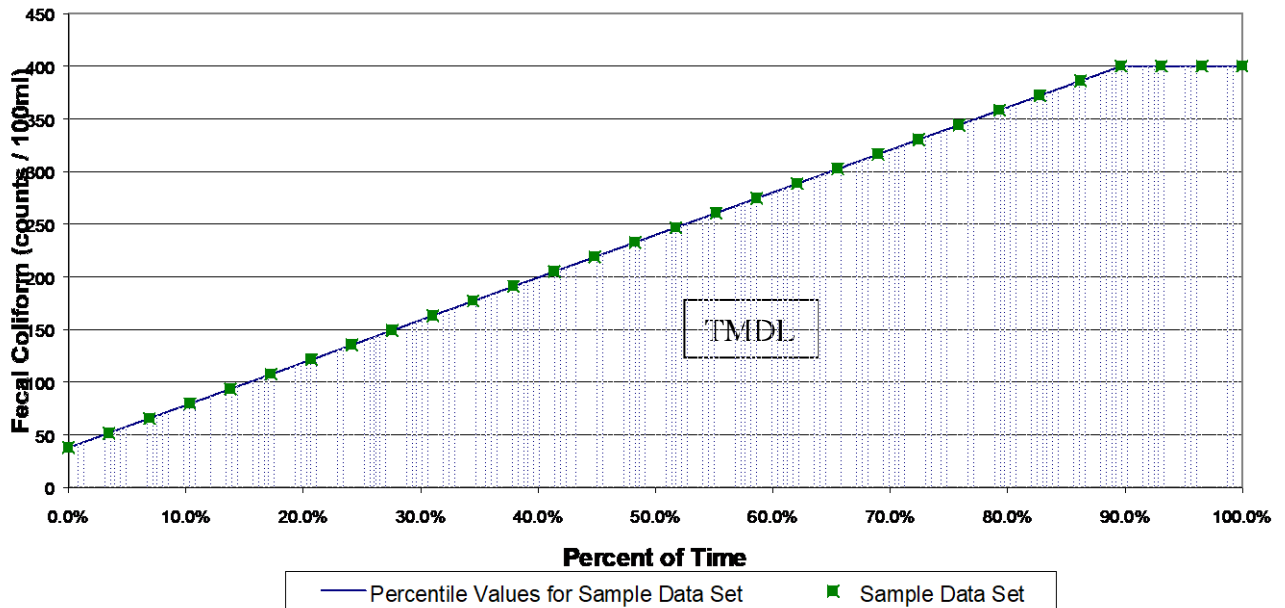

2.1.4 Discussion of the Targeted Endpoint

While the endpoint of a TMDL calculation is similar to a standard for a pollutant, the endpoint is not the standard. For a mass balance TMDL, the endpoint selected is both portions of the standard, that is the geometric mean test and the 10% test. Meeting the geometric mean test and applying the 10% test to the data sets applies both parts of the standard to an actual data set or when considering a computer generated data set. It is therefore appropriate to select both portions of the standard as the targeted endpoint for the mass balance TMDL.

2.1.5 Discussion of the Critical Condition for Fecal Coliform

Critical conditions for waters impaired by nonpoint sources generally occur during periods of wet-weather and high surface runoff. But, critical conditions for point source dominated systems generally occur during periods of low-flow, low-dilution conditions. Therefore, an examination of the data is needed to determine the critical 30-day period to be used for the TMDL.

2.2 Discussion of Instream Water Quality

Monitoring was performed in a manner consistent with the water quality standards. At least 5 samples were collected in a 30-day period, at Station FTN-35 in segment MS274E and at Station FTN-43 in segment MS275E during two summer seasons and two winter seasons in 2001 and 2003.

2.2.1 Inventory of Available Water Quality Monitoring Data

The data collected at Station FTN-35 is provided in Tables 2 through 5 and the data collected at Station FTN-43 is provided Tables 6 through 9.

**Table 2. Fecal Coliform Data reported in Cassidy Bayou, Station FTN-35
Summer 2001**

Date	Time	Fecal Coliform (counts/100ml)	Geometric Mean	Geometric Mean Test Violation	90 th Percentile	10% Test Violation
9/26/2001	11:22	94	629.7	Yes, geometric mean is >200	6000	Yes, 90 th percentile is >400
10/04/2001	12:31	80				
10/09/2001	12:45	144				
10/15/2001	11:50	6000				
10/17/2001	9:07	6000				
10/23/2001	11:23	1600				

Table 3. Fecal Coliform Data reported in Cassidy Bayou, Station FTN-35
Winter 2001

Date	Time	Fecal Coliform (counts/100ml)	Geometric Mean	Geometric Mean Test Violation	90 th Percentile	10% Test Violation
11/13/2001	11:29	156	586.6	No, geometric mean is <2000	5050	Yes, 90 th percentile is >4000
11/19/2001	14:00	220				
11/26/2001	11:40	6000				
11/28/2001	10:10	4100				
12/05/2001	11:55	232				
12/10/2001	12:45	208				

Table 4. Fecal Coliform Data reported in Cassidy Bayou, Station FTN-35
Winter 2003

Date	Time	Fecal Coliform (counts/100ml)	Geometric Mean	Geometric Mean Test Violation	90 th Percentile	10% Test Violation
3/17/2003	12:20	51	204.6	No, geometric mean is <2000	1171.5	No, 90 th percentile is <4000
3/20/2003	10:05	1933				
3/24/2003	12:55	410				
3/26/2003	12:30	270				
4/1/2003	9:55	80				
4/3/2003	9:55	84				

Table 5. Fecal Coliform Data reported in Cassidy Bayou, Station FTN-35
Summer 2003

Date	Time	Fecal Coliform (counts/100ml)	Geometric Mean	Geometric Mean Test Violation	90 th Percentile	10% Test Violation
8/18/2003	11:40	50	258.4	Yes, geometric mean is >200	1430	Yes, 90 th percentile is >400
8/20/2003	10:35	700				
8/22/2003	10:15	1060				
8/25/2003	9:55	27				
8/27/2003	10:00	165				
9/3/2003	10:25	1800				

Table 6. Fecal Coliform Data reported in Cassidy Bayou, Station FTN-43
Summer 2001

Date	Time	Fecal Coliform (counts/100ml)	Geometric Mean	Geometric Mean Test Violation	90 th Percentile	10% Test Violation
9/26/2001	10:40	480	669.9	Yes, geometric mean is >200	2550	Yes, 90 th percentile is >400
10/04/2001	12:07	236				
10/09/2001	12:20	500				
10/15/2001	11:20	250				
10/17/2001	9:32	2900				
10/23/2001	10:53	2200				

Table 7. Fecal Coliform Data reported in Cassidy Bayou, Station FTN-43
Winter 2001

Date	Time	Fecal Coliform (counts/100ml)	Geometric Mean	Geometric Mean Test Violation	90 th Percentile	10% Test Violation
11/13/2001	10:59	58	439.5	No, geometric mean is <2000	3100	No, 90 th percentile is <4000
11/19/2001	13:30	2000				
11/26/2001	11:10	132				
11/28/2001	9:35	4200				
12/05/2001	11:20	320				
12/10/2001	12:20	350				

Table 8. Fecal Coliform Data reported in Cassidy Bayou, Station FTN-43
Winter 2003

Date	Time	Fecal Coliform (counts/100ml)	Geometric Mean	Geometric Mean Test Violation	90 th Percentile	10% Test Violation
3/17/2003	11:35	164	346.1	No, geometric mean is <2000	1400	No, 90 th percentile is <4000
3/20/2003	9:35	2400				
3/24/2003	12:25	260				
3/26/2003	12:10	400				
4/1/2003	9:35	175				
4/3/2003	9:35	240				

Table 9. Fecal Coliform Data reported in Cassidy Bayou, Station FTN-43
Summer 2003

Date	Time	Fecal Coliform (counts/100ml)	Geometric Mean	Geometric Mean Test Violation	90 th Percentile	10% Test Violation
7/10/2003	10:00	255	418.7	Yes, geometric mean is >200	924	Yes, 90 th percentile is >400
7/16/2003	10:00	180				
7/18/2003	10:00	1180				
7/23/2003	9:35	440				
8/8/2003	10:00	540				

2.2.2 Analysis of Instream Water Quality Monitoring Data

For segment MS274E, the data collected at Station FTN-35 during the summer monitoring periods in 2001 and 2003 indicated a violation of both portions of the standard. A graphical representation can be seen in Figures 5 and 6. A line has been added to the summer graph representing 400 counts/100 ml and showing that this occurs less than 90% of the time, meaning that the counts of fecal coliform in the stream are greater than 400 more than 10% of the time. Additionally, the data collected during the winter of 2001 indicated a violation of the percent of time in exceedence portion of the standard. For segment MS275E, the data collected at Station FTN-43 during the summer monitoring periods in 2001 and 2003 indicated a violation of both portions of the standard. A graphical representation can be seen in Figures 7 and 8. The data collected during the winter monitoring periods does not indicate a violation of either portion of the standard.

Figure 5. 10% Test Curve for Station FTN-35, Summer 2001

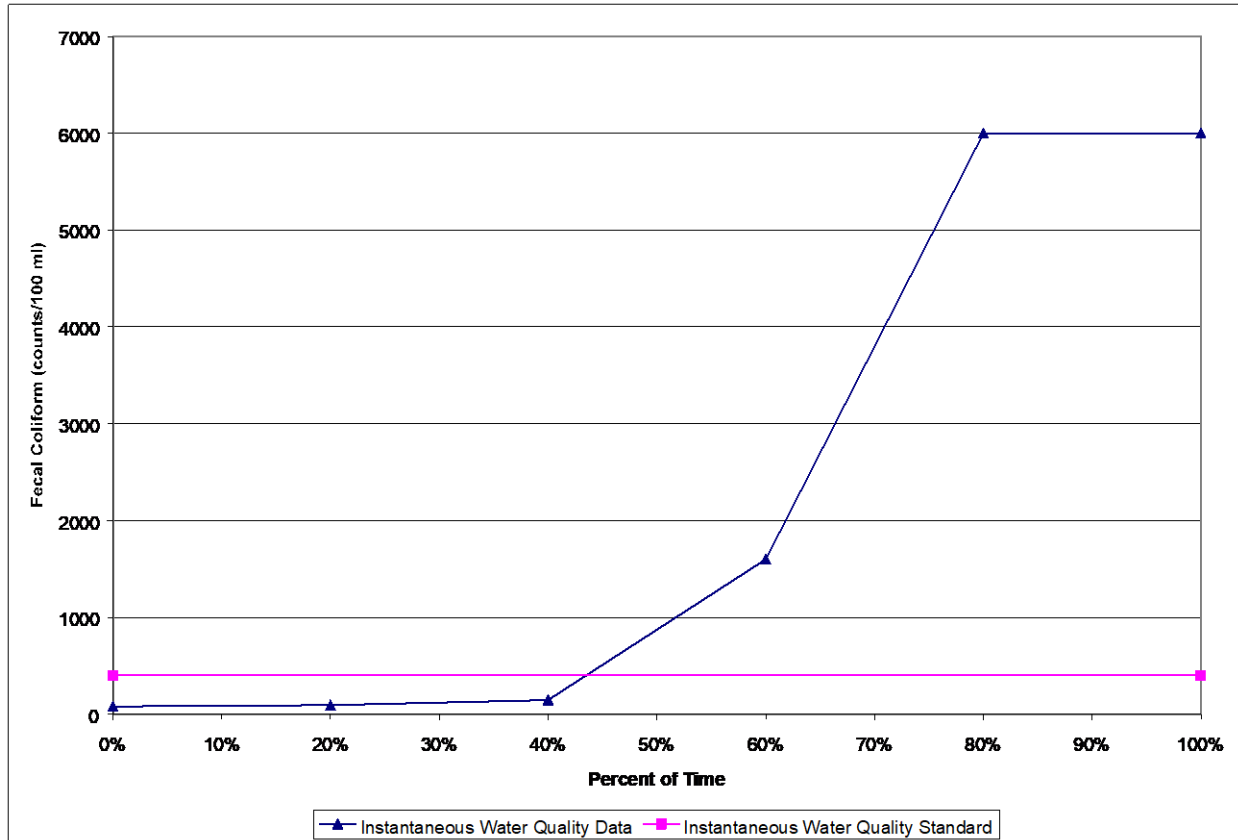


Figure 6. 10% Test Curve for Station FTN-35, Summer 2003

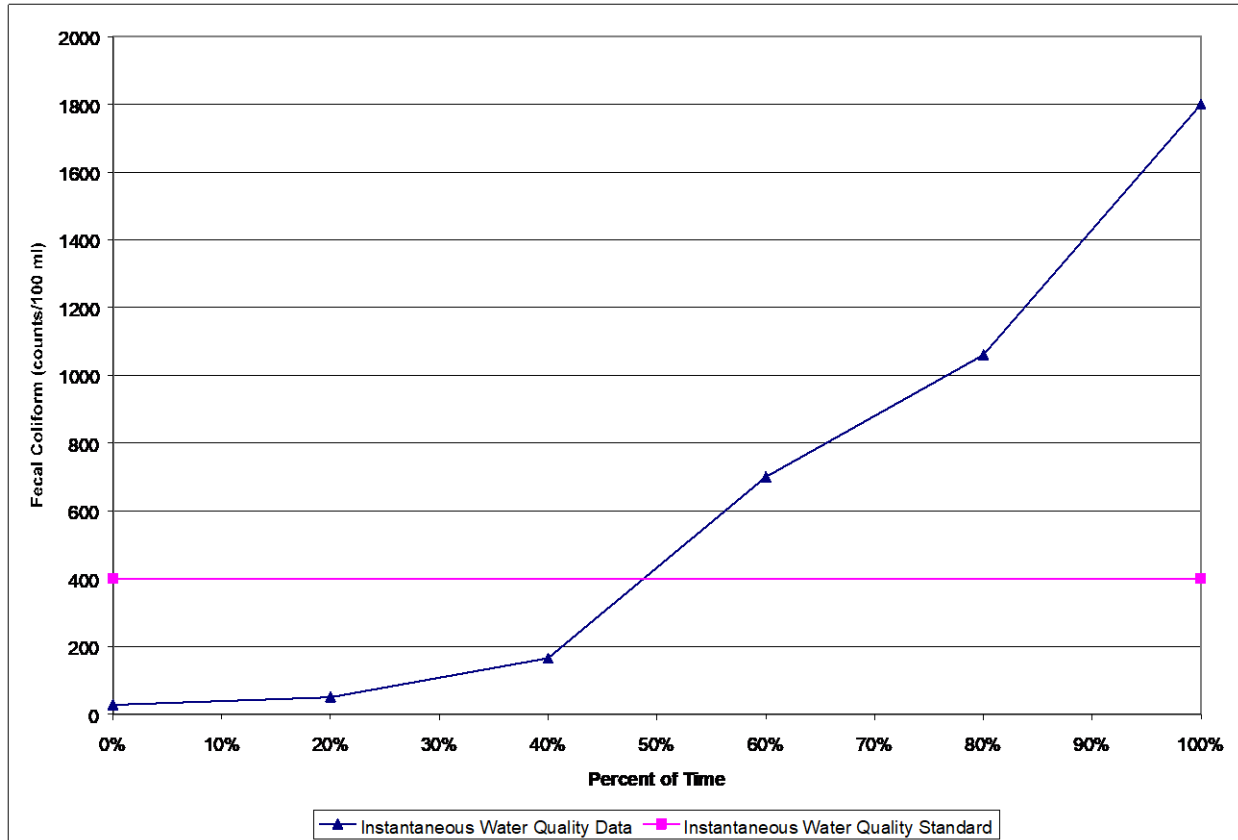


Figure 7. 10% Test Curve for Station FTN-43, Summer 2001


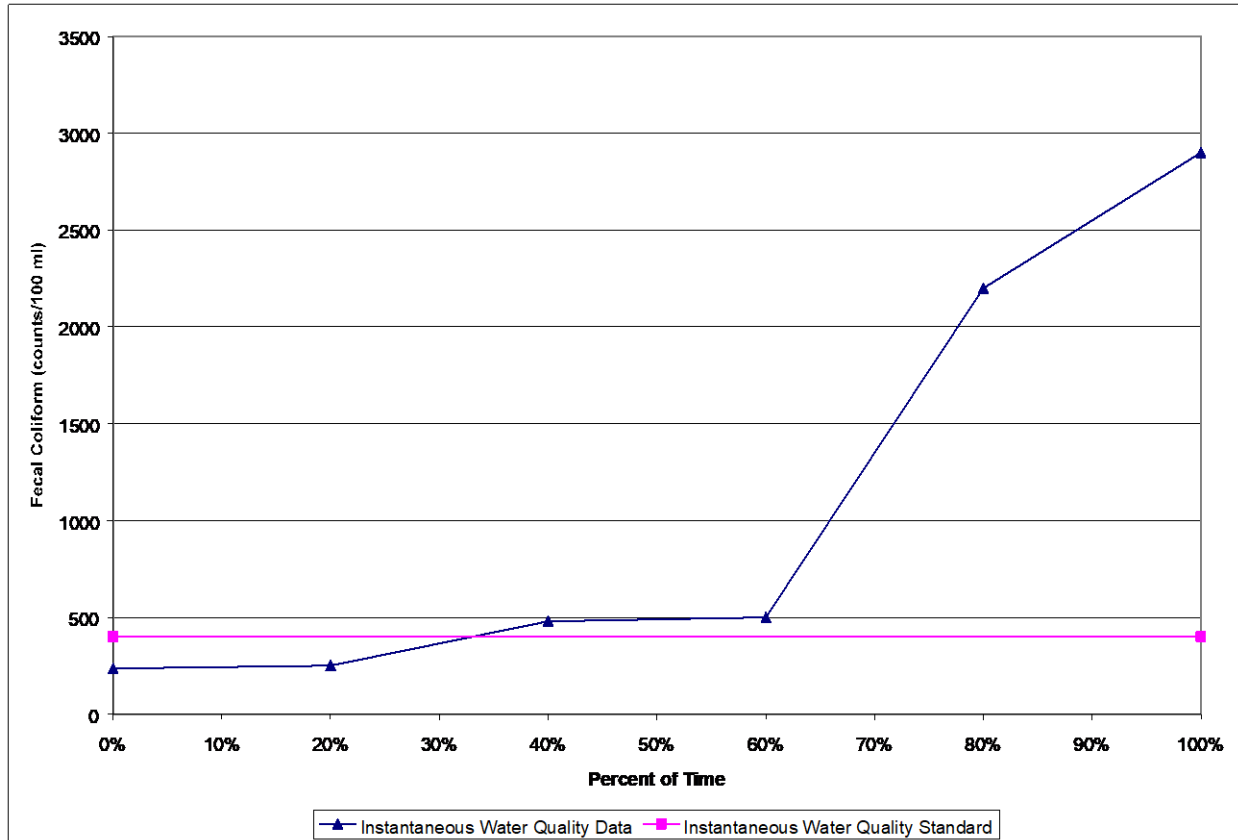


Figure 8. 10% Test Curve for Station FTN-43, Summer 2003

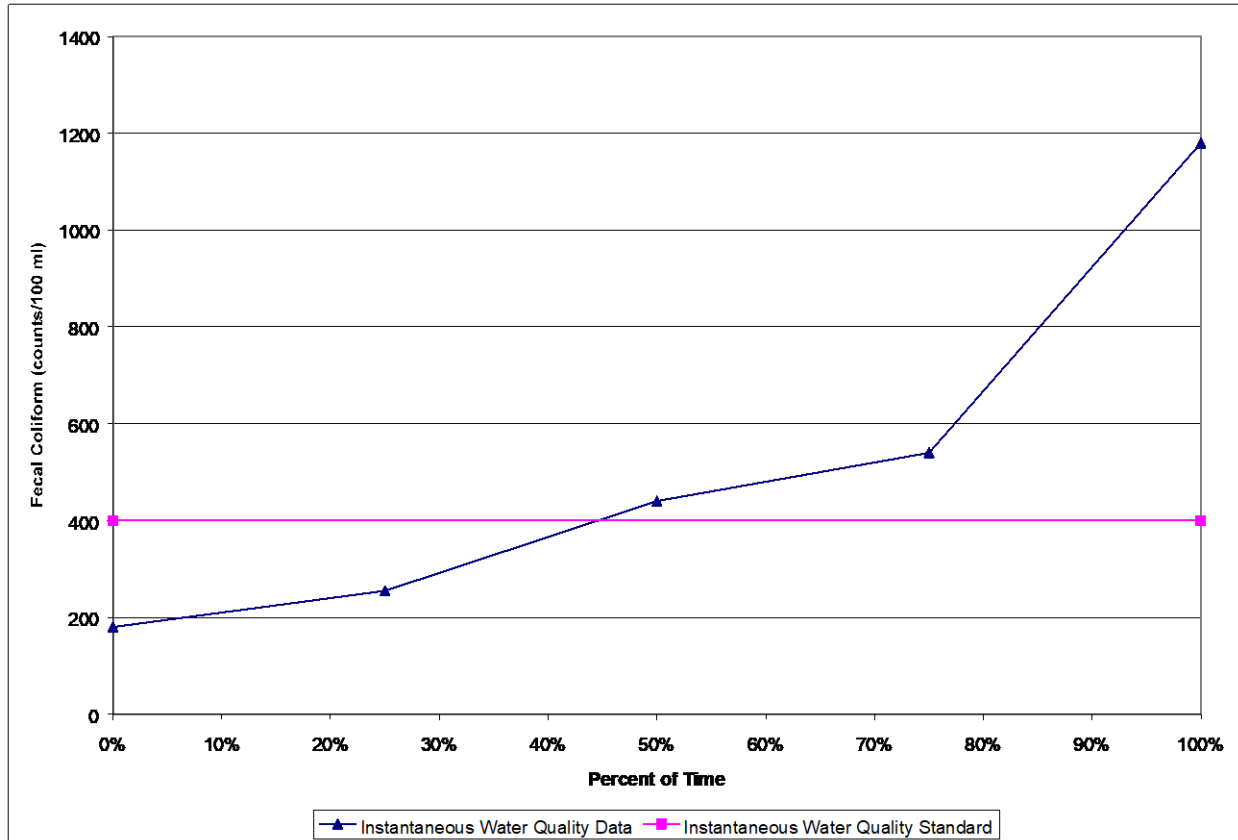

SOURCE ASSESSMENT

The TMDL evaluation summarized in this report examined all known potential fecal coliform sources in the Cassidy Bayou Watershed. In evaluation of the sources, loads were characterized by the best available information, monitoring data, literature values, and local management activities. This section documents the available information and interpretation for the analysis.

3.1 Assessment of Point Sources

Point sources of fecal coliform bacteria have their greatest potential impact on water quality during periods of low flow. Thus, an evaluation of point sources that discharge fecal coliform bacteria was necessary in order to quantify the degree of impairment present during low flow periods.

There are 7 point sources in the Cassidy Bayou Watershed. The effluent from these point sources was characterized based on all available monitoring data including permit limits, discharge monitoring reports, and information on treatment type. These point sources are listed in Table 10.

Table 10. NPDES Points Sources

Facility Name	NPDES	Flow (MGD)	Summer Permit Limit Average/Maximum (counts/100ml)	Winter Permit Limit Average/Maximum (counts/100ml)	Receiving Stream
Coahoma County School District	MS0031968	0.01	200/400	200/400	Big Creek
Corso Distributing Company Inc	MS0047511	0.0015	200/400	200/400	Unnamed ditch thence Kay Bayou
Green Acres Water Association In	MS0022683	0.057	200/400	200/400	Oxbow Bayou thence Cassidy Bayou
Region 1 Drug and Alcohol Rehabi	MS0049077	0.0028	200/400	200/400	Tributary of Hopson Bayou
Region 1 Fairland House	MS0055930	0.0048	200/400	200/400	Tributary of Hopson Bayou
Shady Nook Inc	MS0058246	0.0015	200/400	200/400	North Delta Drainage District
Tutwiler POTW	MS0025054	0.75	200/400	2000/4000	Hopson Bayou

3.2 Assessment of Nonpoint Sources

There are many potential nonpoint sources of fecal coliform bacteria for Cassidy Bayou, including:

- ◆ Beef and dairy cattle
- ◆ Failing septic systems
- ◆ Urban development
- ◆ Wildlife
- ◆ Other direct inputs

The 109,406 acre drainage area of Cassidy Bayou contains many different land use types, including urban, forest, cropland, pasture, scrub/barren, water, and wetlands. The area directly surrounding the **Yazoo River Basin**

impaired segments, MS274E and MS275E, is predominantly cropland. The land use distribution for the watershed is provided in Table 11 and displayed in Figure 9. The land use information for the watershed is based on the State of Mississippi’s Automated Resource Information System (MARIS), 1997. This data set is based Landsat Thematic Mapper digital images taken between 1992 and 1993. The MARIS data are classified on a modified Anderson level one and two system with additional level two wetland classifications. The land use categories were grouped into the land uses of urban, forest, cropland, pasture, disturbed, wetlands, and water.

Table 11. Land Use Distribution (acres)

	Urban	Forest	Cropland	Pasture	Scrub/Barren	Water	Wetland
Area (acres)	980	0	97,594	3,449	202	210	6,971
% Area	0.9%	0%	89.2%	3.1%	0.2%	0.2%	6.4%

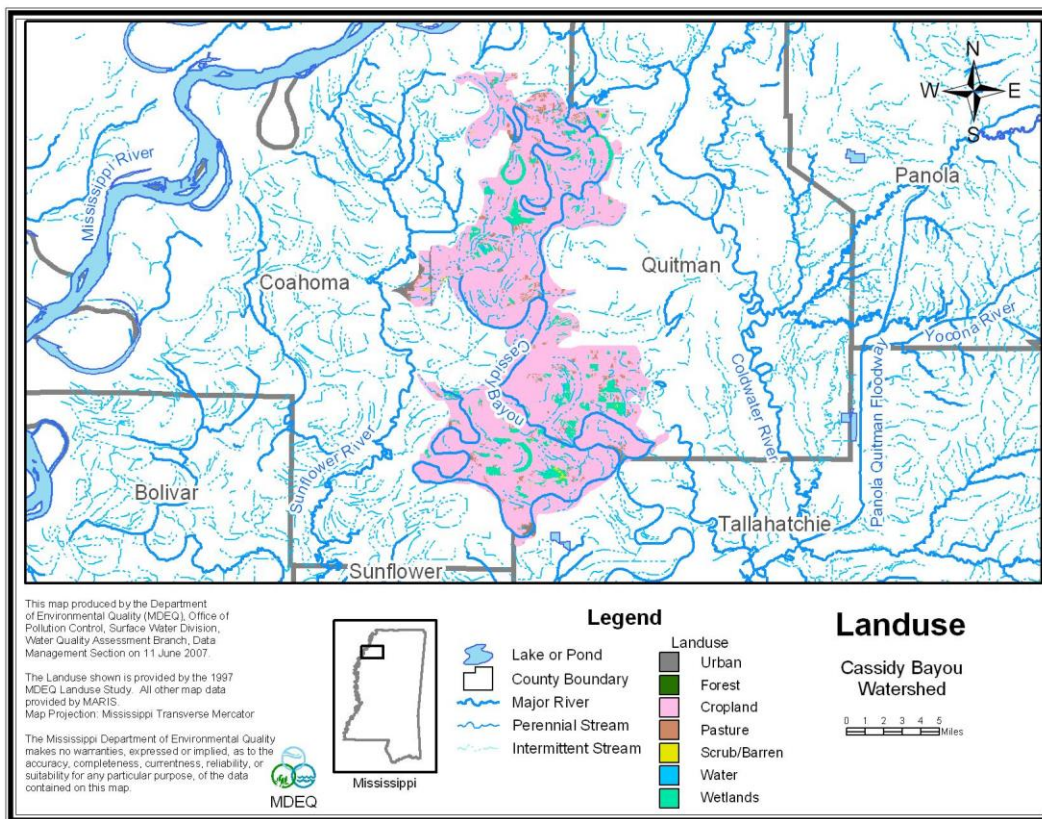


Figure 9. Land Use Distribution Map for the Cassidy Bayou Watershed

3.2.1 Beef and Dairy Cattle

Grazing cattle deposit manure on pastureland where it is available for wash-off and delivery to receiving water bodies. Beef cattle have access to pastureland for grazing all of the time. For dairy cattle, the dry cattle and heifers have access to pastureland for grazing all of the time. Manure produced by grazing beef and dairy cows is directly deposited onto pastureland and is available for wash off.

Large dairy farms, over 200 head, typically confine the milking herd at all times. Small dairy farms confine the lactating cattle for a limited time during the day for milking and feeding. The manure

collected during confinement is applied to the available pastureland in the watershed. Application rates of dairy cow manure to pastureland vary monthly according to management practices currently used in this area.

The *2002 Census of Agriculture* (USDA, 2004) produced by the National Agriculture Statistics Service (NASS) was used estimate the number of cattle in the watershed. The cattle are primarily beef cattle, heifers, steers, and bulls. The Cassidy Bayou Watershed is in Coahoma, Quitman, and Tallahatchie Counties. In these counties, there are 129 farms, 112 of which are in Tallahatchie County, with a total of approximately 6,500 head of cattle. Only 1 farm has greater than 500 head of cattle and located in Tallahatchie County. There are no farms with milk cows in these counties.

3.2.2 Land Application of Hog Manure

Processed manure from confined hog operations is usually collected in lagoons and routinely applied to pastureland according to the management practices used in the area. The amount of the manure application is determined by the nitrogen uptake of the plant being sprayed. The frequency is determined by rain events so that the waste is not sprayed on saturated ground or just prior to a rain event to minimize runoff. Another factor in the application of the manure is pumping the lagoons often enough to avoid a lagoon overflow. Also, the waste is not land applied during the winter months when there is no forage or crop being grown. This manure is a potential contributor of bacteria to receiving water bodies due to runoff produced during a rain event.

Data from the *2002 Census of Agriculture* (USDA, 2004) produced by the NASS indicate there are 4 hog farms in Coahoma and Quitman Counties combined with approximately 300 total hogs. There are no hog farms or hogs listed for Tallahatchie County. None of the hog farms are classified as CAFOs.

3.2.3 Land Application of Poultry Litter

Predominantly, two kinds of chickens are raised on farms in the Yazoo River Basin, broilers and layers. For the broiler chickens, the amount of growth time from when the chicken is born to when it is sold off the farm is approximately 48 days or 1.6 months. Broiler chickens are confined in poultry houses all of the time. Typically, the dry waste accumulated in the poultry houses is “de-caked” between flocks unless a disease situation warrants clean-out before the change of flocks. During “de-caking”, approximately the top two inches of litter is removed. Every year or two, the middle third of the poultry house is removed and the remaining litter is spread evenly in the house. The majority of the litter is used as a fertilizer on hay and row crops and may be used in areas of the state other than the location of the poultry houses. The litter is applied in the spring, summer, and early fall and rates are determined by a phosphorous index.

Layer chickens are confined at all times and remain on farms for ten months or longer. Large scale layer operations collect the chicken waste in a lagoon and periodically spray applies the waste to corn fields. The application rates vary monthly from the spring through the early fall. There are 9 farms with some form of poultry in Tallahatchie County including layers, turkeys, ducks, geese, and other poultry. All of the layer farms have less than 50 birds. There are no poultry farms or poultry listed for Coahoma and Quitman Counties

3.2.4 Failing Septic Systems

Septic systems have a potential to deliver fecal coliform bacteria loads to surface waters due to malfunctions, failures, and direct pipe discharges. Properly operating septic systems treat and dispose of wastewater through a series of underground field lines. The water is applied through these lines into a rock substrate, thence into underground absorption. The systems can fail when the field lines are broken, or when the underground substrate is clogged or flooded. A failing septic system's discharge can reach the surface, where it becomes available for wash-off into the stream. Another potential problem is a direct bypass from the system to a stream. In an effort to keep the water off the land, pipes are occasionally placed from the septic tank or the field lines directly to the creek.

Another consideration is the use of individual onsite wastewater treatment plants. These treatment systems are in wide use in Mississippi. They can adequately treat wastewater when properly maintained. However, these systems may not receive the maintenance needed for proper, long-term operation. These systems require some sort of disinfection to properly operate. When this expense is ignored, the water does not receive adequate disinfection prior to release.

Septic systems have an impact on nonpoint source fecal coliform impairment in the Yazoo River Basin. The best management practices needed to reduce this pollutant load need to prioritize eliminating septic tank failures and improving maintenance and proper use of individual onsite treatment systems.

Quitman and Tallahatchie Counties do not have a wastewater ordinance, however, Coahoma County does. A wastewater ordinance requires that the wastewater treatment and disposal system used be certified as sufficient. It also ensures that electricity, water, or natural gas will not be made available without written approval from the county Health Department or the Mississippi Department of Environmental Quality that the wastewater treatment and disposal system used is sufficient. The lack of a wastewater ordinance in Coahoma and Quitman Counties could allow sources in rural areas without a sewer system to discharge with little or no wastewater treatment.

3.2.5 Urban Development

There is an insignificant amount of land classified as urban in the Cassidy Bayou Watershed.

3.2.6 Wildlife

Wildlife present in the Cassidy Bayou Watershed contributes to fecal coliform bacteria on the land surface which is then available for wash-off and delivery to receiving water bodies. Some form of wildlife may be present on all land uses within the watershed. Also, wildlife is present throughout the year.

3.2.7 Other Direct Inputs

Other direct inputs of fecal coliform bacteria to water bodies in the Cassidy Bayou Watershed could include illicit discharges, human recreation, leaking sewer collection lines, and access of both domestic and wild animals to the stream.

MASS BALANCE PROCEDURE

Establishing the relationship between the instream water quality target and the source loading is a critical component of TMDL development. It allows for the evaluation of management options that will achieve the desired source load reductions. Ideally, the linkage will be supported by monitoring data that allow the TMDL developer to associate certain water body responses to flow and loading conditions. In this section, the selection of the modeling tools, setup, and model application are discussed.

4.1 Modeling Framework Selection

A mass balance approach was used to calculate the TMDLs for segments MS274E and MS275E. This method of analysis was selected because data limitations precluded the use of more complex methods. The mass balance approach is suitable for this TMDL.

4.2 Calculation of the Allowable Load

The mass balance approach utilizes the conservation of mass principle. Loads can be calculated by multiplying the fecal coliform concentration in the water body by the flow. The principle of the conservation of mass allows for the addition and subtraction of those loads to determine the appropriate numbers necessary for the TMDL. The loads can be calculated using following relationship:

$$\text{Load (counts per day)} = \text{Average Daily Capacity} \left(\frac{\text{day} \cdot \text{counts}}{100 \text{ ml}} \right) \times \text{Flow (cfs)} \times \text{Conversion Factor}$$

$$\text{when Conversion Factor} = \left(\frac{28316.8 \text{ ml}}{\text{ft}^3} \right) \times \left(\frac{100 \text{ ml}}{100 \text{ ml}} \right) \times \left(\frac{60 \text{ s}}{1 \text{ min}} \right) \times \left(\frac{60 \text{ min}}{1 \text{ hr}} \right) \times \left(\frac{24 \text{ hr}}{1 \text{ day}} \right)$$

$$= 2.45E + 07 \left(\frac{100 \text{ ml} \cdot \text{s}}{\text{ft}^3 \cdot \text{day}} \right)$$

The first step in calculating the average daily capacity is to calculate the theoretical 30 day capacity, as shown in the equation below, by taking the integral of the theoretical capacity curve shown in Figure 4.

$$\int_0^{26.91} [13.47x + 37.82] dx + \int_{26.91}^{30} 400 dx = 7129.4 (\text{day} \cdot \text{counts}/100 \text{ ml})$$

The average daily capacity is then computed by dividing the theoretical 30 day capacity by 30.

$$\text{Average Daily Capacity} = \left(\frac{7129.4 (\text{day} \cdot \text{counts}/100 \text{ ml})}{30} \right) = 237.65 (\text{day} \cdot \text{counts}/100 \text{ ml})$$

To calculate the flow for segments MS274E and MS275E, a drainage area ratio was used with flow data from USGS flow gage 07288280 on the Big Sunflower River near Merigold, MS. The average

monthly stream flow for gage 07287400 is given in Table 12. The average summer discharge at the flow gage was calculated by averaging the USGS monthly average stream flows for the summer period (May through October) for the period of record of the gage. The average winter discharge at the flow gage was calculated accordingly. The average summer flow for the segments was estimated to be 157.87 cfs based on the average summer discharge at station 07288280, as shown in the following equations. This method was also used to calculate the average winter discharge of 390.19 cfs.

Table 12. USGS Gage 07288280 Monthly Average Stream Flow

Month	January	February	March	April	May	June
Flow (cfs)	1,440	1,480	1,310	841	864	629
Month	July	August	September	October	November	December
Flow (cfs)	589	325	224	434	502	1,420

$$\text{Avg Seasonal Discharge (cfs)} = \left\{ \frac{[\text{07288280 Avg Seasonal Discharge (cfs)}]}{[\text{07288280 Drainage Area (acres)}]} \right\} * [\text{MS274E and MS275E Drainage Area (acres)}]$$

$$\begin{aligned} \text{Avg Summer Discharge (cfs)} &= \left\{ \frac{[510.83(\text{cfs})]}{[353,919 (\text{acres})]} \right\} * [109,406 (\text{acres})] \\ &= 157.87 \text{ cfs} \end{aligned}$$

4.3 Calculation of the Percent Reduction

For the calculation of the percent reduction, the area under the 10% Test Curve for each season that violates both portions of the standard (Section 2.2.2) is computed and then compared to the area under the Theoretical Capacity Curve, Figure 4. The necessary percent reduction based on the observed data for each season is then calculated using the equation below. This method of calculating the percent reduction allows the data set to be compared to both portions of the water quality standard at the same time. Thus, the calculated percent reduction represents the reduction needed in order for the data set to meet both portions of the water quality standard.

$$\text{Percent Reduction} = \left(1 - \frac{\text{Theoretical Capacity Curve Area}}{10\% \text{ Test Curve Area}} \right) * 100$$

For a season which only violates one portion of the standard, the percent reduction will only be based on the violating portion. The percent reduction calculation for a data set that violates the geometric mean portion of the standard follows.

$$\text{Percent Reduction} = \left(1 - \frac{\text{Geometric Mean of 200 mg/L}}{\text{Actual Geometric Mean of Violating Data Set}} \right) * 100$$

The same could be done for a data set that only violates the 10% of the time portion of the standard.

ALLOCATION

The allocation for this TMDL includes a wasteload allocation (WLA) for point sources, a load allocation (LA) for nonpoint sources, and a margin of safety (MOS).

5.1 Wasteload Allocations

There are 7 NPDES point sources in the Cassidy Bayou Watershed. The point sources and their allocated loads are shown in Table 13. Future permits will be considered in accordance with Mississippi's *Wastewater Regulations for National Pollutant Discharge Elimination System (NPDES) Permits, Underground Injection Control (UIC) Permits, State Permits, Water Quality Based Effluent Limitations and Water Quality Certification*.

Table 13. Wasteload Allocations for Segments MS274E and MS275E

NPDES	Summer Permit Limit Average/Maximum (counts/100ml)	Winter Permit Limit Average/Maximum (counts/100ml)	Average Summer Allocated Load (counts per day)	Average Winter Allocated Load (counts per day)	Permit Modification Necessary
MS0031968	200/400	200/400	7.57E+07	7.57E+07	No
MS0047511	200/400	200/400	1.14E+07	1.14E+07	No
MS0022683	200/400	200/400	4.32E+08	4.32E+08	No
MS0049077	200/400	200/400	2.12E+07	2.12E+07	No
MS0055930	200/400	200/400	3.64E+07	3.64E+07	No
MS0058246	200/400	200/400	1.14E+07	1.14E+07	No
MS0025054	200/400	2000/4000	5.68E+09	5.68E+10	No
Total			6.27E+09	5.74E+10	

5.2 Load Allocations

The load allocation for segments MS274E and MS275E is calculated using the water quality criteria and the average seasonal flow. The load allocation is assumed to represent nonpoint sources as described in section 3.2. In calculating the LA component, the total TMDL for the water body is reduced by a 10% MOS. For this TMDL, the summer load is based on the average daily capacity and the average summer flow of 157.87 cfs. The resulting summer LA is estimated to be 8.21E+11 counts per day. The resulting winter LA is estimated to be 1.83E+12 counts per day using the average winter flow.

Summer

$$LA = 0.9 * 237.65(\text{day} * \text{counts}/100\text{ml}) * 157.87(\text{cfs}) * 2.45\text{E}+07[(100\text{ml} * \text{s})/(\text{ft}^3 * \text{day})] - 6.27\text{E}+09$$

$$LA = 8.21\text{E}+11 \text{ (counts per day)}$$

Winter

$$LA = 0.9 * 237.65(\text{day} * \text{counts}/100\text{ml}) * 360.19(\text{cfs}) * 2.45\text{E}+07[(100\text{ml} * \text{s})/(\text{ft}^3 * \text{day})] - 5.74\text{E}+10$$

$$LA = 1.83\text{E}+12 \text{ (counts per day)}$$

5.3 Incorporation of a Margin of Safety (MOS)

The two types of MOS development are to implicitly incorporate the MOS using conservative assumptions or to explicitly specify a portion of the total TMDL as the MOS. For segments MS274E and MS275E, reducing the TMDL by 10% explicitly specifies the MOS. Assuming the average summer flow, the resulting load attributed to the MOS for the summer is 9.19E+10 counts per day. Assuming the average winter flow, the resulting load attributed to the MOS for the winter is 2.10E+11 counts per day.

Summer

$$\text{MOS} = 0.1 * 237.65(\text{day} * \text{counts}/100\text{ml}) * 157.87(\text{cfs}) * 2.45\text{E}+07[(100\text{ml} * \text{s})/(\text{ft}^3 * \text{day})]$$

$$\text{MOS} = 9.19\text{E}+10 \text{ (counts per day)}$$

Winter

$$\text{MOS} = 0.1 * 237.65(\text{day} * \text{counts}/100\text{ml}) * 360.19(\text{cfs}) * 2.45\text{E}+07[(100\text{ml} * \text{s})/(\text{ft}^3 * \text{day})]$$

$$\text{MOS} = 2.10\text{E}+11 \text{ (counts per day)}$$

5.4 Calculation of the TMDL

The TMDL for segments MS274E and MS275E is calculated based on the following equation:

$$\text{TMDL} = \text{WLA} + \text{LA} + \text{MOS}$$

where WLA is the Waste Load Allocation, LA is the Load Allocation, and MOS is the Margin of Safety.

WLA = NPDES Permitted Facilities

LA = Surface Runoff + Other Direct Inputs

MOS = 10% explicit

The summer TMDL for segments MS274E and MS275E was calculated based on the average summer flow of the water body, and the average daily capacity. The necessary summer percent reduction of fecal coliform to segments MS274E and MS275E is 89%. The winter TMDL was calculated based on the average winter flow of the water body, and the average daily capacity. The winter percent reduction of fecal coliform to segments MS274E and MS275E is 21% based on the 90th percentile portion of the standard which was violated in the winter of 2001.

Summer

$$\text{TMDL} = 237.65(\text{day} \cdot \text{counts}/100\text{ml}) * 157.87(\text{cfs}) * 2.45\text{E}+07[(100\text{ml} \cdot \text{s})/(\text{ft}^3 \cdot \text{day})]$$

$$\text{TMDL} = 9.19\text{E}+11 \text{ (counts per day)}$$

Winter

$$\text{TMDL} = 237.65(\text{day} \cdot \text{counts}/100\text{ml}) * 360.19(\text{cfs}) * 2.45\text{E}+07[(100\text{ml} \cdot \text{s})/(\text{ft}^3 \cdot \text{day})]$$

$$\text{TMDL} = 2.10\text{E}+12 \text{ (counts per day)}$$

Table 14. TMDL Summary for Segments MS274E and MS275E (counts per day)

	Summer	Winter
WLA	6.27E+09	5.74E+10
LA	8.21E+11	1.83E+12
MOS	9.19E+10	2.10E+11
TMDL = WLA + LA +MOS	9.19E+11	2.10E+12

5.5 Seasonality

For many streams in the state, fecal coliform limits vary according to the seasons. This stream is designated for the use of secondary contact. For this use, the fecal coliform standard is seasonal. The criteria for the most critical season, which is the summer for Cassidy Bayou, was used as the target for this TMDL.

MDEQ used the average summer flow for calculating the summer TMDL and the average winter flow for calculating the winter TMDL. Therefore, the seasonal differences are incorporated in the seasonal average flow values.

5.6 Reasonable Assurance

This component of TMDL development does not apply to this TMDL Report. There is no WLA reduction request based on promised LA components and reductions.

CONCLUSION

The TMDL will not impact future NPDES Permits as long as the effluent is disinfected to meet water quality standards for fecal coliform. MDEQ will not approve any NPDES Permit application that does not plan to meet water quality standards for fecal coliform. Education projects that teach best management practices should be used as a tool for reducing nonpoint source contributions. These projects may be funded by CWA Section 319 Nonpoint Source (NPS) Grants.

6.1 Future Monitoring

MDEQ has adopted the Basin Approach to Water Quality Management, a plan that divides Mississippi's major drainage basins into five groups. During each year long cycle, MDEQ resources for water quality monitoring will be focused on one of the basin groups. During the next monitoring phase in the Yazoo River Basin, Piney Creek may receive additional monitoring to identify any change in water quality. MDEQ produced guidance for future Section 319 project funding will encourage NPS restoration projects that attempt to address TMDL related issues within Section 303(d)/TMDL watersheds in Mississippi.

6.2 Public Participation

This TMDL will be published for a 30-day public notice. During this time, the public will be notified by publication in the statewide newspaper. The public will be given an opportunity to review the TMDLs and submit comments. MDEQ also distributes all TMDLs at the beginning of the public notice to those members of the public who have requested to be included on a TMDL mailing list. Anyone wishing to become a member of the TMDL mailing list should contact Kay Whittington at Kay_Whittington@deq.state.ms.us.

All comments should be directed to Kay Whittington at Kay_Whittington@deq.state.ms.us or Kay Whittington, MDEQ, PO Box 10385, Jackson, MS 39289. All comments received during the public notice period and at any public hearings become a part of the record of this TMDL and will be considered in the submission of this TMDL to EPA Region 4 for final approval.

DEFINITIONS

Ambient stations: a network of fixed monitoring stations established for systematic water quality sampling at regular intervals, and for uniform parametric coverage over a long-term period.

Assimilative capacity: the capacity of a natural body of water to receive wastewaters or toxic materials without deleterious effects and without damage to aquatic life or humans who use the water.

Background: the condition of waters in the absence of man-induced alterations based on the best scientific information available to MDEQ. The establishment of natural background for an altered water body may be based upon a similar, unaltered or least impaired, water body or on historical pre-alteration data.

Calibrated model: a model in which reaction rates and inputs are significantly based on actual measurements using data from surveys on the receiving water body.

Critical Condition: hydrologic and atmospheric conditions in which the pollutants causing impairment of a water body have their greatest potential for adverse effects.

Daily discharge: the discharge of a pollutant measured during a 24-hour period that reasonably represents the day for purposes of sampling. For pollutants with limitations expressed in units of mass, the daily discharge is calculated as the total mass of the pollutant discharged over the day. For pollutants with limitations expressed in other units of measurement, the daily discharge is calculated as the average measurement of the pollutant over the day.

Designated Uses: (1) those uses specified in the water quality standards for each water body or segment whether or not they are being attained. (2) those water uses identified in state water quality standards which must be achieved and maintained as required under the Clean Water Act. Uses can include public water supply, recreation, etc.

Discharge monitoring report (DMR): the EPA uniform national form, including any subsequent additions, revisions, or modifications for the reporting of self-monitoring results by permittees.

Effluent: wastewater – treated or untreated – that flows out of a treatment plant or industrial outfall. Generally refers to wastes discharged into surface waters.

Effluent limitation: (1) any restriction established by a State or the Administrator on quantities, rates, and concentrations of chemical, physical, biological, and other constituents which are discharged from point sources into navigable waters, the waters of the contiguous zone, or the ocean, including schedules of compliance. (2) restrictions established by a State or EPA on quantities, rates, and concentrations in wastewater discharges.

Effluent standard: any effluent standard or limitation, which may include a prohibition of any discharge, established or proposed to be established for any toxic pollutant under section 307(a) of the Act.

Fecal Coliform Bacteria: (1) those organisms associated with the intestines of warm-blooded animals that are commonly used to indicate the presence of fecal material and the potential presence of organisms capable of causing human disease. (2) bacteria found in the intestinal tracts of mammals. Their presence in water or sludge is an indicator of pollution and possible contamination by pathogens.

Geometric mean: the n th root of the production of n factors. A 30-day geometric mean is the 30th root of the product of 30 numbers.

Impaired Water Body: any water body that does not attain water quality standards due to an individual pollutant, multiple pollutants, pollution, or an unknown cause of impairment.

Land Surface Runoff: water that flows into the receiving stream after application by rainfall or irrigation. It is a transport method for nonpoint source pollution from the land surface to the receiving stream.

Load allocation (LA): the portion of a receiving water's loading capacity that is attributed either to one of its existing or future nonpoint sources of pollution or to natural background sources. Load allocations are best estimates of the loading, which may range from reasonably accurate estimates to gross allotments, depending on the availability of data and appropriate techniques for predicting the loading. Wherever possible, natural and nonpoint source loads should be distinguished.

Loading: the introduction of waste into a waste management unit but not necessarily to complete capacity.

Mass Balance: a concept based on a fundamental law of physical science (conservation of mass) which says that matter can not be created or destroyed. It is used to calculate all input and output streams of a given substance in a system.

Model: a quantitative or mathematical representation or computer simulation which attempts to describe the characteristics or relationships of physical events.

National pollutant discharge elimination system (NPDES): the national program for issuing, modifying, revoking and reissuing, terminating, monitoring and enforcing permits, and imposing and enforcing pretreatment requirements, under section 307, 402, 318, and 405 of the Clean Water Act.

Nonpoint Source: the pollution sources which generally are not controlled by establishing effluent limitations under section 301, 302, and 402 of the Clean Water Act. Nonpoint source pollutants are not traceable to a discrete identifiable origin, but generally result from land runoff, precipitation, drainage, or seepage.

Outfall: the point where an effluent is discharges into receiving waters

Point Source: a stationery location or fixed facility from which pollutants are discharges or emitted. Also, any single identifiable source of pollution, e.g., a pipe, ditch, ship, ore pit, factory smokestack.

Pollution: generally, the presence of matter or energy whose nature, location or quantity produces undesired environmental effects. Under the Clean Water Act, for example, the term is defined as the man-made or man-induced alteration of the physical, biological, and radiological integrity of water.

Publicly Owned Treatment Works (POTW): the treatment works treating domestic sewage that is owned by a municipality or State.

Regression: a relationship of y and x in a function of $y = f(x)$, where: y is the expected value of an independent random variable x. The parameters in the function $f(x)$ are determined by the method of least squares. When $f(x)$ is a linear function of x, the term linear regression is used.

Regression Coefficient: a quantity that describes the slope and intercept of a regression line.

Scientific Notation (Exponential Notation): mathematical method in which very large numbers or very small numbers are expressed in a more concise form. The notation is based on powers of ten. Numbers in scientific notation are expressed as the following: $4.16 \times 10^{(+b)}$ and $4.16 \times 10^{(-b)}$ [same as $4.16E4$ or $4.16E-4$]. In this case, b is always a positive, real number. The $10^{(+b)}$ tells us that the decimal point is b places to the right of where it is shown. The $10^{(-b)}$ tells us that the decimal point is b places to the left of where it is shown.

For example: $2.7 \times 10^4 = 2.7E+4 = 27000$ and $2.7 \times 10^{-4} = 2.7E-4 = 0.00027$.

Sigma (Σ): shorthand way to express taking the sum of a series of numbers. For example, the sum or total of three amounts 24, 123, 16, (d_1, d_2, d_3) respectively could be shown as:

$$\sum_{i=1}^3 d_i = d_1 + d_2 + d_3 = 24 + 123 + 16 = 163$$

Total Maximum Daily Load or TMDL: (1) the calculated maximum permissible pollutant loading introduced to a water body such that any additional loading will produce a violation of water quality standards. (2) the sum of the individual waste load allocations and load allocations. A margin of safety is included with the two types of allocations so that any additional loading, regardless of source, would not produce a violation of water quality standards.

Waste: (1) useless, unwanted or discarded material resulting from (agricultural, commercial, community and industrial) activities. Wastes include solids, liquids, and gases. (2) any liquid resulting from industrial, commercial, mining, or agricultural operations, or from community activities that is discarded or is being accumulated, stored, or physically, chemically, or biologically treated prior to being discarded or recycled.

Wasteload allocation (WLA): (1) the portion of a receiving water's loading capacity that is allocated to one of its existing or future point sources of pollution. WLAs constitute a type of water quality based effluent limitation. (2) the portion of a receiving water's total maximum daily load that is allocated to one of its existing or future point source of pollution. (3) the maximum load of pollutants each discharger of waste is allowed to release into a particular waterway. Discharge limits are usually required for each specific water quality criterion being, or expected to be, violated. The portion of a stream's total assimilative capacity assigned to an individual discharge.

Water Quality Standards: State-adopted and EPA-approved regulations mandated by the Clean Water Act and specified in 40 CFR 131 that describe the designated uses of a water body, the numeric and narrative water quality criteria designed to protect those uses, and an antidegradation statement to protect existing levels of water quality. Standards are designed to safeguard the public health and welfare, enhance the quality of water and serve the purposes of the Clean Water Act.

Water quality criteria: numeric water quality values and narrative statements which are derived to protect designated uses. Numeric criteria are scientifically-derived ambient concentrations developed by EPA or States for various pollutants of concern to protect human health and aquatic life. Narrative criteria are statements that describe the desired water quality goal. Ambient waters that meet applicable water quality criteria are considered to support their designated uses.

Waters of the State: all waters within the jurisdiction of this State, including all streams, lakes, ponds, wetlands, impounding reservoirs, marshes, watercourses, waterways, wells, springs, irrigation systems, drainage systems, and all other bodies or accumulations of water, surface and underground, natural or artificial, situated wholly or partly within or bordering upon the State, and such coastal waters as are within the jurisdiction of the State, except lakes, ponds, or other surface waters which are wholly landlocked and privately owned, and which are not regulated under the Federal Clean Water Act (33 U.S.C.1252 et seq.).

Watershed: (1) the land area that drains (contributes runoff) into a stream. (2) the land area that drains into a stream; the watershed for a major river may encompass a number of smaller watersheds that ultimately combine at a common delivery point.

ABBREVIATIONS

BMP	Best Management Practice
CAFO	Concentrated Animal Feeding Operation
CWA	Clean Water Act
DMR.....	Discharge Monitoring Report
EPA	Environmental Protection Agency
GIS	Geographic Information System
HCR	Hydrograph Controlled Release
HUC	Hydrologic Unit Code
LA	Load Allocation
MARIS	Mississippi Automated Resource Information System
MDEQ.....	Mississippi Department of Environmental Quality
MOS	Margin of Safety
NRCS	National Resource Conservation Service
NPDES	National Pollution Discharge Elimination System
UNT.....	Unnamed Tributary
USGS	United States Geological Survey
WLA.....	Waste Load Allocation

REFERENCES

- Horner, 1992. Water Quality Criteria/Pollutant Loading Estimation/Treatment Effectiveness Estimation. In R.W. Beck and Associates. Covington Master Drainage Plan. King County Surface Water Management Division, Seattle, WA.
- Horsley & Whitten, Inc. 1996. Identification and Evaluation of Nutrient Bacterial Loadings to Maquoit Bay, Brunswick, and Freeport, Maine. Casco Bay Estuary Project.
- Lee, C.C.. 1998. *Environmental Engineering Dictionary*. 3rd Edition. Government Institutes, Inc., Rockville, Maryland.
- MDEQ. 2004. *Mississippi 2004 Water Quality Assessment, Pursuant to Section 305(b) of the Clean Water Act*. Office of Pollution Control.
- MDEQ. 2004. *Mississippi List of Water Bodies, Pursuant to Section 303(d) of the Clean Water Act*. Office of Pollution Control.
- MDEQ. 2003. *State of Mississippi Water Quality Criteria for Intrastate, Interstate, and Coastal Waters*. Office of Pollution Control.
- MDEQ. 2001. *Wastewater Regulations for National Pollutant Discharge Elimination System (NPDES) Permits, Underground Injection Control (UIC) Permits, State Permits, Water Quality Based Effluent Limitations and Water Quality Certification*. Office of Pollution Control.
- Metcalf and Eddy. 1991. *Wastewater Engineering: Treatment, Disposal, Reuse*. 3rd Edition. McGraw-Hill, Inc., New York.
- NCSU, 1994. *Livestock Manure Production and Characterization in North Carolina*, North Carolina Cooperative Extension Service, North Carolina State University (NCSU) College of Agriculture and Life Sciences, Raleigh, January 1994.
- Sheely. 2002. *Load Duration Curves: Development and Application to Data Analysis for Streams in the Yazoo River Basin, MS*. Special Project, Summer 2002, Jackson Engineering Graduate Program.
- USDA. 2004. *2002 Census of Agriculture*. U.S. Department of Agriculture, National Agricultural Statistics Service, Washington, D.C.
- USEPA. 1986. *Ambient Water Quality Criteria for Bacteria - 1986*. EPA440/5-84-002. Office of Water, Washington, DC.